CLA Lighting

PRODUCT CATALOGUE

issue 2025-2026




CLA LIGHTING

Operating as a 100% Australian owned company, we are proud to have come a long way since we began in 1999, on the Northern Beaches of Sydney. Since its inception, CLA has continuously evolved to keep abreast of the latest in national and international lighting trends to provide benchmark technology in our diverse range of lighting products. These include indoor and outdoor decorative lighting, high-quality energy saving lamps, trendy lighting fixtures and related products for all commercial, industrial, residential and utility markets.

All our products are manufactured to comply with all Australian and New Zealand standards and we are a proud member of the Australian Lighting Council. With warehouses strategically located across Australia & New Zealand, we ensure prompt dispatch and delivery. We use our strength as a lighting leader to provide you with superior customer service, innovative lighting solutions, quality and performance.

This New 2025-2026 catalogue makes us proud to show case the depth in niche product range CLA has to offer.

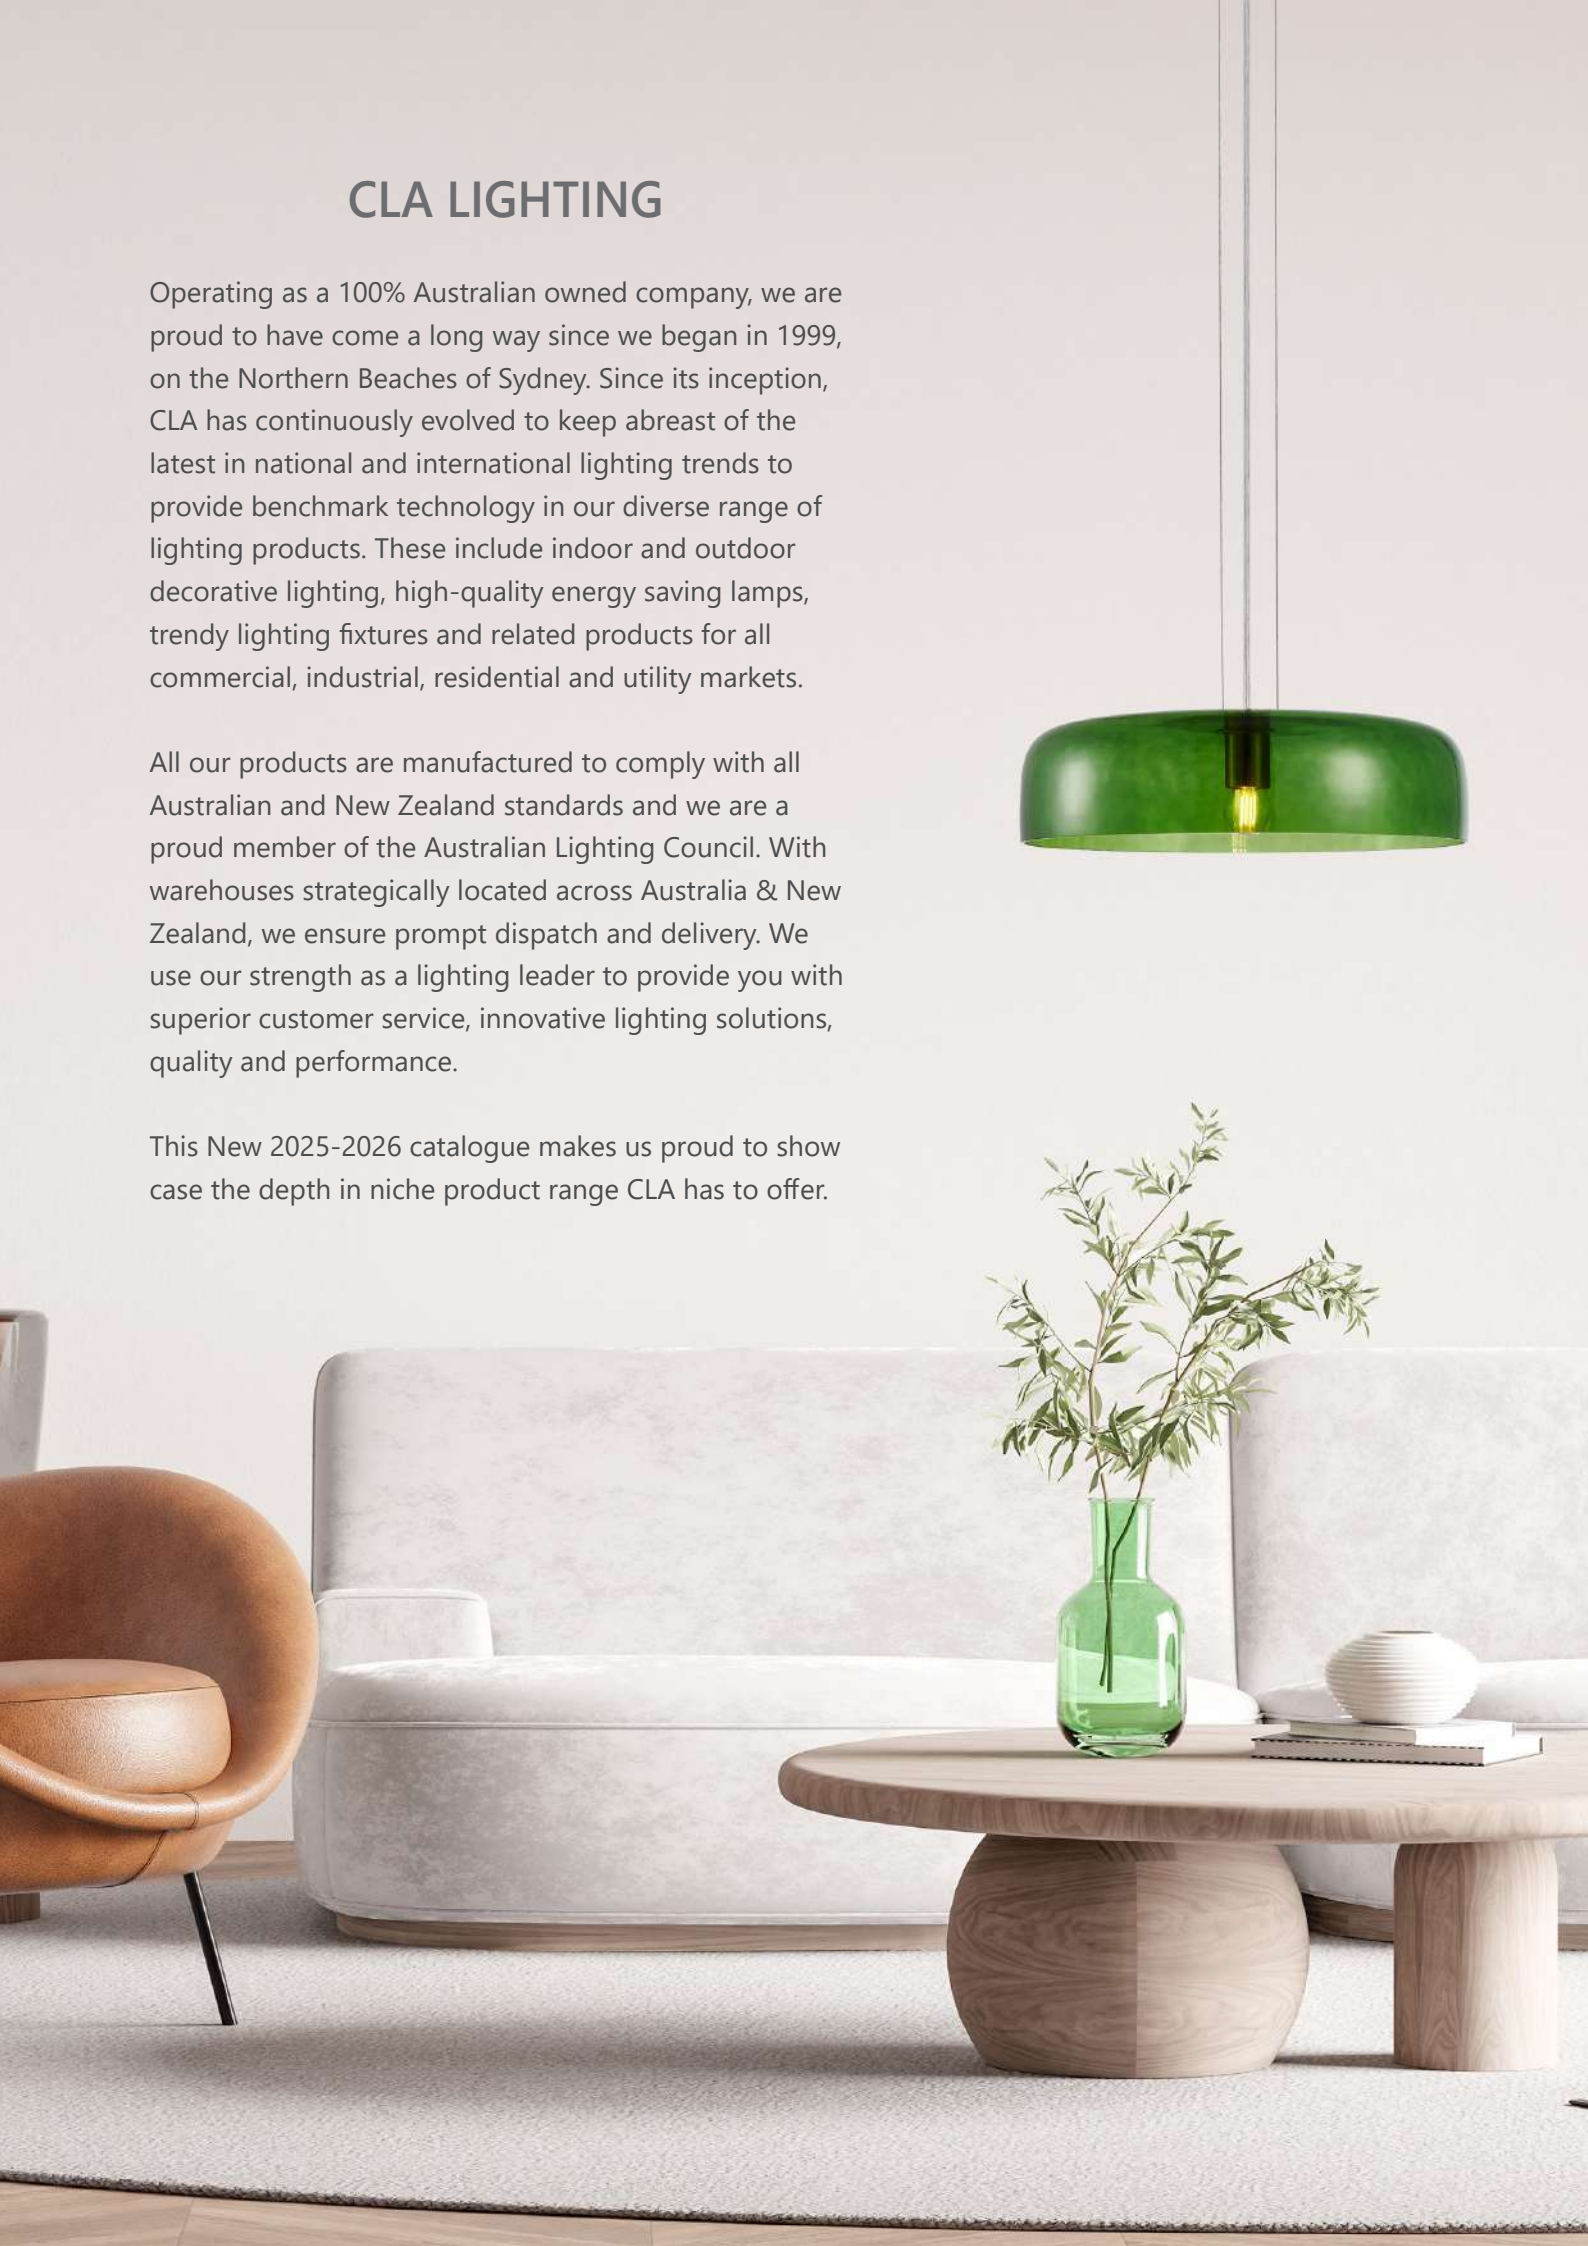

Decor Lighting

Interior Pendant Lights	18-174
Ceiling Spot Lights	175-184
Table & Floor Lamps	185-206
Interior Wall Lights	207-245
D.I.Y. Decor Lighting	246-256

Exterior Lighting

Exterior Pendant Lights	258-259
Exterior Wall Lights	259-301, 353-362
Bulkheads	302-307
Exterior Ceiling / Oyster Lights	308-311
Exterior Step Lights	312-320
Pillar Lights	321-352
Pillar Wall & Bollard Lights	353-365
Garden Spike Lights	366-371
Pond Light	372
Deck Lights & Inground Up Lights	373-377
Flood Lights	378-380
Exterior Battens	381

General Lighting

Downlights	382-399
Oyster Lights	400-405
Battens	406-410
Connectable Track Systems	411-429
Interior Utility Lights	430-436
High Bay	437-438
Security Lights	439-444
Ceiling Fan & Light	445-446

Globes

LED Globes	447-478
Fluorescent Globes	479-481
Carbon Filament Globes	482-485
Heat Lamp Globes	486-487

Accessories

Electrical Accessories	488-507
Control Gear	508-511
Team Brand Products	512-532

Decor ___ Interior Pendant Lights



GELATINA
P 19-21



LABU
P 22-23



ESPIRAL
P 24



HUECA
P 25



FLAUTA
P 26



NETA
P 27



CARAMELLE
P 28



WAND
P 29



KUPOL
P 30-31



KATHAL
P 32



KOLONNE
P 33



PENSHADE
P 34-36



TAZZA
P 37



FUNALE
P 38-41



BARRIQUE
P 42



CALIZ
P 43



PINO
P 44-47



CLESSIDRA
P 48-51



CAMPANA
P 52



FOSSETTA
P 53



MANGA
P 54



VOTIF
P 55



BANQUET
P 56



VIRUN
P 57



MARACA
P 58-59



PELOTA
P 60-61



VINTAJ
P 62-65



BROTE
P 66



MARBRE
P 67



GOLPE
P 68-69



CEREMA
P 70-71



DIABLO
P 72



SARI
P 73



CANAMO
P 74



COUP
P 75



ROTA
P 76


CANASTA
P 77


CESTA
P 78


BOTANICA
P 79


ORIGAMI
P 80


TUILE
P 81


MARRAKESH
P 82-83


PESINI
P 84


PATERA
P 85


JEREZ
P 86-87


CHAMPAN
P 88-89


TRATTINO
P 90-91


TULIP
P 92-93


ESPEJO
P 94-97


CIOTOLA
P 98-99


VINUM
P 100


ROCHE
P 101


IDA
P 102


GOLDA
P 103


MIKRO
P 104


CORAZON
P 105


VAINA
P 106


BELLA
P 107


CLEO
P 108


PASTILLE
P 109


PAPILLON
P 110


CHAPEAU
P 111


HEXADE
P 112


HEXA
P 113


ABBEY
P 114


ESCAMA
P 115


CONTOUR
P 116


KHALEESI
P 117


BONITO
P 118-119


SENORITA
P 120-121


METI
P 122


AUTUMN
P 123


TAMBURA
P 124-125


SWING
P 126-127


HORTEN
P 128


NORDIC
P 129


FARO
P 130


LANTERNA
P 131


ZARA
P 132-133


ARMIS
P 134-135


FINN
P 136


LEGNA
P 137


CELESTE
P 138


MODELLO
P 139


GLAZE1-5
P 140


GLAZE10-11
P 141


RICTUS
P 142


ORDITO
P 143


CHUVA
P 144


LAMINA
P 145


FUMOSO
P 146


CASA
P 147


MASON
P 148-149


TONO
P 150


GAMBA
P 151


MARTE
P 152


CHEVEUX
P 153


STRAND
P 154


SPIAGGIA
P 155


MANU
P 156


VENETO
P 157


SENTINEL
P 158


BLACKBAND
P 159-161


WHITEBAND
P 160-161


MATRIX
P 162


CAVIAR
P 163


PASTEL01-07
P 164


PASTEL08-14
P 165



ALTA
P 166



NARVIK
P 167



DIVO
P 168



DEKSEL
P 170-171



PIATTO
P 172



PEN
P 173



CLUSTER
P 174

Decor ___ Ceiling Spot Lights



LENGAN
P 176-177



SPOT
P 178-179



TACHE
P 180-184

Decor ___ Table & Floor Lamps



KELLO
P 186



CRECER
P 187



JAMBES
P 188



CRISTALLO
P 189



PARAGUAS
P 190



TAZZA
P 191



FLOTAR
P 192-193



COLLO
P 194-195



BANCA
P 196



LUSSO
P 197



TAMBURA
P 198-199



PASTEL
P 200-201



LOTUS
P 202



AUTUMN
P 203



FLATMATE
P 204



PENMATE
P 205



BUDDY
P 206

Decor ___ Interior Wall Lights



SABER
P 208



RACHA
P 209



FLAUTA
P 210



VARILLAS
P 211



TIEMPO
P 212



RODILLO
P 213



BALLE
P 214



OVALIS
P 215



PESINI
P 216-217



CLESSIDRA
P 218



VINUM
P 219



STRUNG
P 220



ALTA
P 221



DEKSEL
P 222



VENETO
P 223



STEAM
P 224



METI
P 225



AUTUMN
P 225



ATLANTA
P226



BRISTOL
P 226



BAGOTA
P 227



CARDIFF
P 228



DHAKA
P 228



HELSINKI
P 228



LIMA
P 229



NAGOYA
P 230



SANTIAGO
P 231



SURAT
P 231



TIJUANA
P 231



ATHENS
P 232



BARCELONA
P 232




CANNES
P 232



DAVOS
P 233



DELHI
P 233



DUBAI
P 233



LONDON
P 234



NEW YORK
P 234



PARIS
P 234



PHOENIX
P 235



RIO
P 235



ROME
P 235



SYDNEY
P 236



VENICE
P 236



VIENNA
P 236



SEATTLE
P 237



CHESTER
P 238



LYON
P 238



BRIGHTON
P 239



VANITAS
P 240-241



LINEAL
P 242-243



VANIDAD
P 244



VANITY
P 245

Decor ___ DIY Decor Lighting



DIYVINTAJ
P 247



DIYBAT01-04
P 248



DIYBAT05-08
P 249



DIYBAT09-12
P 250



DIYBAT13-16
P 251



DIYBAT17-20
P 252



DIYBATC
P 253



SHADE (Drum)
P 254



SHADE (Slant)
P 255



DIYPEN
P 256

Exterior Lighting



TREEC
P 258



SPY
P 259



VILLAKU
P 260



PAROL
P 261



PAYONG
P 262



KEILA
P 263



CUCHARA
P 264



SKOPA
P 265



DEKSEL
P 266



HINK
P 267



MAGNUM
P 268



TORQUE1-2
P 269



TORQUE3-9
P 270



BANDA
P 271



SHADOWTRI
P 272



CRISTAL
P 273



GIRO
P 274-275



BES
P 276




WIG
P 277



HAK
P 278



REPISA
P 279



AKEN
P 280



TOPA
P 281



PLANA
P 282



SOMBRA
P 283



BOCINA
P 284



APIS
P 285



ATEN
P 286



GLANS
P 287



MARINA
P 288



HEKA
P 289



KUK
P 290



OLA
P 291



TOCA
P 292-293



REMO
P 294



VOX
P 295



TAMA
P 296



WEDGE
P 297



NED
P 298

Tri-CCT



OGA
P 299

Tri-CCT



BRICK
P 300-301



BULK1-2
P 302



BULK3
P 303



BULK7A
P 303



BULK9-10
P 304



BULK11-14
P 305




BULK15-18
P 306



CLA4736CB
P 307

Tri-CCT



OYSTRI
P 308

Tri-CCT



OYSDIM
P 309



ULAN
P 310



DOCCIA
P 311



STE3-4
P 312



STE5-6
P 313



STE7-8
P 314



STE9-10, 27
P 315



STE12, 23, 24-25
P 316



STE13-14
P 317



STE15-18
P 318



STE19-22, 26
P 319



STE28-31
P 320



PDL Pillar
P 321-322



SEC05-10
P 323-325



BRILLER
P 326



Pillar Lights
P 327-350



Pillar Bar Lights
P 335-339



SAKUP
P 351



Spot Pillar Lights
P 352



ELANORA
P 353



BORDA
P 354



TORRE
P 355



PHARE
P 356-357



GEB
P 358



AMUN
P 359



SETH
P 360



HORUS
P 361



HATHOR
P 362



SEKER
P 363



TOREN
P 364



BOL
P 365



MESTOLO
P 366



COOLIE
P 367



SPMS
P 368



SPM1A,2A
P 369



PHARE Spike
P 370



KOLEC
P 371



KAM
P 371



Pond Light
P 372



DECK
P 373



Inground Up Lights
P 374-377



SMTFLOOD
P 378



SEC11S
P 379



FLOOD
P 380



SHIELD
P 381

General ___ Downlights



TELE
P 383



TUBO
P 384



GAL
P 385



COMET
P 386-387



SMTNOVA
P 388



FIREFLY
P 389



NOVADLUX
P 390-391



NOVATRIS
P 392



MOTION
P 393



COSMO
P 394



SLICK
P 395



SHOPTRI01
P 396



SHOPTRI
P 397



SURFACE
P 398-399

General ___ Oyster Lights



OYSTRI
P 401



OYSDIM
P 402-403



VINTAJ
P 404



SURFACE
P 405

General ___ Battens



BAT
P 407



RAZORDM
P 408



RAZORDMW
P 409



SHIELD
P 410

General ___ Connectable Track Systems



LED Track Heads
P 412-415



GU10 Track Heads
P 416



Accessories
P 417-429

General ___ Interior Utility Lights



BAT
P 431



RAZORDM
P 432



RAZORDMW
P 433



LINK
P 434



NIGHT
P 435



FRANGO
P 436

General ___ High Bay & Security Lights



HIBTRI
P 438



HIBSENSOR
P 438



SEC01-02
P 440



SEC05-10
P 441-443



SEC11S
P 444

General ___ Ceiling Fan & Light



VIFTU
P 446

Globes ___ LED Globes



SMTGU10
P 448



GU10TRI
P 449


GU10
P 449


GU10 Dimmable
P 450


GU10 RGB
P 450



MR16TRI
P 451


MR16
P 451


MR16 RGB
P 452


MR11
P 452



GLSTRI
P 453


GLS Filament
P 454


GLS Filament
P 454


GLS
P 455-456


FR Filament
P 457


FR Filament
P 457


FR
P 458


Candle Filament
P 459


Candle Filament
P 459


T40
P 460-461


G95 Filament
P 462


G95 Filament
P 462


G125 Filament
P 463


G125 Filament
P 463


G125 Filament
P 464


ST64 Filament
P 465


ST57 Filament
P 465


PAR38
P 466


PAR30
P 467


R63, R80
P 467


PILOT
P 468


T30 Filament
P 468


R7
P 469


SPECTRA
P 470


CHAMA
P 470


BUG
P 471


3U
P 471



GX53
P 472



G9
P 472



G4 BI-PIN
P 473



G4 BI-PIN
P 473



PLC
P 474



ELLIP
P 475



CK
P 476



PT8
P 477-478

Globes ___ Fluorescent Globes



2D FL
P 480



T5 FL
P 480



T9 Circular FL
P 481



PL DU FL
P 481



PL DUE FL
P 481

Globes ___ Carbon Filament Globes



G95
P 483



G125
P 483



ST57
P 484



T45
P 484



T9
P 485

Globes ___ Heat Lamp Globes



CLAHL
P 487

Accessories ___ Electrical Accessories



CLUSTER
P 489



Dimmers
P 490-491



Sensors
P 492-499



Connectors
P 500-501



Sockets
P 502-503



Batten Fixture
P 503



Saddles
P 504



Flex & Plug
P 505



Plugs
P 506



Leads
P 506



Power Boards
P 507

Accessories ___ Control Gear



OTTER 12V IP67
P 509



OTTER 24V IP67
P 510



DRIV 12V IP20
P 510



12V IP20
P 510



Transformer IP20
P 511

Accessories ___ Team Brand Products



Tyre Pump
P 513



Jump Start Charger
P 513-516



LED Load Resistor
P 516



Auto Globes
P 517-519



Microfibre Rags
P 520



Syn Chamois Cloth
P 521



Dry Towel
P 521



Headlight Resto-
ration Kit P 522



Window Repair Kit
P 522



Headlamp Torch
P 523-524



Work Flood Light
P 524



Work Light Torch
P 525



Wireless Charging Pad P 525



PENLIGHT P 526



TWISTTORCH P 526



LITTLEKRAKKA P 527



EXELRIPPA P 527



FLATLIGHT P 528



GRAB-AND-GO P 528



LED65WKL P 528



BIG SLIM P 529



SLIM BENDY P 530



ROCKY P 530



LED41WKL P 531



TOE2530PRO P 531



EX-288 P 531



EX-188 P 532

ATTENTION:

The pendant lights are hand made items, so the colour and shape of each piece may vary slightly. Please check that you are happy with the quality and finish of these products BEFORE INSTALLATION. CLA LIGHTING offer a replacement warranty only. Installation costs will not be borne by CLA Lighting.

All products comply with "all Australian and NZ Standards"

All images and information in this publication are current at the time of print and are to be used as a guide only. Please refer to our website **www.clalighting.com.au** prior to purchase for updates since the print of this publication or email us at
sales@clalighting.com.au or call our Sydney office on **(02) 9938 7100.**



DECOR LIGHTING | INTERIOR PENDANT LIGHTS

This is a hand made item, so the colour and shape of each piece may vary slightly. Actual colours may vary. This is due to the fact that every computer monitor has a different capability to display colours and that everyone sees these colours differently. We try to edit our photos to show the samples as life-like as possible, but please understand the actual colour may vary slightly from your monitor. We cannot guarantee that the colour you see accurately portrays the true colour of the product. Please check that you are happy with the quality and finish of this product BEFORE INSTALLATION.

Gelatina Interior Pendant Lights






GELATINA1
(Smokey Black Glass)



GELATINA2
(Orange Glass)





GELATINA3
(Green Glass)

- Interior dome glass with brass highlight pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**GELATINA1, GELATINA2, GELATINA3**
Description	PENDANT ES 40W Glass with Brass Highlight Dome
Material	Iron & glass
Lamp holder	1xE27 (Max.40W)
Product Dimensions	Ø420xH140mm
Suspension	3000mm PVC clear cable
Canopy size	Ø100x25mm
Carton QTY	1/1








GELATINA4
(Smokey Black Glass)



GELATINA5
(Orange Glass)





GELATINA6
(Green Glass)

- Interior triple dome glass with brass highlight pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**GELATINA4, GELATINA5, GELATINA6**
Description	PENDANT ES 40W Glass with Brass Highlight Dome
Material	Iron & glass
Lamp holder	1xE27 (Max.40W)
Product Dimensions	Ø420xH250mm
Suspension	3000mm PVC clear cable
Canopy size	Ø100x25mm
Carton QTY	1/1




Labu Interior Pendant Lights





LABU1
(Clear Glass)





LABU2
(Amber Glass)

- Interior dome glass with segments pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty


Part No.	**LABU1, LABU2**
Description	PENDANT ES 40W Glass with Segments Dome
Material	Iron & glass
Lamp holder	1xE27 (Max.40W)
Product Dimensions	Ø400xH320mm
Suspension	3000mm PVC clear cable
Canopy size	Ø100x25mm
Carton QTY	1/1





Espiral Interior Pendant Lights



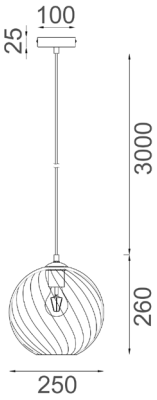



ESPIRAL1
(Smokey Black)



ESPIRAL2
(Coffee)

- Interior wine glass wavy finish round pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**ESPIRAL1, ESPIRAL2**
Description	PENDANT ES 72W Wine Glass Wavy Finish Highlight
Material	Iron & glass
Lamp holder	1xE27 (Max.72W)
Product Dimensions	Ø250xH260mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Hueca Interior Pendant Lights







HUECA1
(Smokey Black)



HUECA2
(Amber)

- Interior double cylinder ribbed with segment pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**HUECA1, HUECA2**
Description	PENDANT ES 72W Double Cylinder Ribbed with Segment
Material	Iron & glass
Lamp holder	1xE27 (Max.72W)
Product Dimensions	Ø130xH300mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Flauta Interior Pendant Lights







FLAUTA1
(Smokey Black)



FLAUTA2
(Amber)



FLAUTA interior wall lights are also available

- Interior round top cylinder ribbed pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only

E14 | 1YEAR Replacement Warranty

Part No.	**FLAUTA1, FLAUTA2**
Description	PENDANT SES 40W Round Top Cylinder Ribbed
Material	Iron & glass
Lamp holder	1xE14 (Max.40W)
Product Dimensions	Ø100xH370mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Neta Interior Pendant Lights





NETA1
(Smokey Black)


NETA2
(Amber)

NETA3
(Coffee)



NETA4
(Blue)

NETA4
(Purple)



- Interior wine glass segmented pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**NETA1-5**
Description	PENDANT ES 72W Wine Glass Segmented with Highlight
Material	Iron & glass
Lamp holder	1xE27 (Max.72W)
Product Dimensions	Ø180xH250mm
Suspension	3000mm PVC cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Carmelle Interior Pendant Lights LED Tri-CCT



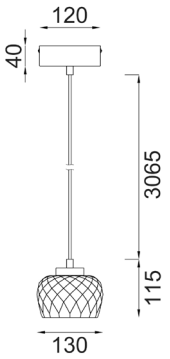



CARAMELLE1
(Smokey Black Glass)



CARAMELLE2
(Amber Glass)

- Interior LED Tri-CCT with Segments Ellipse pendant lights
- Material: glass & iron
- Tri-CCT (3000K / 4000K / 6000K) in one fitting
- Inline CCT switch under the canopy
- LED chips: 2835
- CRI: 80
- Power factor: 0.65
- Ambient temperature: -20 to 50°C
- For indoor use only
- Not suitable for dimming




Part No.	**CARAMELLE1, CARAMELLE2**
Description	Pendant LED Glass w/Segments Shade & Frosted Diffuser with Highlight Ellipse
Material	Iron & glass
Wattage	5W
Kelvin	3000K / 4000K / 6000K
Lumens	CARAMELLE1: 169LM / 182LM / 174LM CARAMELLE2: 263LM / 281LM / 266LM
Product Dimensions	Ø130xH115mm
Suspension	3000mm PVC black cable
Canopy size	Ø120x40mm
Carton QTY	1/10



Wand Interior Pendant Lights LED Tri-CCT



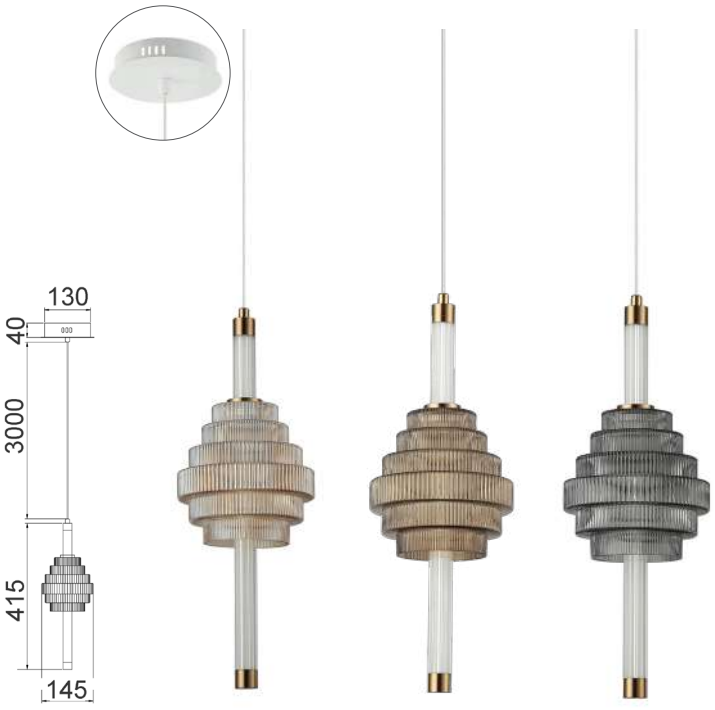

WAND1
(Amber)

WAND2
(Coffee)

WAND3
(Smokey Grey)

- Interior LED Tri-CCT spinning top pendant lights
- Material: glass & metal
- Tri-CCT (3000K / 4000K / 6000K) in one fitting
- Inline CCT switch under the canopy
- CRI: 80
- Power factor: 0.92
- Ambient temperature: -20 to 50°C
- For indoor use only
- Not suitable for dimming



Part No.	**WAND1, WAND2, WAND3**
Description	PENDANT LED Spinning Top 5W Tri
Material	Glass & metal
Wattage	5W
Kelvin	3000K / 4000K / 6000K
Lumens	WAND1: 484LM / 516LM / 498LM WAND2: 457LM / 478LM / 461LM WAND3: 399LM / 421LM / 411LM
Product Dimensions	Ø145xH415mm
Suspension	3000mm PVC clear cable
Canopy size	Ø130x40mm
Carton QTY	1/1



Kupol Interior Pendant Lights LED Tri-CCT





KUPOL1
(White)




KUPOL2
(Black)

- Interior LED Tri-CCT dome with brass highlight pendant lights
- Material: metal
- Tri-CCT (3000K / 4000K / 6000K) in one fitting
- Inline CCT switch under the canopy
- Not suitable for dimming
- For indoor use only

20,000hr Lifetime | IP20 Rated | 2YEAR Replacement Warranty

Part No.	**KUPOL1, KUPOL2, KUPOL3**
Description	Pendant LED Dome 8W Tri
Material	Metal
Kelvin	3000K / 4000K / 6000K
Lumens	KUPOL1: 283lm / 312lm / 290lm KUPOL2: 101lm / 109lm / 102lm KUPOL3: 125lm / 134lm / 122lm
Wattage	8W
Product Dimensions	Ø350xH190mm
Suspension	3000mm cable
Canopy size	Ø130x40mm
Carton QTY	1/1





KUPOL3
(Coffee)



Kathal Interior Pendant Lights





- Interior ellipse glass segmented with brass highlight enclosed pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only


E14 | 1 YEAR Replacement Warranty

Part No.	KATHAL1-5
Description	PENDANT SES Ellipse Glass Segmented with Brass highlight Enclosed
Material	Iron & glass
Lamp holder	1xE14 (Max.10W)
Product Dimensions	Ø150xH290mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Kolonne Interior Pendant Lights







KOLONNE1 (Black) **KOLONNE2** (White) **KOLONNE3** (Gold)

- Interior GU10 ribbed cylinder pendant lights
- Material: iron & aluminium
- Globe not included
- For indoor use only


GU10 | 1YEAR Replacement Warranty

Part No.	**KOLONNE1, KOLONNE2, KOLONNE3**
Description	PENDANT GU10 Aluminium Ribbed Cylinder
Material	Iron & aluminium
Lamp holder	1xGU10 (Max.10W)
Product Dimensions	Ø65xH270mm
Suspension	3000mm PVC cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Penshade Interior Pendant Lights







PENSHADE1
(Flower Pattern / Black)



PENSHADE2
(Flower Pattern / White)

- Interior slanted with flower pattern laser cut pendant lights
- Shade interior colour: gold
- Lamp holder: 1xE27 (Max.60W)
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**PENSHADE1, PENSHADE2**
Description	PENDANT ES with Gold Interior Iron Slanted with Laser Cut Flower Pattern
Material	Iron
Lamp holder	1xE27 (Max.60W)
Product Dimensions	Ø350xH250mm
Suspension	3000mm PVC cable
Canopy size	Ø100x25mm
Carton QTY	1/1







PENSHADE3
(Eiffel Tower Pattern / Black)



PENSHADE4
(Eiffel Tower Pattern / White)



PENSHADE5
(Fleur Pattern / Black)



PENSHADE6
(Fleur Pattern / White)



PENSHADE7
(Starburst Pattern / Black)



PENSHADE8
(Starburst Pattern / White)




PENSHADE9
(Maple Leaf Pattern / Black)



PENSHADE10
(Maple Leaf Pattern / White)

- Interior slanted with laser cut pendant lights
- Shade interior colour: gold
- Lamp holder: 1xE27 (Max.60W)
- Globe not included
- For indoor use only





Part No.	**PENSHADE3-18**
Description	PENDANT ES with Gold Interior Iron Slanted with Laser Cut
Material	Iron
Lamp holder	1xE27 (Max.60W)
Product Dimensions	Ø350xH250mm
Suspension	3000mm PVC cable
Canopy size	Ø100x25mm
Carton QTY	1/1







PENSHADE11
(Vector Pattern / Black)



PENSHADE12
(Vector Pattern / White)



PENSHADE13
(Geometry Pattern / Black)



PENSHADE14
(Geometry Pattern / White)



PENSHADE15
(Tree Pattern / Black)



PENSHADE16
(Tree Pattern / White)



PENSHADE17
(Honeycomb Pattern / Black)




PENSHADE18
(Honeycomb Pattern / White)

Tazza Interior Pendant Lights





TAZZA1
(Matte Black & Aged Brass Highlight)



- Interior black ellipse with aged brass hardware pendant lights
- Shade interior colour: matte black
- Lamp holder: 3xE27 (Max.60W)
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**TAZZA1**
Description	PENDANT 3xES Matte Black with Aged Brass Hardware
Material	Iron
Lamp holder	3xE27 (Max.60W)
Product Dimensions	L554 x H158mm
Suspension	1200mm PVC black cable
Canopy size	L270 x W 40 x H25mm
Carton QTY	1/1



TAZZA table lamps are also available



Funale Interior Pendant Lights






FUNALE1
(6xE14)





FUNALE2
(8xE14)



FUNALE3
(12xE14)








- Interior candelabra natural wood with oil rubbed bronze hardware pendant lights
- Material: solid wood & iron
- Lamp holder: E14 (Max.60W)
- Globe not included
- For indoor use only

E14 | 1 YEAR Replacement Warranty

Part No.	**FUNALE1, FUNALE2, FUNALE3**
Description	PENDANT SES Candelabra Natural Wood with Oil Rubbed Bronze Hardware
Material	Solid wood & Iron
Lamp holder	FUNALE1: 6xE14 (Max.60W) FUNALE2: 8xE14 (Max.60W) FUNALE3: 12xE14 (Max.60W)
Product Dimensions	Please see line drawings
Suspension	3000mm chain & cable
Canopy size	FUNALE1-2: Ø135x23mm FUNALE3: Ø160x25mm
Carton QTY	1/1



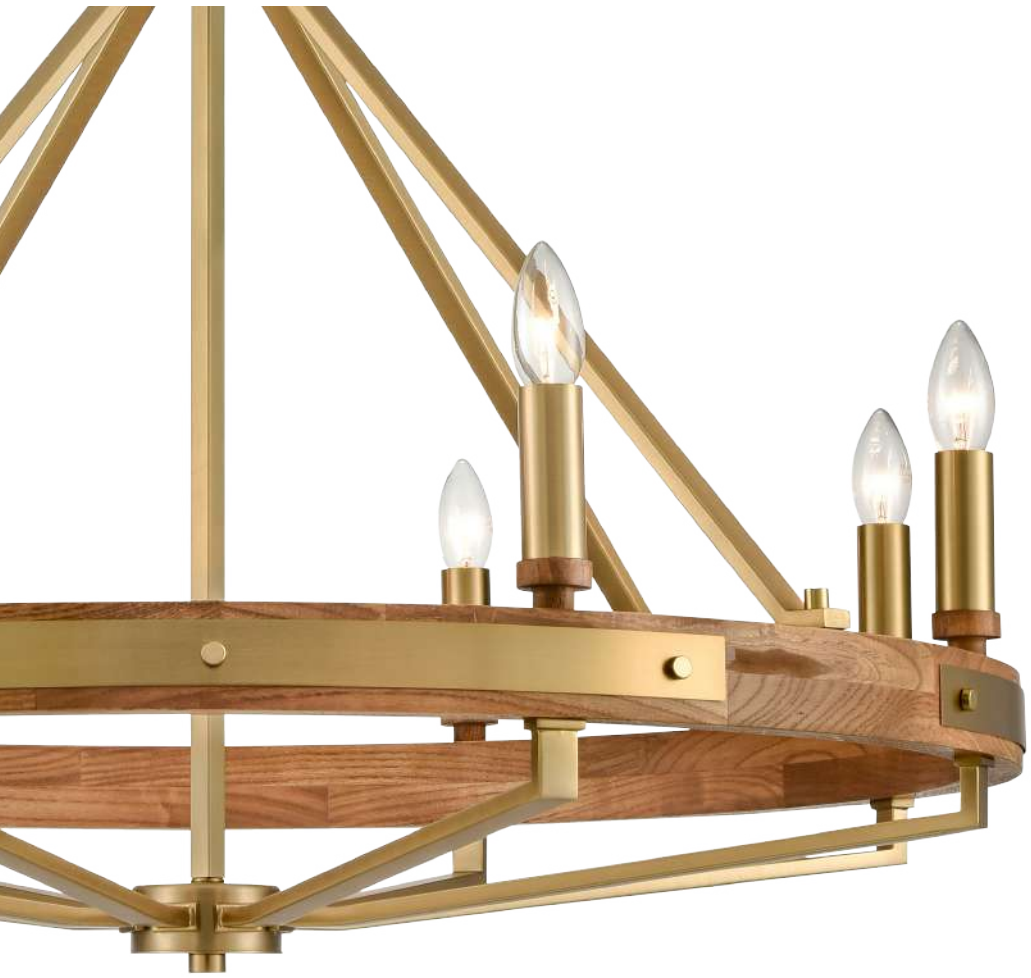




FUNALE4
(6xE14)





FUNALE5
(8xE14)



FUNALE6
(12xE14)







- Interior candelabra oak wood & satin brass hardware pendant lights
- Material: solid wood & iron
- Lamp holder: E14 (Max.60W)
- Globe not included
- For indoor use only

E14 | 1YEAR Replacement Warranty

Part No.	**FUNALE4, FUNALE5, FUNALE6**
Description	PENDANT SES Candelabra Oak Wood & Satin Brass Hardware
Material	Solid wood & Iron
Lamp holder	FUNALE4: 6xE14 (Max.60W) FUNALE5: 8xE14 (Max.60W) FUNALE6: 12xE14 (Max.60W)
Product Dimensions	Please see line drawings
Suspension	3000mm chain & cable
Canopy size	FUNALE4-5: Ø135x23mm FUNALE6: Ø160x25mm
Carton QTY	1/1



Barrique Interior Pendant Lights






BARRIQUE1
(Medium Oak Wood with Satin Brass Hardware)



BARRIQUE2
(Natural Wood with Oil Rubbed Bronze Hardware)

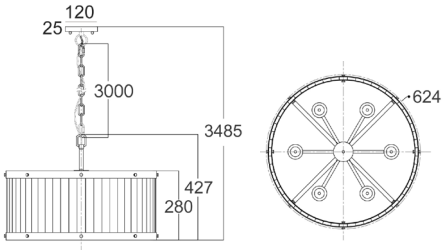

- Interior drum wood pendant lights
- Material: wood & iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**BARRIQUE1, BARRIQUE2**
Description	PENDANT ES 6 x 60W Large Drum Wood With hardware
Material	Wood
Lamp holder	6xE27 (Max.60W)
Dimensions	Ø624 x H427mm
Suspension	3000mm cable & chain
Canopy size	Ø120 x H25mm
Carton QTY	1/1



Caliz Interior Pendant Lights





CALIZ1
(Ø250mm)

CALIZ3
(Ø250mm)



CALIZ2
(Ø200mm)

CALIZ4
(Ø200mm)

- Interior frosted wine glass ribbed pendant lights
- Material: iron & frosted glass
- Lamp holder: 1xE27 (Max.72W)
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CALIZ1-4**
Description	PENDANT ES Frosted Wine Glass Ribbed With Long Brass / Black highlight
Material	Iron & frosted glass
Lamp holder	1xE27 (Max.72W)
Product Dimensions	CALIZ1 & 3: Ø250xH430mm CALIZ2 & 4: Ø200xH380mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Pino Interior Pendant Lights





PINO1
(Round)



PINO2
(Oval)



PINO3
(Jar)




PINO4X3R
(Multiple Shapes)

- Interior opal matte glass with brass highlight pendant lights
- Material: iron & matte glass
- Lamp holder: 1xE14 (Max.10W)
- Globe not included
- For indoor use only

E14 | 1 YEAR Replacement Warranty

Part No.	**PINO1, PINO2, PINO3, PINO4X3R**
Description	PENDANT SES Opal Matte Glass with Brass Highlight
Material	Iron & glass
Lamp holder	PINO1-3: 1xE14 (Max.10W) PINO4X3R: 3xE14 (Max.10W)
Product Dimensions	Please see the line drawings
Suspension	3000mm PVC clear cable
Canopy size	PINO1-3: Ø100x25mm PINO4X3R: Ø300x25mm
Carton QTY	1/1

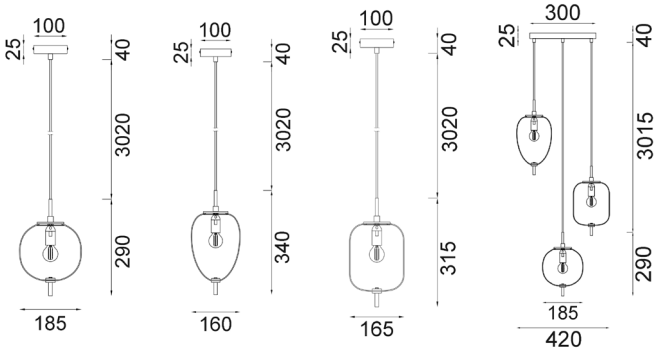

DECOR







PINO5
(Round)



PINO6
(Oval)



PINO7
(Jar)




PINO8X3R
(Multiple Shapes)

- Interior smokey black mirror finish glass with black highlight pendant lights
- Material: iron & glass
- Lamp holder: 1xE14 (Max.10W)
- Globe not included
- For indoor use only

E14 | 1YEAR Replacement Warranty

Part No.	**PINO5, PINO6, PINO7, PINO8X3R**
Description	PENDANT SES Smokey Black Mirror Finish Glass with Black Highlight
Material	Iron & glass
Lamp holder	PINO5-7: 1xE14 (Max.10W) PINO8X3R: 3xE14 (Max.10W)
Product Dimensions	Please see the line drawings
Suspension	3000mm PVC black cable
Canopy size	PINO5-7: Ø100x25mm PINO8X3R: Ø300x25mm
Carton QTY	1/1

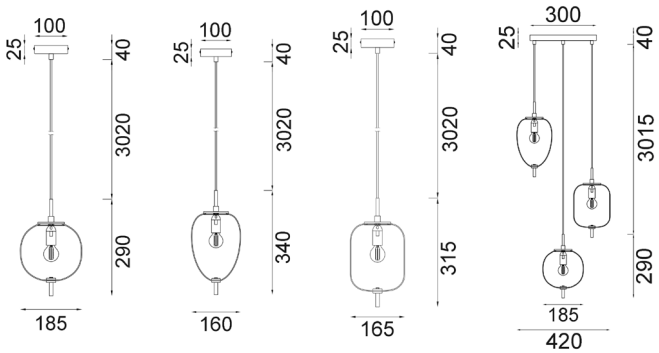





Clessidra Interior Pendant Lights




CLESSIDRA3
(12xE27)




CLESSIDRA1
(1xE27)



CLESSIDRA1X3R
(3xE27)





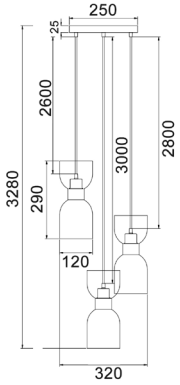

- Interior ellipse smokey black mirror finished glass pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty


Part No.	**CLESSIDRA1, CLESSIDRA1X3R, CLESSIDRA3**
Description	PENDANT Smokey Black Mirror Finished Glass Ellipse
Material	Iron & glass
Lamp holder	E27 (Max.72W)
Product Dimensions	Please see the line drawing
Suspension	CLESSIDRA1: 3000mm cable CLESSIDRA1X3R: 2600/ 2800/ 3000mm cable CLESSIDRA3: 300mm Rod
Canopy size	CLESSIDRA1: Ø100x25mm CLESSIDRA1X3R: Ø250x25mm CLESSIDRA3: Ø110x25mm
Carton QTY	1/1






CLESSIDRA4
(12xE27)





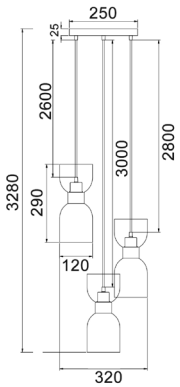



CLESSIDRA2
(1xE27)



CLESSIDRA2X3R
(3xE27)

- Interior ellipse opal glass pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only






CLESSIDRA Interior wall lights are also availale

Part No.	**CLESSIDRA2, CLESSIDRA2X3R, CLESSIDRA4**
Description	PENDANT Opal Glass Ellipse
Material	Iron & glass
Lamp holder	E27 (Max.72W)
Product Dimen-sions	Please see the line drawing
Suspension	CLESSIDRA2: 3000mm cable CLESSIDRA2X3R: 2600/ 2800/ 3000mm cable CLESSIDRA4: 300mm Rod
Canopy size	CLESSIDRA2: Ø100x25mm CLESSIDRA2X3R: Ø250x25mm CLESSIDRA4: Ø110x25mm
Carton QTY	1/1



Campana Interior Pendant Lights



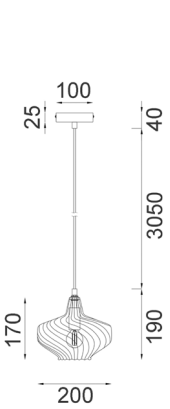



CAMPANA1
(Amber)



CAMPANA2
(Mirror Finish Smokey Black)



CAMPANA3
(Purple)



CAMPANA4
(Green)

- Interior wine glass shape ribbed pendant lights
- Material: iron & glass
- Lamp holder: 1xE14 (Max.72W)
- Globe not included
- For indoor use only


E14 | 1 YEAR Replacement Warranty

Part No.	**CAMPANA1-4**
Description	PENDANT SES Wine Glass Ribbed with Brass Highlight
Material	Iron & glass
Lamp holder	1xE14 (Max.72W)
Product Dimensions	Ø200xH190mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Fossetta Interior Pendant Lights



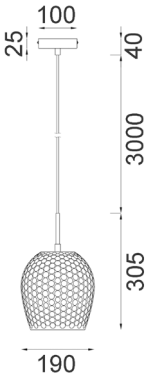



FOSSETTA1
(Amber)



FOSSETTA2
(Mirror Finish Smokey Black)

- Interior wine glass shape dimpled pendant lights
- Material: iron & glass
- Lamp holder: 1xE27 (Max.72W)
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**FOSSETTA1, FOSSETTA2**
Description	PENDANT T ES Amber / Mirror Finish Smokey Black Wine Glass Dimpled
Material	Iron & glass
Lamp holder	1xE27 (Max.72W)
Product Dimensions	Ø190xH305mm
Suspension	3000mm PVC black cable
Canopy size	Ø100x25mm
Carton QTY	1/1



Manga Interior Pendant Lights







MANGA1 (Smokey Black) | **MANGA2** (Green) | **MANGA3** (Blue) | **MANGA4** (Amber) | **MANGA5** (Clear)

- Interior glass cylinder pendant light
- Material: glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**MANGA1-5**
Description	PENDANT ES Glass Cylinder OD80mm
Material	Glass
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø80 x H345mm
Suspension	3000mm clear cable
Canopy size	Ø100 x H25mm
Carton QTY	1/10




Votif Interior Pendant Lights





VOTIF1

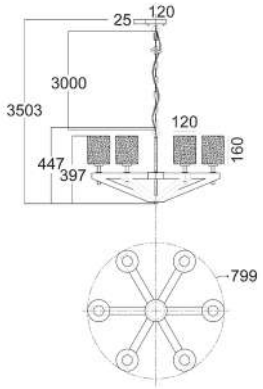

- Interior candelabra wood pendant light
- Material: wood, iron & glass
- Globe not included
- For indoor use only

E27


1YEAR Replacement Warranty

Part No.	VOTIF1
Description	PENDANT ES 6 x 60W Candelabra Oak Wood Oil Rubbed Bronze Hardware & Clear blown Glass
Material	Wood, iron & glass
Lamp holder	6xE27 (Max.60W)
Dimensions	Ø799 x H447mm
Suspension	3000mm cable & chain
Canopy size	Ø120x 25mm
Carton QTY	1/1



Banquet Interior Pendant Lights



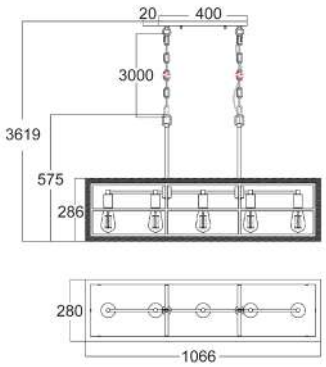



BANQUET1

- Interior rectangular wood frame pendant light
- Material: wood & iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**BANQUET1**
Description	PENDANT ES 5 x 60W Rect Frame Medium Oak Wood With Oil Rubbed Bronze Hardware
Material	Wood & iron
Lamp holder	5xE27 (Max.60W)
Dimensions	L1066 x W280 x H286mm
Suspension	3000mm cable & chain + 289mm rod
Canopy size	L400 x W130 x H20mm
Carton QTY	1/1




Virun Interior Pendant Lights





VIRUN1



- Interior rectangular wood frame pendant light
- Material: wood & iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**VIRUN1**
Description	PENDANT ES 4 x 72W Rectangular Natural wood & iron
Material	Wood & iron
Lamp holder	4xE27 (Max.72W)
Dimensions	L800 x W150 x H185mm
Suspension	3000mm black cable
Canopy size	L250 x W50 x H25mm
Carton QTY	1/1



Maraca Interior Pendant Lights





MARACA1
(Smokey Glass &
Antique Brass Highlight)



MARACA2
(Green Glass & Black
Highlight)



MARACA3
(Amber Glass & Black
Highlight)



MARACA4
(Copper Glass & Black
Highlight)


- Interior wine glass quadrilateral segment pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	MARACA1-5
Description	PENDANT ES 72W Wine Glass with Quadrilateral Segment & Highlight
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø200 x H295mm
Suspension	3000mm black cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1




MARACA5
(Matte Gold Glass &
Antique Brass Highlight)





Pelota Interior Pendant Lights



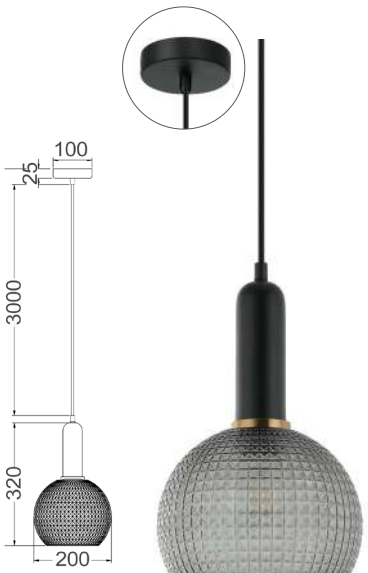

PELOTA1
(Smokey Black)



PELOTA2
(Green)



PELOTA3
(Amber)



PELOTA4
(Copper Painted)



PELOTA5
(Chrome)



PELOTA6
(Clear)

- Interior wine glass segmented glass pendant lights
- Material: glass
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**PELOTA1-6**
Description	PENDANT ES Wine Glass Segmented Glass
Material	Glass
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø200 x H320mm
Suspension	3000mm black cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1



Vintaj Interior Pendant Lights



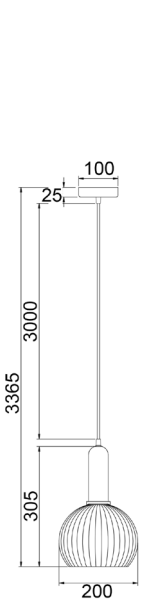



VINTAJ1
(Smokey Black)



VINTAJ2
(Green)



VINTAJ3
(Amber)



VINTAJ4
(Copper Painted)



VINTAJ5
(Chrome)



VINTAJ6
(Clear)

- Interior wine glass ribbed glass pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**VINTAJ1-6**
Description	PENDANT ES Wine Glass Ribbed Glass with Brass
Material	Glass
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø200 x H305mm
Suspension	3000mm black cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1





VINTAJ7
(Smokey Black)



VINTAJ8
(Green)



VINTAJ9
(Amber)




VINTAJ10
(Copper Painted)

- Interior ellipse ribbed glass pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27

1YEAR Replacement Warranty

Part No.	**VINTAJ7-12**
Description	PENDANT ES Ellipse Ribbed Glass with Brass
Material	Glass
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø140 x H310mm
Suspension	3000mm black cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1





VINTAJ11
(Chrome)



VINTAJ12
(Clear)





VINTAJ13
(Smokey Black)



VINTAJ14
(Green)




VINTAJ15
(Amber)



VINTAJ16
(Copper Painted)

- Interior dome ribbed glass pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty



Part No.	**VINTAJ13-18**
Description	PENDANT ES Dome Ribbed Glass with Brass
Material	Glass
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø200 x H275mm
Suspension	3000mm black cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1



VINTAJ17
(Chrome)



VINTAJ18
(Clear)



Brote Interior Pendant Lights





BROTE1
(Amber Glass & Bronze Highlight)



BROTE2
(Smokey Black Mirror Finished Glass & Black Highlight)

- Interior wine glass shape pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**BROTE1, BROTE2**
Description	PENDANT ES 72W Wine Glass
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø180 x H350mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Marbre Interior Pendant Lights






MARBRE1
(Smokey Black)

MARBRE2
(Green)



MARBRE3
(Amber)





- Interior wine glass shape pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27

1YEAR Replacement Warranty

Part No.	MARBRE1-3
Description	PENDANT ES Wine Glass Wavy Glass
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø170 x H180mm
Suspension	3000mm black cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1

Golpe Interior Pendant Lights







GOLPE1
(Black / Small)
GOLPE3
(Black / Large)



GOLPE2
(Champagne Gold / Small)
GOLPE4
(Champagne Gold / Large)



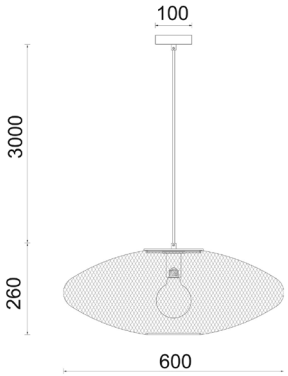

- Interior oval stainless steel pendant lights
- Material: stainless steel
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	GOLPE1-4
Description	PENDANT ES 60W Oval Black / Champagne Gold Small / Large Stainless Steel
Material	Stainless steel
Lamp Holder	1xE27 (Max.60W)
Dimensions	GOLPE1-2: Ø400 x H250mm GOLPE3-4: Ø600 x H260mm
Suspension	3000mm PVC black cable
Canopy Size	Ø100mm
Carton QTY	1/1



Cerema Interior Pendant Lights





CEREMA1
(Ellipse)




CEREMA2
(Angled dome)





CEREMA3
(Coolie)




CEREMA4
(Small Coolie)



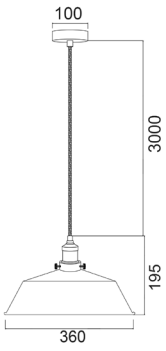

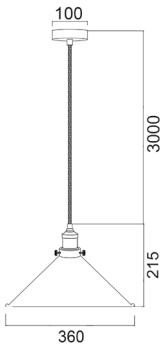



- Interior white with antique brass and black highlight pendant lights
- Material: bamboo
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CEREMA1-4**
Description	PENDANT ES 40W White With Antique Brass & Black Highlight
Material	Metal
Lamp holder	1xE27 (Max.40W)
Dimensions	CEREMA1: Ø205 x H235mm CEREMA2: Ø360 x H195mm CEREMA3: Ø360 x H215mm CEREMA4: Ø220 x H140mm
Suspension	3000mm white cable
Canopy size	Ø100mm
Carton QTY	1/1



Diablo Interior Pendant Lights






DIABLO1
(Black)



DIABLO2
(White)



- Interior cone flat top pendant light
- Material: iron
- Globe not included
- For indoor use only

E27

1 YEAR Replacement Warranty

Part No.	**DIABLO1, DIABLO2**
Description	PENDANT ES Cone Flat Top
Material	Iron
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø250 x H235mm
Suspension	3000mm cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1



Sari Interior Pendant Lights







SARI1
(Aged Brass Steel)



SARI12
(Chrome Steel)




- Interior embossed ellipse pendant lights
- Material: metal
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty


Part No.	**SARI1, SARI2**
Description	PENDANT ES 60W Embossed Ellipse
Material	Metal
Lamp holder	1xE27 (Max.60W)
Dimensions	Ø310 x H320mm
Suspension	3000mm black cable
Canopy size	Ø100 x H25mm
Carton QTY	1/1

Canamo Interior Pendant Lights

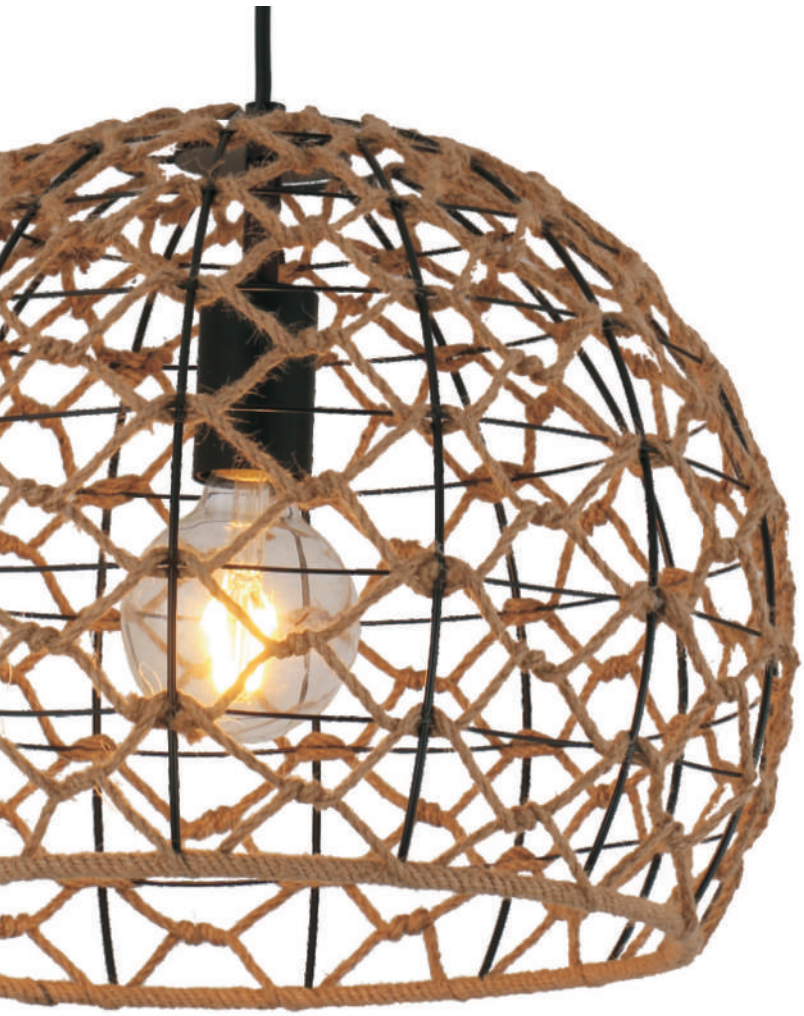



CANAMO1
(Ellipse Shape)

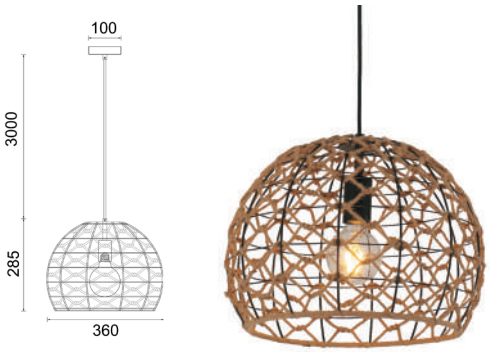

CANAMO2
(Wine Glass Shape)

- Interior hemp rope pendant lights
- Material: steel and hemp rope
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CANAMO1, CANAMO2**
Description	PENDANT ES 40W Natural Hemp Rope & Black Hardware
Material	Steel & Hemp rope
Lamp holder	1xE27 (Max.40W)
Dimensions	CANAMO1: Ø300 x H320mm CANAMO2: Ø360 x H285mm
Suspension	3000mm black cable
Canopy size	Ø100mm
Carton QTY	1/1



Coup Interior Pendant Lights





COUP1




- Interior rattan ellipse pendant lights
- Material: rattan
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**COUP1**
Description	PENDANT ES 60W Rattan Ellipse Matte Black
Material	Rattan
Lamp holder	1xE27 (Max.40W)
Dimensions	Ø340 x H350mm
Suspension	3000mm black cable
Canopy size	Ø100mm
Carton QTY	1/1

Rota Interior Pendant Lights



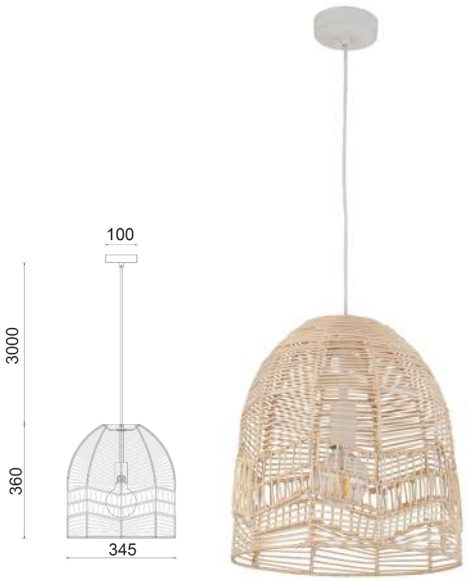

ROTA1

- Interior rattan ellipse pendant light
- Material: rattan
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ROTA1**
Description	PENDANT ES 40W Natural Rattan Ellipse White
Material	Rattan
Lamp holder	1xE27 (Max.40W)
Dimensions	Ø345 x H360mm
Suspension	3000mm white cable
Canopy size	Ø100mm
Carton QTY	1/1




Canasta Interior Pendant Lights





CANASTA1 - Small
CANASTA2 - Lagre

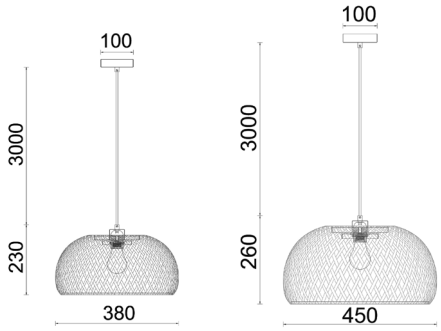

- Interior bamboo finish pendant lights
- Material: bamboo
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CANASTA1, CANASTA2**
Description	Pendant ES 40W Small/ Large Natural Bamboo Finish
Material	Bamboo
Lamp holder	1xE27 (Max.40W)
Dimensions	CANASTA1: Ø380 x H230mm CANASTA2: Ø450 x H260mm
Suspension	3000mm white cable
Canopy size	Ø100mm
Carton QTY	1/1



Cesta Interior Pendant Lights





CESTA1



- Interior cylinder brown/natural bamboo cage pendant light
- Material: bamboo
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	CESTA1
Description	PENDANT ES 40W Cylinder Natural /Brown Bamboo Cage With Black Highlight & Cable
Material	Bamboo
Lamp holder	1xE27 (Max.40W)
Dimensions	Ø250 x H360mm
Suspension	3000mm black cable
Canopy size	Ø100mm
Carton QTY	1/1

Botanica Interior Pendant Lights






BOTANICA01
(White)



BOTANICA02
(Black)



BOTANICA03A
(Coffee)

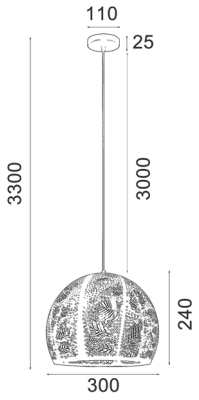

- Interior iron dome perforated (Leaves) pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**BOTANICA01, BOTANICA02, BOTANICA03A**
Description	PENDANT ES 72W Dome Perforated (Leaves)
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø300 x H240mm
Suspension	3000mm PVC cable
Canopy Size	Ø110 x 25mm
Carton QTY	1/1



Origami Interior Pendant Lights






ORIGAMI1 - Small
ORIGAMI4 - Large
(White & White Interior)




ORIGAMI2 - Small
ORIGAMI5 - Large
(Rose Gold & Gold Interior)



ORIGAMI3 - Small
ORIGAMI6 - Large
(Matte Grey & Gold Interior)





- Interior iron wine glass triangular tiled pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ORIGAMI1-6**
Description	PENDANT ES 72W SML/ LRG Wine Glass Triangular Tiled Iron
Material	Iron
Lamp holder	1xE27 (Max.72W)
Dimensions	ORIGAMI1-3: Ø220 x H215mm ORIGAMI4-6: Ø320 x H295mm
Suspension	3000mm PVC cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1



Tuile Interior Pendant Lights






TUILE1 -Small
TUILE4 - Large
(Matte Black)




TUILE2 - Small
TUILE5 - Large
(Champagne Gold)



TUILE3 - Small
TUILE6 - Large
(Coffee)



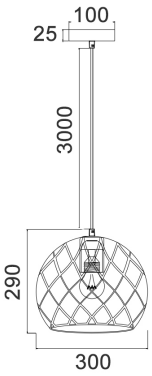

- Interior iron wine glass perforated(Diamond) tiles pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**TUILE1-6**
Description	PENDANT ES 72W Wine Glass Perforated (Diamond) Tiles
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	TUILE1-3: Ø200 x H200mm TUILE4-6: Ø300 x H290mm
Suspension	3000mm PVC black cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Marrakesh Interior Pendant Lights





MARRAKESH01
(Margarita Glass Shape)



MARRAKESH02
(Tear Drop Shape)




MARRAKESH03A
(Dome Shape)



MARRAKESH04
(Margarita Glass Shape)



MARRAKESH05
(Bottle Shape)





- Interior black iron pendant lights
- Material: iron
- Shade interior colour: gold
- Globe not included
- For indoor use only


E27


1YEAR Replacement Warranty

Part No.	**MARRAKESH01-05**
Description	PENDANT ES 72W Perforated (Morrocan) Black with Gold Interior
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	MARRAKESH01: Ø300 x H390mm MARRAKESH02: Ø300 x H280mm MARRAKESH03A: Ø400 x H200mm MARRAKESH04: Ø250 x H175mm MARRAKESH05: Ø160 x H510mm
Suspension	3000mm PVC black cable
Canopy Size	Ø110 x 25mm
Carton QTY	1/1









*Product images have a warm white light source 'on'







MARRAKESH06
(Margarita Glass Shape)



MARRAKESH07
(Tear Drop Shape)




MARRAKESH08
(Dome Shape)



MARRAKESH09
(Margarita Glass Shape)







MARRAKESH10
(Bottle Shape)


- Interior white iron pendant lights
- Material: iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**MARRAKESH06-10**
Description	PENDANT ES 72W Perforated (Morrocan) White
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	MARRAKESH06: Ø300 x H390mm MARRAKESH07: Ø300 x H280mm MARRAKESH08: Ø400 x H200mm MARRAKESH09: Ø250 x H175mm MARRAKESH10: Ø160 x H510mm
Suspension	3000mm PVC white cable
Canopy Size	Ø110 x 25mm
Carton QTY	1/1










Pesini Interior Pendant Lights







PESINI1
(Clear Glass/Antique Brass Highlight/Black Canopy)



PESINI4
(Clear Glass/Chrome Highlight/Chrome Canopy)



PESINI2
(Smokey Black Glass/Antique Brass Highlight/Black Canopy)



PESINI5
(Smokey Black Glass/Chrome Highlight/Chrome Canopy)



PESINI3
(Amber Glass/Antique Brass Highlight/Black Canopy)



PESINI6
(Amber Glass/Chrome Highlight/Chrome Canopy)

- Interior glass with antique brass / chrome highlight pendant lights
- Material: iron & glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**PESINI1-6**
Description	PENDANT ES 72W Wine Glass With Antique Brass / Chrome Highlight
Material	Iron & glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø250 x H290mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Pesini interior wall lights are also available

Patera Interior Pendant Lights






PATERA1
(Clear Glass)



PATERA2
(Smokey Black Glass)



PATERA3
(Amber Glass)



- Interior glass with extended bronze highlight pendant lights
- Material: iron & glass
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**PATERA1, PATERA2, PATERA3**
Description	PENDANT ES 72W Wine Glass With Extended Bronze Highlight
Material	Iron & glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø300 x H380mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Jerez Interior Pendant Lights



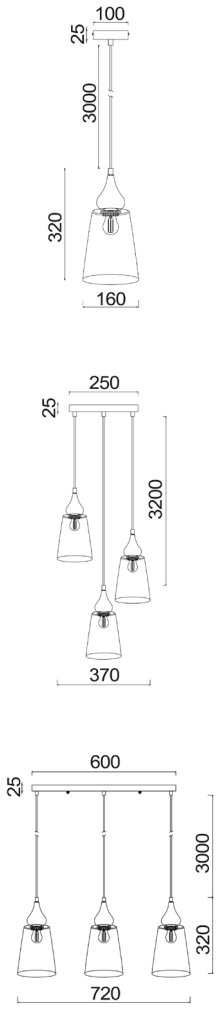



JEREZ1
(Amber Glass)



JEREZ2
(Smokey Black Glass)



JEREZ1X3R
(Amber Glass)



JEREZ2X3R
(Smokey Black Glass)

- Interior glass flat top cone pendant lights
- Material: iron & glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty



JEREZ1X3S
(Amber Glass)




JEREZ2X3S
(Smokey Black Glass)

Part No.	**JEREZ1, JEREZ1X3R, JEREZ1X3S** **JEREZ2, JEREZ2X3R, JEREZ2X3S**
Description	PENDANT ES 72W Glass Flat Top Cone
Material	Iron & glass
Lamp Holder	JEREZ1, JEREZ2: 1xE27 (Max.72W) JEREZ1X3R, JEREZ2X3R: 3xE27 (Max.72W) JEREZ1X3S, JEREZ2X3S: 3xE27 (Max.72W)
Dimensions	JEREZ1, JEREZ2: Ø160 x H320mm JEREZ1X3R, JEREZ2X3R: Ø370mm JEREZ1X3S, JEREZ2X3S: L720 x H320mm
Suspension	3000mm PVC cable
Canopy Size	JEREZ1, JEREZ2: Ø100 x 25mm JEREZ1X3R, JEREZ2X3R: Ø250 x 25mm JEREZ1X3S, JEREZ2X3S: L600 x 25mm
Carton QTY	1/1



ART BOOK

Champan Interior Pendant Lights











CHAMPAN1
(Amber Glass)



CHAMPAN2
(Smokey Black Glass)



CHAMPAN1X3R
(Amber Glass)



CHAMPAN2X3R
(Smokey Black Glass)

- Interior glass wine glass pendant lights
- Material: iron & glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**CHAMPAN1, CHAMPAN1X3R, CHAMPAN1X3S CHAMPAN2, CHAMPAN2X3R, CHAMPAN2X3S**
Description	PENDANT ES 72W Wine Glass
Material	Iron & glass
Lamp Holder	CHAMPAN1, CHAMPAN2: 1xE27 (Max.72W) CHAMPAN1X3R, CHAMPAN2X3R: 3xE27 (Max.72W) CHAMPAN1X3S, CHAMPAN2X3S: 3xE27 (Max.72W)
Dimensions	CHAMPAN1, CHAMPAN2: Ø145 x H215mm CHAMPAN1X3R, CHAMPAN2X3R: Ø355mm CHAMPAN1X3S, CHAMPAN2X3S: L625 x H215mm
Suspension	3000mm black cable
Canopy Size	CHAMPAN1, CHAMPAN2: Ø100 x 25mm CHAMPAN1X3R, CHAMPAN2X3R: Ø250 x 25mm CHAMPAN1X3S, CHAMPAN2X3S: L530 x 25mm
Carton QTY	1/1



CHAMPAN1X3S
(Amber Glass)





CHAMPAN2X3S
(Smokey Black Glass)




Trattino Interior Pendant Lights











TRATTINO1
(Amber Glass)



TRATTINO2
(Smokey Black Glass)



TRATTINO1X3R
(Amber Glass)



TRATTINO2X3R
(Smokey Black Glass)

- Interior sphere glass pendant lights
- Material: iron & glass
- Globe not included
- Globe size restriction: Ø42xL102mm
- Recommended globes: CLA candle/ fancy round globes
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	TRATTINO1, TRATTINO1X3R, TRATTINO1X3S TRATTINO2, TRATTINO2X3R, TRATTINO2X3S
Description	PENDANT ES 72W Glass Sphere
Material	Iron & glass
Lamp Holder	TRATTINO1, TRATTINO2: 1xE27 (Max.72W) TRATTINO1X3R, TRATTINO2X3R: 3xE27 (Max.72W) TRATTINO1X3S, TRATTINO2X3S: 3xE27 (Max.72W)
Dimensions	TRATTINO1, TRATTINO2: Ø150 x H360mm TRATTINO1X3R, TRATTINO2X3R: Ø350mm TRATTINO1X3S, TRATTINO2X3S: L640 x H360mm
Suspension	3000mm PVC cable
Canopy Size	TRATTINO1, TRATTINO2: Ø100 x 25mm TRATTINO1X3R, TRATTINO2X3R: Ø250 x 25mm TRATTINO1X3S, TRATTINO2X3S: L530 x 25mm
Carton QTY	1/1



TRATTINO1X3S
(Amber Glass)



TRATTINO2X3S
(Smokey Black Glass)









Tulip Interior Pendant Lights











TULIP1
(Amber Glass)



TULIP2
(Smokey Black Glass)



TULIP1X3R
(Amber Glass)



TULIP2X3R
(Smokey Black Glass)

- Interior wine glass ribbed pendant lights
- Material: iron & glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**TULIP1, TULIP1X3R, TULIP1X3S** **TULIP2, TULIP2X3R, TULIP2X3S**
Description	PENDANT ES 72W Wine Glass Ribbed With Brass Highlight
Material	Iron & glass
Lamp Holder	TULIP1, TULIP2: 1xE27 (Max.72W) TULIP1X3R, TULIP2X3R: 3xE27 (Max.72W) TULIP1X3S, TULIP2X3S: 3xE27 (Max.72W)
Dimensions	TULIP1, TULIP2: Ø200 x H270mm TULIP1X3R, TULIP2X3R: Ø455mm TULIP1X3S, TULIP2X3S: L650 x H270mm
Suspension	3000mm black cable
Canopy Size	TULIP1, TULIP2: Ø100 x 25mm TULIP1X3R, TULIP2X3R: Ø300 x 25mm TULIP1X3S, TULIP2X3S: L650 x 25mm
Carton QTY	1/1



TULIP1X3S
(Amber Glass)



TULIP2X3S
(Smokey Black Glass)



Espejo Interior Pendant Lights





ESPEJO1
(Chrome glass with line effect)



ESPEJO2
(Rose gold glass with line effect)



ESPEJO1X3R
(Chrome glass with line effect)



ESPEJO2X3R
(Rose gold glass with line effect)

- Interior line effect cylinder pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty





ESPEJO1X3S
(Chrome glass with line effect)




ESPEJO2X3S
(Rose gold glass with line effect)

Part No.	**ESPEJO1, ESPEJO1X3R, ESPEJO1X3S** **ESPEJO2, ESPEJO2X3R, ESPEJO2X3S**
Description	PENDANT ES 72W Glass With Line Effect Cylinder
Material	Iron & glass
Lamp Holder	ESPEJO1, ESPEJO2: 1xE27 (Max.72W) ESPEJO1X3R, ESPEJO2X3R: 3xE27 (Max.72W) ESPEJO1X3S, ESPEJO2X3S: 3xE27 (Max.72W)
Dimensions	ESPEJO1, ESPEJO2: Ø120 x H325mm ESPEJO1X3R, ESPEJO2X3R: Ø330mm ESPEJO1X3S, ESPEJO2X3S: L600 x H325mm
Suspension	3000mm PVC cable
Canopy Size	ESPEJO1, ESPEJO2: Ø100 x 25mm ESPEJO1X3R, ESPEJO2X3R: Ø250 x 25mm ESPEJO1X3S, ESPEJO2X3S: L530 x 25mm
Carton QTY	1/1













ESPEJO3
(Chrome glass with dotted effect)



ESPEJO4
(Rose gold glass with dotted effect)



ESPEJO3X3R
(Chrome glass with dotted effect)



ESPEJO4X3R
(Rose gold glass with dotted effect)



ESPEJO3X3S
(Chrome glass with dotted effect)





ESPEJO4X3S
(Rose gold glass with dotted effect)


- Interior dotted effect cylinder pendant lights
- Material: glass & iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**ESPEJO3, ESPEJO3X3R, ESPEJO3X3S** **ESPEJO4, ESPEJO4X3R, ESPEJO4X3S**
Description	PENDANT ES 72W Glass With Line Effect Cylinder
Material	Iron & glass
Lamp Holder	ESPEJO3, ESPEJO4: 1xE27 (Max.72W) ESPEJO3X3R, ESPEJO4X3R: 3xE27 (Max.72W) ESPEJO3X3S, ESPEJO4X3S: 3xE27 (Max.72W)
Dimensions	ESPEJO3, ESPEJO4: Ø120 x H325mm ESPEJO3X3R, ESPEJO4X3R: Ø330mm ESPEJO3X3S, ESPEJO4X3S: L600 x H325mm
Suspension	3000mm PVC cable
Canopy Size	ESPEJO3, ESPEJO4: Ø100 x 25mm ESPEJO3X3R, ESPEJO4X3R: Ø250 x 25mm ESPEJO3X3S, ESPEJO4X3S: L530 x 25mm
Carton QTY	1/1








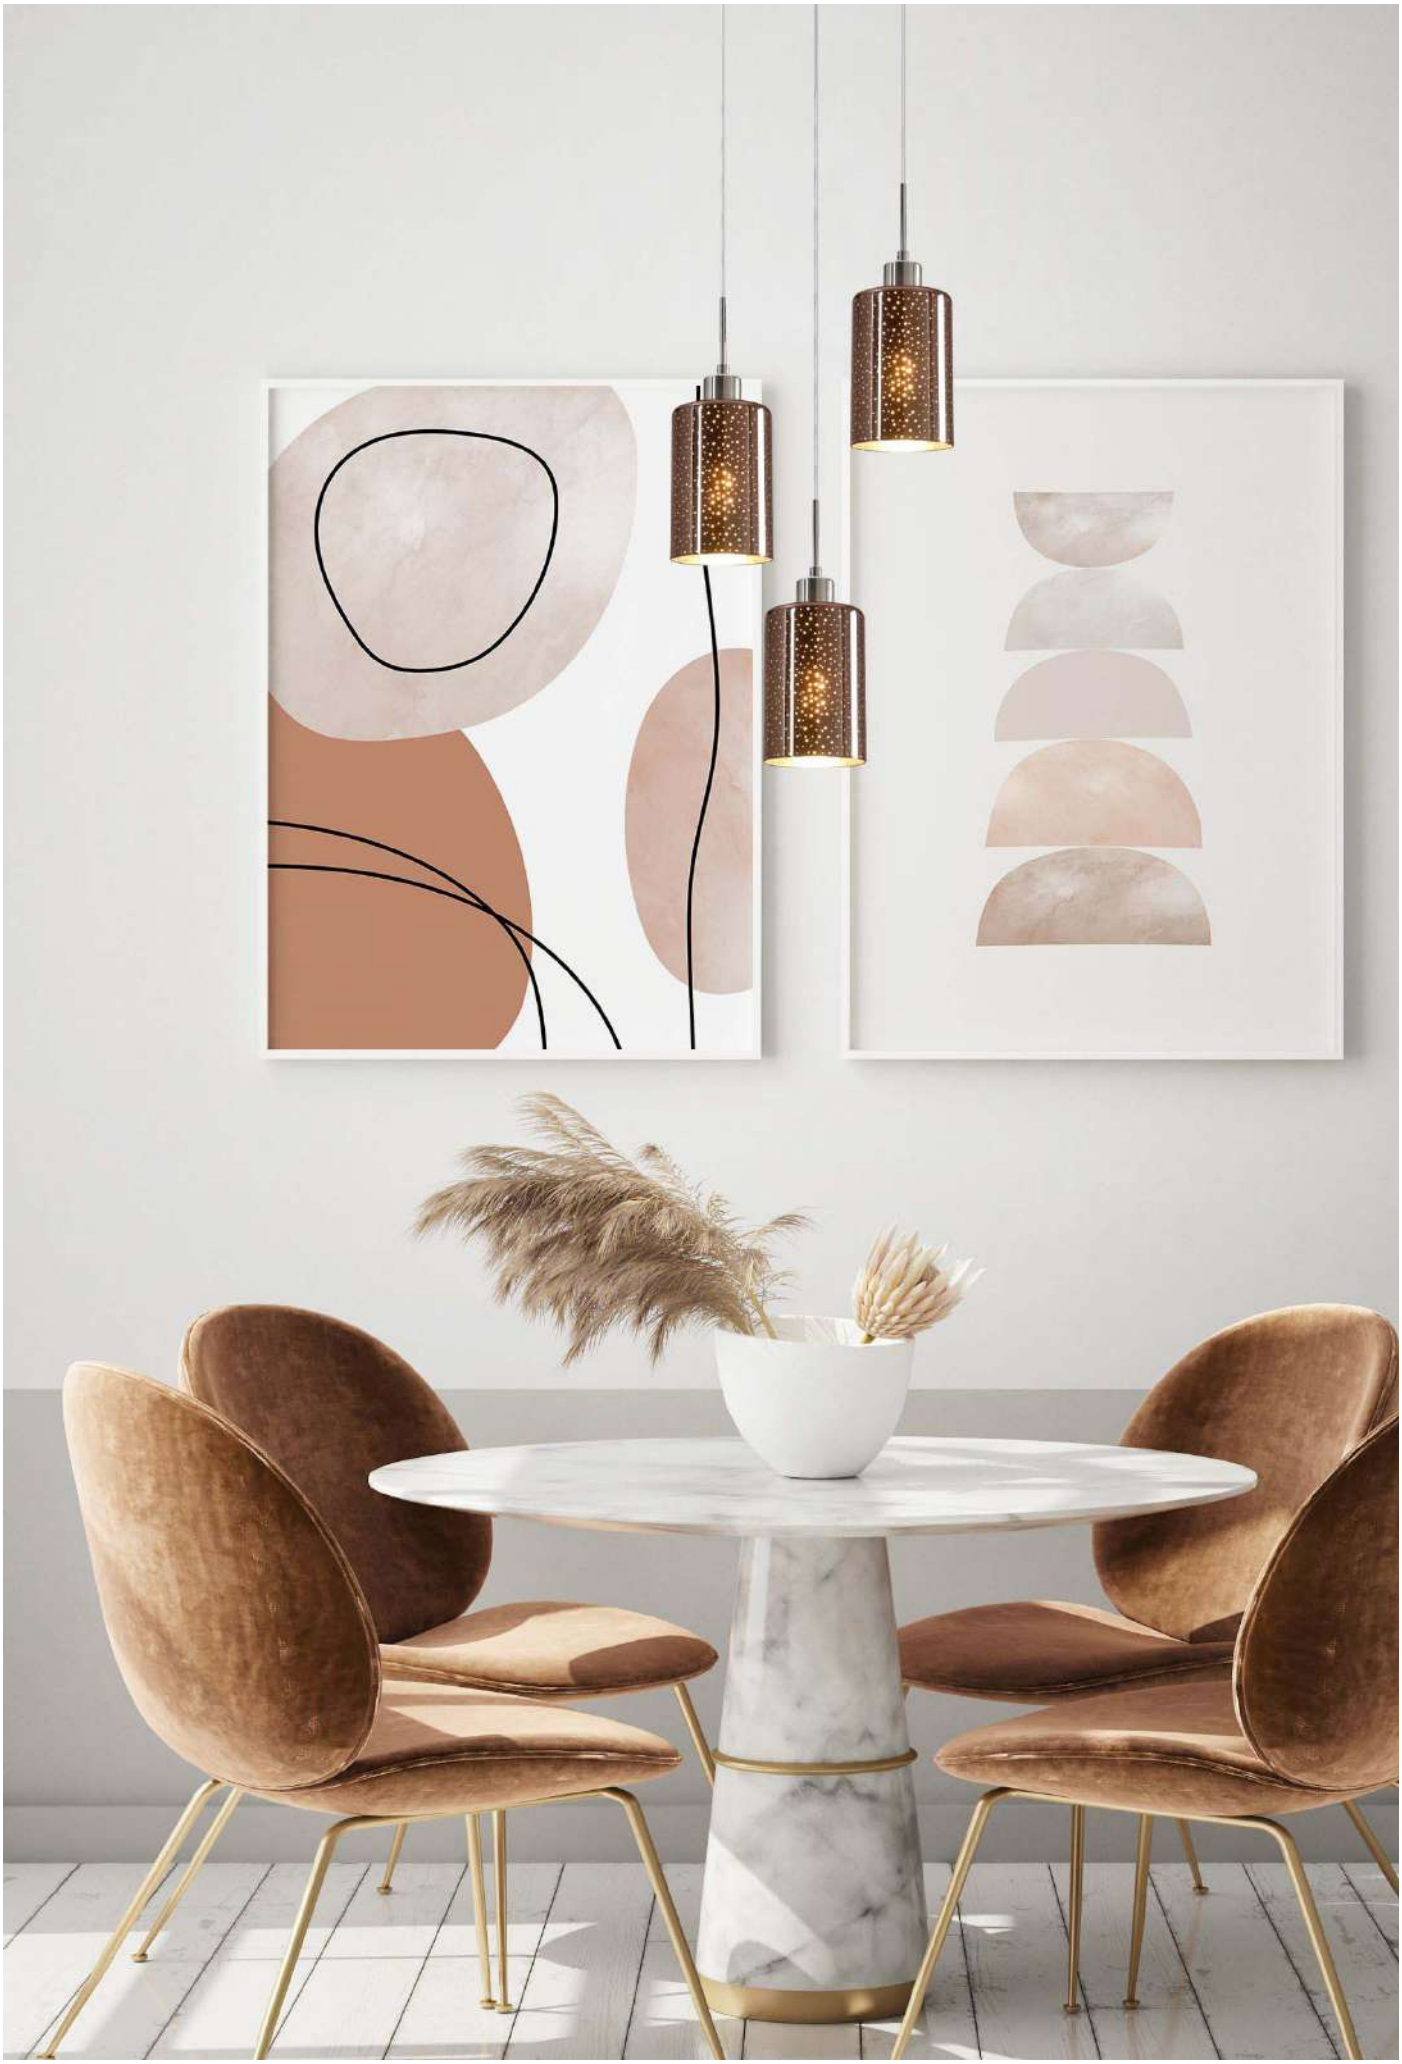

Ciotola Interior Pendant Lights





ROD TILT ANGLE MAX.30^0



CIOTOLA1 - Small
CIOTOLA3 - Medium
CIOTOLA5 - Large
(Matte Black)





CIOTOLA2 - Small
CIOTOLA4 - Medium
CIOTOLA6 - Large
(Antique Brass)


- Interior cone(Concave) tipped opal glass pendant lights
- Material: opal glass & iron
- Globe not included
- Globe size restrictions (max. diameter):
  CIOTOLA1-2: 40mm; CIOTOLA3-4: 50mm;
  CIOTOLA5-6: 70mm
- Rod tilt angle: max.30^0
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**CIOTOLA1-6**
Description	PENDANT ES 40W Cone(Concave)Tipped Opal Glass
Material	Glass & iron
Lamp Holder	1xE27 (Max.40W)
Dimensions	CIOTOLA1-2: Ø220 x H215mm CIOTOLA3-4: Ø280 x H265mm CIOTOLA5-6: Ø350 x H340mm
Suspension	3x200mm + 2x300mm rods (Note: rods can be removed to reach desired length)
Canopy Size	Ø100 x 25mm
Carton QTY	1/1












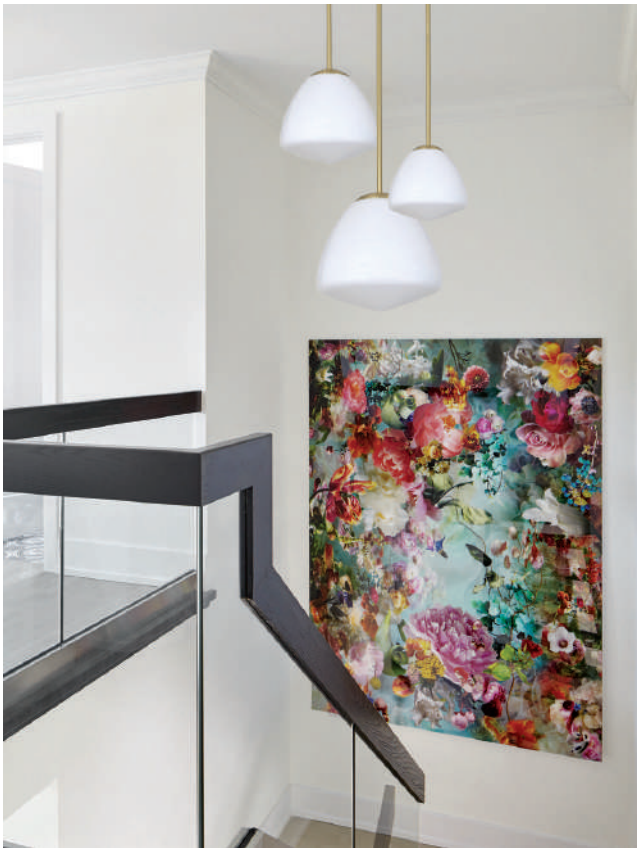

Vinum Interior Pendant Lights





VINUM1
(Chrome Glass)



VINUM2
(Copper Coloured Glass)

- Interior wine glass shape with chrome highlight pendant lights
- Material: glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**VINUM1, VINUM2**
Description	PENDANT ES 72W Wine Glass With Chrome Highlight
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø140 x H240mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1




Vinum interior wall lights are also available



Roche Interior Pendant Lights



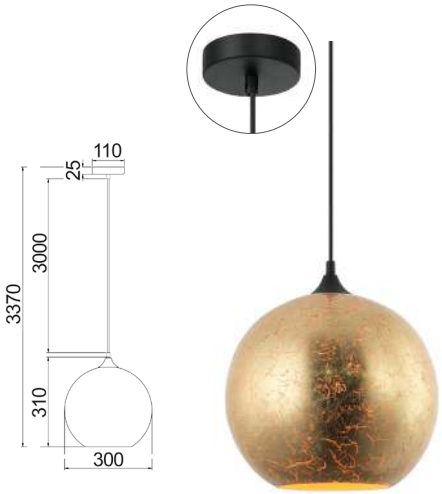

ROCHE1
(Crackled Matte Gold)



ROCHE2
(Crackled Satin Chrome)

- Interior wine glass shape pendant lights
- Material: glass
- Shade interior colour: white
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ROCHE1, ROCHE2**
Description	PENDANT ES 72W Wine Glass With White Interior
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø300 x H310mm
Suspension	3000mm black cable
Canopy Size	Ø110 x 25mm
Carton QTY	1/1


***Product images have a warm white light source 'on'**



Ida Interior Pendant Lights







IDA1
(Matte Black/
Blonde Wood)



IDA2
(Matte White/
Blonde Wood)




- Interior cylinder pendant lights
- Material: iron & blonde wood
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**IDA1, IDA2**
Description	PENDANT ES 72W Iron with Blonde Wood Cylinder
Material	Iron & wood
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø50 x H250mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/10

Golda Interior Pendant Lights







GOLDA1
(Matte Black/ Diagonal Antique Brass Feature)



GOLDA2
(Matte Black/ Vertical Antique Brass Feature)

- Interior cylinder pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**GOLDA1, GOLDA2**
Description	PENDANT ES 72W Matte Black Diagonal/ Vertical Antique Brass Feature Cylinder
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø50 x H250mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/10





Mikro Interior Pendant Lights





MIKRO1
(Matte Black Cylinder & Brass Mesh)

MIKRO2
(Antique Brass Cylinder & Chrome Mesh)






- Interior cylinder & mesh pendant lights
- Material: iron
- Globe not included
- For indoor use only

E14 | 1 YEAR Replacement Warranty

Part No.	**MIKRO1, MIKRO2**
Description	PENDANT SES Cylinder & Mesh
Material	Iron
Lamp Holder	1xE14 (Max.40W)
Dimensions	Ø75 x H250mm
Suspension	3000mm PVC black cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1


Corazon Interior Pendant Lights



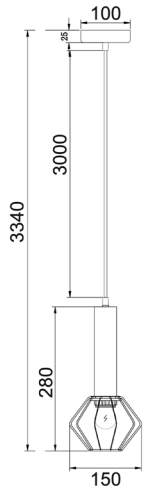



CORAZON1
(Matte Black/ Copper Diamond Wire)

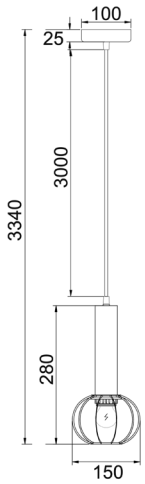



CORAZON2
(Antique Brass/ Matte Black Sphere Wire)

- Interior diamond / sphere wire pendant lights
- Material: iron
- Globe not included
- Globe size restrictions (max.diameter): 60mm(GLS)
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**CORAZON1, CORAZON2**
Description	CORAZON1: PENDANT ES 72W Matt black Copper Diamond Wire CORAZOR2: PENDANT ES 72W Antique Brass Matt Black Sphere Wire
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø150 x H280mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/10



Vaina Interior Pendant Lights







VAINA1
(Matte Black)



VAINA2
(Matte White)



VAINA3
(Matte Gold)



VAINA4
(Antique Copper)

- Interior wine glass with three petals pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty


Part No.	**VAINA1-4**
Description	PENDANT ES 72W Wine Glass with Three Petals
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø150 x H155mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Bella Interior Pendant Lights



*Product images have a warm white light source 'on'; Shade interior colour: matte gold

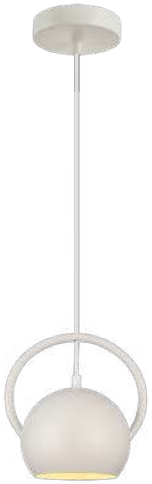


BELLA1
(Matte white)



BELLA2
(Matte Black)



BELLA3
(Matte Gold)



- Interior wine glass iron pendant lights
- Material: iron
- Shade interior colour: matte gold
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**BELLA1-3**
Description	PENDANT ES 72W Wine Glass with Matte Gold Interior
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø200 x H205mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Cleo Interior Pendant Lights







CLEO1
(Cut Glass)

- Interior cylinder clear embossed glass pendant light
- Material: iron & glass
- Globe not included
- Globe size restriction: only candle shaped globes will fit
- For indoor use only


E14 | 1 YEAR Replacement Warranty

Part No.	**CLEO1**
Description	PENDANT SES 72W Cylinder Clear Embossed Glass with Matt Black & Brass Highlight
Material	Iron & glass
Lamp Holder	1xE14 (Max.72W)
Dimensions	Ø90 x H360mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Pastille Interior Pendant Lights







PASTILLE1
(Smokey Glass & Satin Chrome Highlight)



PASTILLE2
(Amber Glass & Antique Brass Highlight)

- Interior cylinder pendant lights
- Material: iron & glass
- Globe not included
- Globe size restriction (max.diameter): 60mm
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**PASTILLE1, PASTILLE2**
Description	PENDANT ES 72W Cylinder with Highlight
Material	Iron & glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø80 x H300mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Papillon Interior Pendant Lights



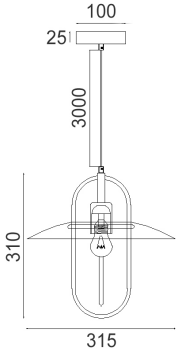



PAPILLON1
(Matte Black & Clear Glass)



PAPILLON2
(Antique Brass & Amber Glass)

- Interior coolie with oval glass pendant lights
- Material: iron & glass
- Globe not included
- Globe size restriction (max diameter): 95mm(G95)
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**PAPILLON1, PAPILLON2**
Description	PENDANT ES 72W Coolie with Oval Glass
Material	Iron & glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø315 x H310mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Chapeau Interior Pendant Lights







CHAPEAU1 - Small
CHAPEAU3 - Large
(Smokey Glass/ Satin Chrome Highlight)



CHAPEAU2 - Small
CHAPEAU4 - Large
(Amber Glass/ Antique Brass Highlight)

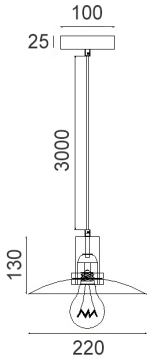

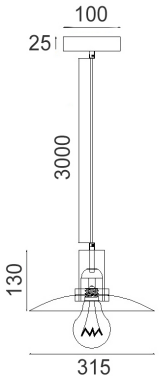

- Interior glass coolie pendant lights
- Material: iron & glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**CHAPEAU1-4**
Description	PENDANT ES 72W Glass Coolie with Highlight
Material	Iron & glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	CHAPEAU1-2: Ø220 x H130mm CHAPEAU3-4: Ø315 x H130mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Hexade Interior Pendant Lights






HEXADE1
(Matte Black)



HEXADE2
(Matte Gold)



- Interior candelabra pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**HEXADE1, HEXADE2**
Description	PENDANT ES x 16 72W Candelabra
Material	Iron
Lamp Holder	16xE27 (Max.72W)
Dimensions	Ø505 x H460mm
Suspension	500mm rod
Canopy Size	Ø120 x 25mm
Carton QTY	1/1



Hexa Interior Pendant Lights






HEXA1
(Matte Black)



HEXA2
(Matte Gold)



- Interior candelabra pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**HEXA1, HEXA2**
Description	PENDANT ES x 6 72W Candelabra
Material	Iron
Lamp Holder	6xE27 (Max.72W)
Dimensions	Ø420mm
Suspension	300mm rod
Canopy Size	Ø120 x 25mm
Carton QTY	1/1



Abbey Interior Pendant Lights






ABBEY1
(Matte Black)



ABBEY2
(Matte Gold)



- Interior candelabra pendant lights
- Material: iron & opal glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ABBEY1, ABBEY2**
Description	PENDANT ES x 6 72W Candelabra
Material	Iron, opal glass
Lamp Holder	6xE27 (Max.72W)
Dimensions	Ø675 x H250mm
Suspension	300mm rod
Canopy Size	Ø110 x 25mm
Carton QTY	1/1



Escama Interior Pendant Lights





ESCAMA1
(Black)



ESCAMA2
(White)

- Interior iron ellipse perforated (triangles) pendant lights
- Material: iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**ESCAMA1, ESCAMA2**
Description	PENDANT ES 72W Iron Ellipse Perforated (Triangles)
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø140 x H225mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Contour Interior Pendant Lights



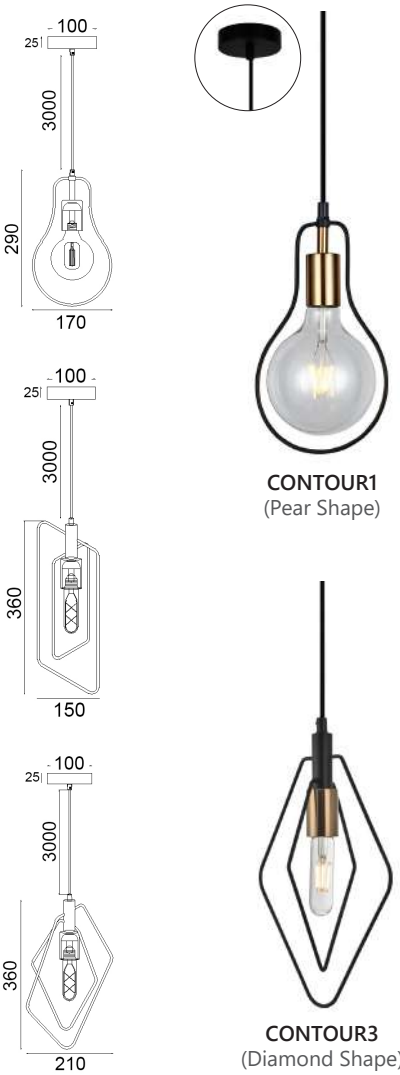

CONTOUR1
(Pear Shape)



CONTOUR2
(Rectangular Shape)

CONTOUR3
(Diamond Shape)

- Interior black wire pendant lights
- Material: iron
- Globe not included
- Globe size restrictions (max.diameter): CONTOUR1: 125mm (G125); CONTOUR2: 57mm (ST57); CONTOUR3: 95mm (G95)
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CONTOUR1, CONTOUR2, CONTOUR3**
Description	PENDANT ES 72W BLK WIRE with Antique Brass Highlight
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	CONTOUR1: W170 x H290mm CONTOUR2: W150 x H360mm CONTOUR3: W210 x H360mm
Suspension	3000mm PVC cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/10



Khaleesi Interior Pendant Lights








KHALEESI1
(1xE27)

KHALEESI2
(3xE27)

KHALEESI3
(5xE27)





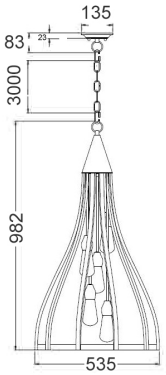

- Interior dark red oak wood bell pendant lights
- Material: oak dark red wood with oiled bronze hardware
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**KHALEESI1, KHALEESI2, KHALEESI3**
Description	PENDANT Oak Dark Red Wood Small / Medium/ Large Bell + Round Stepped Oiled Bronze Canopy
Material	Iron & wood
Lamp Holder	KHALEESI1: 1XE27 (Max.60W) KHALEESI2: 3XE27 (Max.60W) KHALEESI3: 5xE27 (Max.60W)
Dimensions	KHALEESI1: Ø226 x H462mm KHALEESI2: Ø391 x H711mm KHALEESI3: Ø535 x H982mm
Suspension	3000mm chain & cable
Canopy Size	Ø135x23mm
Carton QTY	1/1



Bonito Interior Pendant Lights



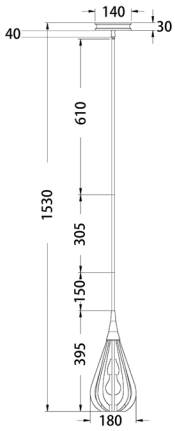




NOTE:
Adjustable knuckle(45^0). Suitable for raked ceiling.



BONITO1
(Taupe Wood)



BONITO6
(Winter Moss Wood)

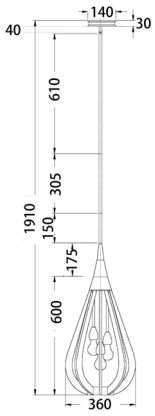




BONITO2
(Taupe Wood)



BONITO7
(Winter Moss Wood)

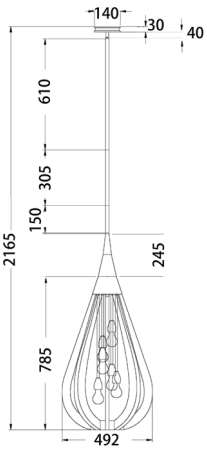

- Interior tear drop wood pendant lights
- Material: nickel & taupe / winter moss finished wood
- Globe not included
- For indoor use only





BONITO3
(Taupe Wood)




BONITO8
(Winter Moss Wood)


Part No.	**BONITO1-3 & BONITO6-8**
Description	PENDANT ES Wood SML/ MED/ LGE Tear Drop w/Nickel + Rods
Material	Nickel & wood
Lamp Holder	BONITO1&6: 1xE27 (Max.60W) BONITO2&7: 3xE27 (Max.60W) BONITO3&8: 6xE27 (Max.60W)
Dimensions	BONITO1&6: Ø180 x H395mm BONITO2&7: Ø360 x H775mm BONITO3&8: Ø492 x H1030mm
Suspension	150+3305+610mm rods (Can be mounted with any combination of short and long rods)
Canopy Size	Ø140x30mm
Carton QTY	1/1




Senorita Interior Pendant Lights











SENORITA1
(Tuscan Coffee Cherry Wood)



SENORITA4
(Winter Moss Wood)



SENORITA2
(Tuscan Coffee Cherry Wood)



SENORITA5
(Winter Moss Wood)



SENORITA3
(Tuscan Coffee Cherry Wood)



SENORITA6
(Winter Moss Wood)

- Interior wood arrow shape pendant lights
- Shade: ashtree / cherry wood
- Colour: Tuscan coffee/ Winter moss
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**SENORITA1-6**
Description	PENDANT ES Wood SML/ MED/ LGE Arrow + RND Stepped Oiled Brz / Polished Nickel Canopy
Material	Wood
Lamp Holder	SENORITA1&4: 1xE27 (Max.60W) SENORITA2&5: 3xE27 (Max.60W) SENORITA3&6: 6xE27 (Max.60W)
Dimensions	SENORITA1&4: Ø248 x H442mm SENORITA2&5: Ø420 x H790mm SENORITA3&6: Ø588 x H1087mm
Suspension	3000mm chain & cable
Canopy Size	Ø135x23mm
Carton QTY	1/1

***Some assembly MAY BE required**



Meti Interior Pendant Lights




METI01



METI02



METI interior wall light is also available

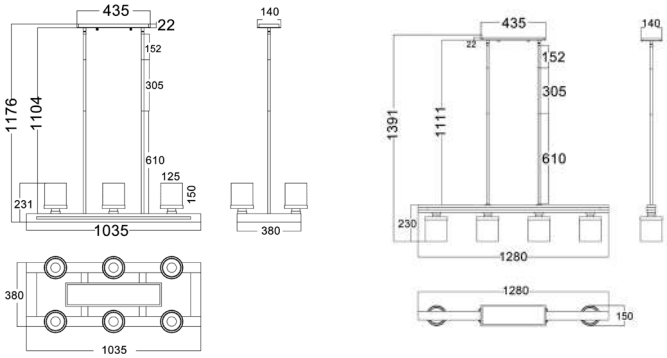

- Interior rectangular / bar pendant lights
- Material: iron, wood & glass
- Oil rubbed bronze rods+trim+mounted plates
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**METI01, METI02**
Description	PENDANT ES 60W Warm Chestnut Wood Frame Rect / Bar Clear Glass Shades Oil Rubbed Bronze Hardware
Material	Iron, wood & glass
Lamp Holder	METI01: 6xE27 (Max.60W) METI02: 4xE27 (Max.60W)
Dimensions	METI01: L1035 x W380mm METI02: L1280 x W150mm
Suspension	METI01: Rod, see line drawing (Min: 305mm; Max: 1067mm) METI02: Rod, see line drawing (Any combination of rods can be used)
Canopy Size	L435 x W140 x D22mm
Carton QTY	1/1



Autumn Interior Pendant Lights






Note:
(1) Adjustable knuckle. Suitable for raked ceiling.
(2) Can be mounted with the shortest rod only or any combination of short and long rods




AUTUMN01
(Small)



AUTUMN02
(Large)



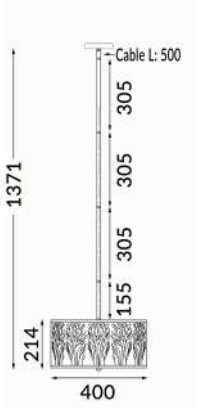

- Interior drum perforated (trees) aged bronze pendant lights
- Shade: iron with aged bronze finish & PC
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty





AUTUMN interior wall light and table lamp are also available.

Part No.	**AUTUMN01, AUTUMN02**
Description	AUTUMN01: PENDANT Small Round Aged Bronze with Amber Lining with Amber Interior +Round Aged Bronze Canopy AUTUMN02: PENDANT Large Round Aged Bronze with Amber Lining Frosted Glass Diffuser with Amber Interior + Rod + Round Aged Bronze Canopy
Material	AUTUMN01: Iron & PC AUTUMN02: Iron, PC & glass
Lamp Holder	AUTUMN01: 1xE27 (Max.60W) AUTUMN02: 3xE27 (Max.60W)
Dimensions	AUTUMN01: Ø220 x H337mm AUTUMN02: Ø400 x H200mm
Suspension	AUTUMN01: 3000mm cable + 150.5mm rod AUTUMN02: 500mm cable + 155 + 305 + 305 + 305mm rods
Canopy Size	Ø120mm
Carton QTY	1/1



Tambura Interior Pendant Lights





TAMBURA01 - Small
(White)



TAMBURA02 - Small
(Black)



TAMBURA03 - Medium
TAMBURA05 - Large
(White)



TAMBURA04 - Medium
TAMBURA06 - Large
(Black)






***Product images have a warm white light source 'ON'.**
***TAMBURA table lamps and floor lamps are also available**

- Interior cylinder cloth shade pendant lights
- Shade: cloth shade with wood veneer trim
- Shade interior colour: white
- Globe not included
- For indoor use only



Part No.	**TAMBURA01-06**
Description	PENDANT Cylinder Cloth Shade with Blonde Wood veneer Trim + Round Canopy
Material	Cloth
Lamp Holder	1xE27 (Max.72W)
Dimensions	TAMBURA01-02: Ø150 x H250mm TAMBURA03-04: Ø300 x H200mm TAMBURA05-06: Ø400 x H250mm
Suspension	3000mm PVC cable
Canopy Size	Ø100x25mm
Carton QTY	1/1

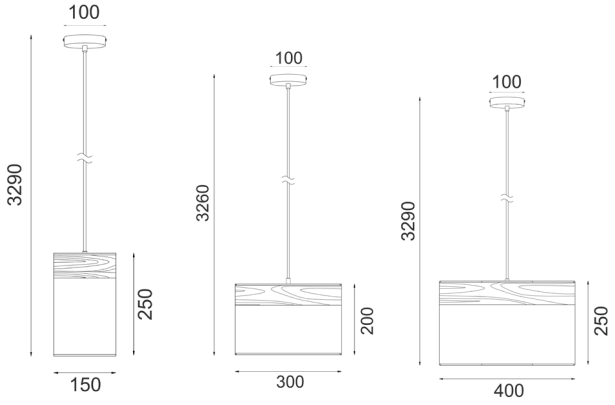

DECOR



Swing Interior Pendant Lights





SWING1
(Ellipse Matte White
Fitting & White Interior)



SWING2
(Ellipse Matte Black
Fitting & Black Interior)



SWING3
(Dome Matte White
Fitting & White Interior)



SWING4
(Dome Matte Black
Fitting & Black Interior)



SWING5
(Ellipse Matte White
Fitting & White Interior)




SWING6
(Ellipse Matte Black
Fitting & Black Interior)

- Interior iron with wood frame pendant lights
- Shade: powder coated iron and wood
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**SWING1-6**
Description	PENDANT Iron Oblong/ Dome/ Ellipse + Wood Frame
Material	Iron & wood
Lamp Holder	1xE27 (Max.72W)
Dimensions	SWING1-2: W230 x H320mm SWING3-4: W370 x H215mm SWING5-6: W230 x H320mm
Suspension	3000mm PVC cable
Canopy Size	Ø110x20mm
Carton QTY	1/1

***SWING 1, 3, 5 Product images have a warm white light source 'ON'.**

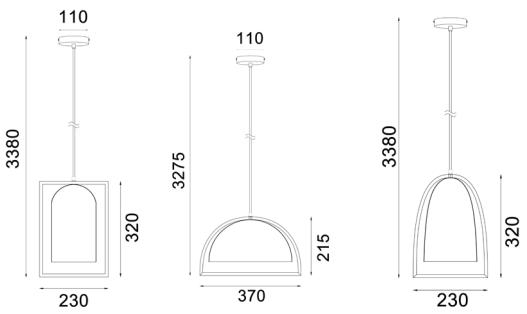



Horten Interior Pendant Lights




'Wood' part is made of iron, painted with a wood finish



HORTEN1
(Matte White Fitting & White Interior)



HORTEN2
(Matte Black Fitting & Black Interior)



- Interior oblong pendant lights
- Shade: powder coated iron **('Wood' part is made of iron, painted with a wood finish)**
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**HORTEN1, HORTEN2**
Description	PENDANT Iron Oblong with Blonde Wood + Round Canopy
Material	Powder coated iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø150 x H350mm
Suspension	3000mm cable
Canopy Size	Ø110mm
Carton QTY	1/10



Nordic Interior Pendant Lights






NORDIC1 - Small
NORDIC3 - Medium
NORDIC5 - Large
(White)



NORDIC2 - Small
NORDIC4 - Medium
NORDIC6 - Large
(Black)

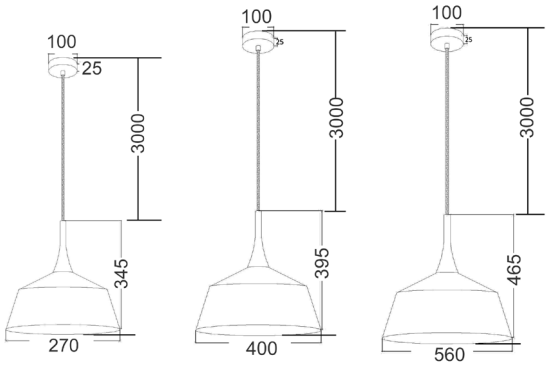

- Interior angled dome pendant lights
- Shade: iron & wood
- Shade interior colour: white
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**NORDIC1-6**
Description	PENDANT Angled Dome with Blonde Wood + Round Canopy
Material	Powder coated steel & wood
Lamp Holder	1xE27 (Max.60W)
Dimensions	NORDIC1-2: Ø270 x H345mm NORDIC3-4: Ø400 x H395mm NORDIC5-6: Ø560 x H465mm
Suspension	NORDIC1, 3 & 5: 3000mm white and black strips textile cable NORDIC2, 4 & 6: 3000mm textile cable
Canopy Size	Ø100x25mm
Carton QTY	1/1



Faro Interior Pendant Lights







FARO1
(Matte Black)



FARO2
(Matte White)



- Interior cone(convex) iron & wood pendant lights
- Shade: powder coated iron & wood
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**FARO1, FARO2**
Description	PENDANT Iron Cone (Concave) with Blonde Wood + Round Canopy
Material	Iron & wood
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø180xH330mm
Suspension	3000mm PVC cable
Canopy Size	Ø100x25mm
Carton QTY	1/10

Lanterna Interior Pendant Lights





LANTERNA1
(Matte Black)

LANTERNA2
(Matte White)

- Interior cone(square) iron wood pendant lights
- Shade: powder coated iron & wood
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**LANTERNA1, LANTERNA2**
Description	PENDANT Cone (Square) with Blonde Wood + Square Canopy
Material	Iron & wood
Lamp Holder	1xE27 (Max.72W)
Dimensions	W170xH285mm
Suspension	3000mm PVC cable
Canopy Size	100x100x25mm
Carton QTY	1/10



Zara Interior Pendant Lights





ZARA1A
(Painted Oak Wood)

ZARA2A
(Painted Burl Wood)

ZARA3A
(Satin Nickel)



ZARA4A
(Black)

ZARA5A
(White)



- Interior bell pendant lights
- Shade: powder coated steel
- Shade interior colour: white
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ZARA1A-5A**
Description	PENDANT Bell + S/Circular Nickel Canopy
Material	Steel
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø160xH345mm
Suspension	3000mm cable
Canopy Size	Ø125x45mm
Carton QTY	1/1







ZARA6A
(Painted Oak Wood)



ZARA7A
(Painted Burl Wood)




ZARA8A
(Satin Nickel)



ZARA9A
(Black)



ZARA10A
(White)

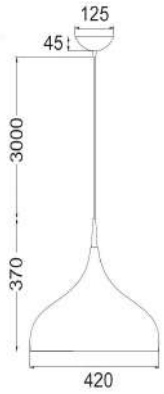

- Interior dome pendant lights
- Shade: powder coated steel
- Shade interior colour: white
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**ZARA6A-10A**
Description	PENDANT Dome + S/Circular Nickel Canopy
Material	Steel
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø420xH370mm
Suspension	3000mm cable
Canopy Size	Ø125x45mm
Carton QTY	1/1



Armis Interior Pendant Lights





ARMIS1
(Matte white)



ARMIS2
(Champagne gold)



ARMIS3
(Coffee)



ARMIS4
(Matte white)



ARMIS5
(Champagne gold)



ARMIS6
(Coffee)



ARMIS7
(Matte white)



ARMIS8
(Champagne gold)




ARMIS9
(Coffee)

- Interior iron with tiles pendant lights
- Shade: iron
- Globe not included
- For indoor use only



Part No.	**ARMIS1-9**
Description	PENDANT Iron with Tiles Wine glass/ Ellipse/ Dome
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	ARMIS1-3: Ø300xH270mm ARMIS4-6: Ø250xH255mm ARMIS7-9: Ø400xH200mm
Suspension	3000mm PVC cable
Canopy Size	ARMIS1-3: Ø110x25mm ARMIS4-6: Ø100x25mm ARMIS7-9: Ø110x25mm
Carton QTY	1/1

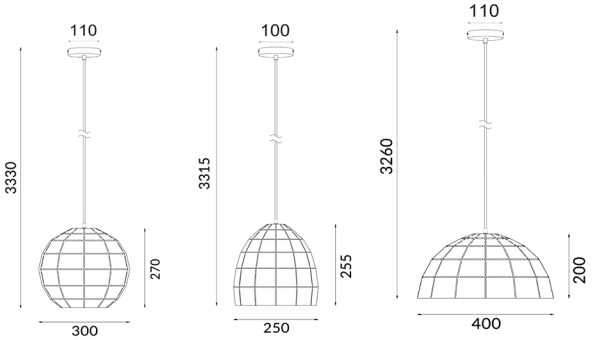








Finn Interior Pendant Lights



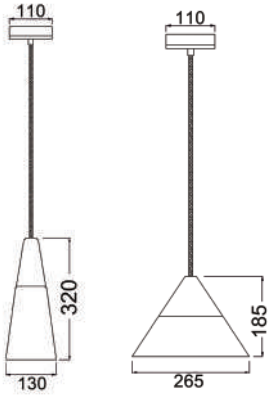



FINN1
(Long Cone)

FINN2
(Small Cone)



FINN3
(Medium Cone)

- Interior cone blonde wood opal glass pendant lights
- Shade: blonde wood & opal glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**FINN1, FINN2, FINN3**
Description	PENDANT Cone (Flat top) with Blonde Wood + Round Blonde Wood Canopy
Material	Wood & opal glass
Lamp Holder	1xE27 (Max.40W)
Dimensions	FINN1: Ø130 x H320mm FINN2: Ø265 x H185mm FINN3: Ø195 x H245mm
Suspension	3000mm black fabric wire cable
Canopy Size	Ø110x25mm
Carton QTY	FINN1: 1/4 FINN2: 1/2 FINN3: 1/4



Legna Interior Pendant Lights






LEGNA1
(Painted Natural Oak)



LEGNA3
(Painted Salem Oak)





LEGNA2
(Painted Natural Oak)



LEGNA4
(Painted Salem Oak)

***Product images have a warm white light source 'ON'.**

- Interior ellipse / dome pendant lights
- Shade: aluminium
- Shade interior colour: white
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty


Part No.	**LEGNA1-4**
Description	PENDANT Ellipse/ Dome with Grey + Round Grey Canopy
Material	Aluminium
Lamp Holder	1xE27 (Max.72W)
Dimensions	LEGNA1 & 3: Ø225xH260mm LEGNA2 & 4: Ø305xH155mm
Suspension	3000mm PVC cable
Canopy Size	Ø100x25mm
Carton QTY	1/1




Celeste Interior Pendant Lights



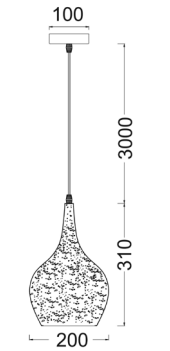

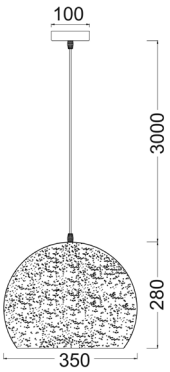





CELESTE1A
(Bell Shape)



CELESTE2A
(Dome Shape)



CELESTE3A
(Ellipse Shape)


- Interior rustic embossed pendant lights
- Shade: powder coated aluminium
- Shade interior colour: gold
- Cable: brown cloth
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**CELESTE1A, CELESTE2A, CELESTE3A**
Description	PENDANT ES 40W Bell/ Dome/ Ellipse Black Speckled with Gold Interior + Round Black Canopy
Material	Powder coated aluminium
Lamp Holder	1xE27 (Max.40W)
Dimensions	CELESTE1A: Ø200xH310mm CELESTE2A: Ø350xH280mm CELESTE3A: Ø305xH305mm
Suspension	3000mm brown cloth cable
Canopy Size	Ø100mm
Carton QTY	1/1



Modello Interior Pendant Lights

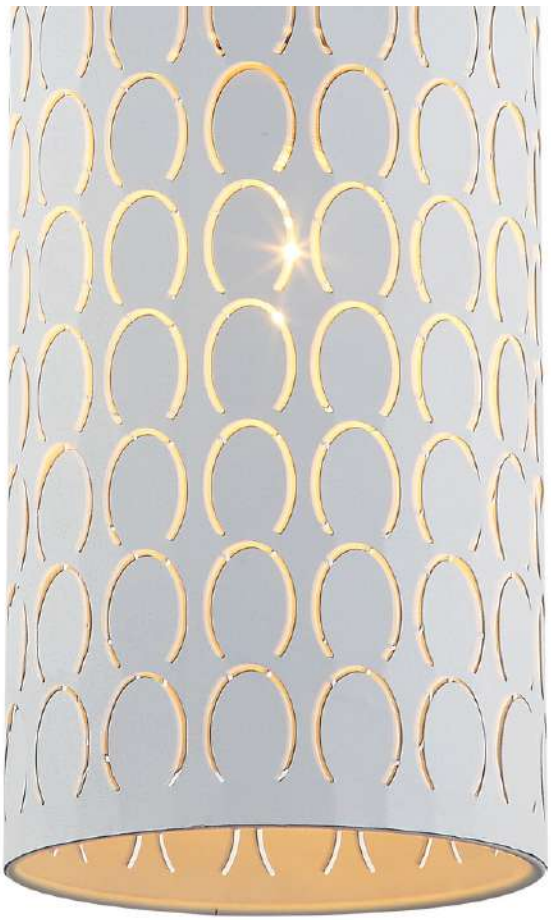





MODELLO1
(White)



MODELLO2
(Black)



- Interior cylinder perforated (horseshoes) pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**MODELLO1, MODELLO2**
Description	PENDANT Cylinder Perforated (Horseshoes) + Round Canopy
Material	Powder coated iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø130xH250mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1


Glaze Interior Pendant Lights





GLAZE1
(Red)

GLAZE2
(Green)

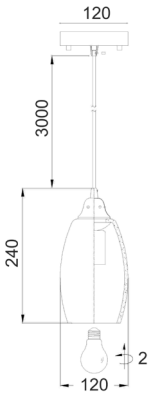



GLAZE3
(Blue)



GLAZE5
(Amber)

***Product images have a warm white light source 'ON'.**

- Interior ellipse glass(Blown) feathered pendant lights
- Shade: satin nickel hardware with glass
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**GLAZE1-3 & GLAZE5**
Description	PENDANT Ellipse Glass (Blown) Feathered + RND S/C Canopy
Material	Glass & iron
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø120xH240mm
Suspension	3000mm clear flex
Canopy Size	Ø120mm
Carton QTY	1/1





*Product images have a warm white light source 'ON'.





GLAZE10
(Dark & Light with Dark Infill)



GLAZE11
(Dark & Light with Light Infill)

- Interior stone mosaic glass pendant lights
- Shade: glass, stone & iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**GLAZE10, GLAZE11**
Description	PENDANT ES 60W Stone Mosaic Ellipse (Hand Blown Glass)
Material	Glass, stone & iron
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø136xH252mm
Suspension	3000mm cable
Canopy Size	Ø120x25mm
Carton QTY	1/1



Rictus Interior Pendant Lights








RICTUS1
(Wine Glass Shape/ Copper)



RICTUS2
(Wine Glass Shape/ Chrome)






RICTUS3
(Ellipse Shape/ Copper)



RICTUS4
(Ellipse Shape/ Chrome)





RICTUS5
(Tear Drop Shape/ Copper)



RICTUS6
(Tear Drop Shape/ Chrome)

- Interior peaked copper / chrome painted pendant lights
- Shade: glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**RICTUS1-6**
Description	PENDANT Wine Glass/ Ellipse/ Tear Drop Peaked Copper/Chrome Painted Glass +RND BLK Canopy
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	RICTUS1-2: Ø290xH250mm RICTUS3-4: Ø225xH320mm RICTUS5-6: Ø180xH380mm
Suspension	3000mm cable
Canopy Size	RICTUS1-2: Ø110X25mm RICTUS3-6: Ø100X25mm
Carton QTY	1/1



Ordito Interior Pendant Lights




*Product images have a warm white light source 'ON'.



ORDITO1
(Champagne Glass)

ORDITO2
(Black Chrome Glass)



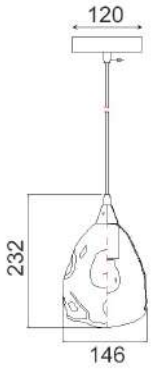

ORDITO3
(Gold Plated Glass)

- Interior glass dimpled ellipse pendant lights
- Shade: chrome metal with glass
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**ORDITO1, ORDITO2, ORDITO3**
Description	PENDANT ES 60W Glass Ellipse with Chrome Highlight + RND CH Canopy
Material	Glass, chrome metal
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø146xH232mm
Suspension	3000mm clear flex
Canopy Size	Ø120x25mm
Carton QTY	1/1



Chuva Interior Pendant Lights



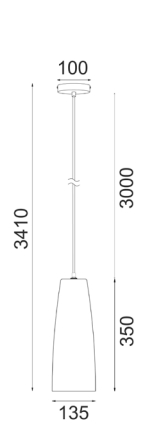





CHUVA1
(Flat Top Ellipse Shape)



CHUVA2
(Wine Glass Shape)







CHUVA4
(Oval Shape)

- Interior glass rain drop effect pendant lights
- Shade: glass & iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**CHUVA1, CHUVA2, CHUVA4**
Description	PENDANT Smokey BLK Glass with Rain Drop Effect + RND BLK Canopy
Material	Glass & iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	CHUVA1: Ø135xH350mm CHUVA2: Ø250xH215mm CHUVA4: Ø200xH280mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1



Lamina Interior Pendant Lights




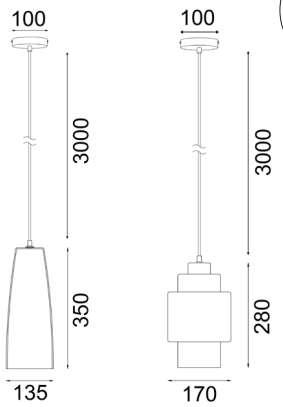



LAMINA1
(Ellipse Shape)

LAMINA3
(Double Cylinder Shape)

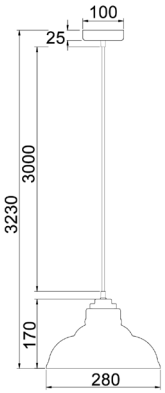



LAMINA4
(Dome Shape/ Chrome Interior)

- Interior copper painted glass pendant lights
- Shade: glass
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty


Part No.	**LAMINA1, LAMINA3, LAMINA4**
Description	PENDANT ES 72W Copper Coloured Glass + RND BLK Canopy
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	LAMINA1: Ø135xH350mm LAMINA3: Ø170xH280mm LAMINA4: Ø280xH170mm
Suspension	3000mm black cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Fumoso Interior Pendant Lights










FUMOSO1
(Cone Shape)



FUMOSO2
(Ellipse Shape)





FUMOSO3
(Dome Shape)

- Interior smokey black mirror finish glass with copper painting pendant lights
- Shade: iron & glass
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	**FUMOSO1, FUMOSO2, FUMOSO3**
Description	PENDANT Smokey Glass Mirror Finish with Copper Painting
Material	Iron & glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	FUMOSO1: Ø180xH280mm FUMOSO2: Ø145xH300mm FUMOSO3: Ø250xH270mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1



Casa Interior Pendant Lights



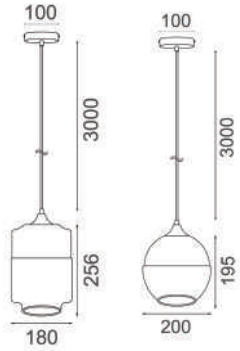




CASA1
(Cylinder Shape)



CASA2
(Wine Glass Shape)





CASA3
(Cylinder Shape)

- Amber & matte white painted glass pendant lights
- Shade: amber glass (partilally paint dipped)
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**CASA1, CASA2, CASA3**
Description	PENDANT Amber & Matte White Painted Glass + RND BLK Canopy
Material	Glass
Lamp Holder	1xE27 (Max.72W)
Dimensions	CASA1: Ø180xH256mm CASA2: Ø200xH195mm CASA3: Ø130xH285mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1



Mason Interior Pendant Lights





MASON1
(Amber)

MASON2
(Clear)

MASON3
(Smokey Black)



MASON4
(Amber)

MASON5
(Clear)

MASON6
(Smokey Black)



MASON7
(Amber)


MASON8
(Clear)


MASON9
(Smokey Black)


- Interior glass pendant lights
- Shade: glass & iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**MASON1-9**
Description	PENDANT Glass Cylinder/ Cylinder Tipped/ Oval with Black Highlight + RND BLK Canopy
Material	Glass & iron
Lamp Holder	1xE27 (Max.60W)
Dimensions	MASON1-3: Ø180xH360mm MASON4-6: Ø180xH310mm MASON7-9: Ø280xH200mm
Suspension	3000mm cable
Canopy Size	Ø100x40mm
Carton QTY	1/4








K

Tono Interior Pendant Lights






TONO1
(Clear Glass Black Mesh)



TONO2
(Clear Glass Copper Mesh)



TONO3
(Clear Glass Brass Mesh)



- Interior cylinder clear glass with mesh pendant lights
- Shade: glass
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	TONO1, TONO2, TONO3
Description	PENDANT Mesh Internal Cylinder (Dbl) Glass with Mesh + RND Canopy
Material	Powder coated iron & clear glass
Lamp Holder	1xE27 (Max.40W)
Dimensions	Ø200xH280mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/4



Gamba Interior Pendant Lights







GAMBA1
(Antique Brass &
Oiled Bronze)



GAMBA2
(Antique Brass &
Oiled Bronze)



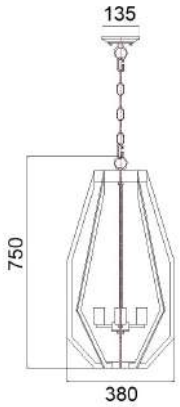

- Interior angular cage pendant lights
- Shade: antique brass & oiled bronze/ white & polished nickel
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**GAMBA1 & GAMBA2**
Description	GAMBA1: PENDANT ES x 5 60W Wide Antique Cage GAMBA2: PENDANT ES x 4 60W Narrow Antique Cage
Material	Antique brass & oiled bronze / White & polished nickel
Lamp Holder	GAMBA1: 5xE27 (Max.60W) GAMBA2: 4xE27 (Max.60W)
Dimensions	GAMBA1: Ø600xH451mm GAMBA2: Ø380xH750mm
Suspension	3000mm chain & cable
Canopy Size	Ø135mm
Carton QTY	1/1



Marte Interior Pendant Lights






MARTE1
(Black Iron Cage /
Brass Highlight)



MARTE2
(Matte Gold Iron Cage /
Black Highlight)



MARTE3
(White Iron Cage /
Black Highlight)

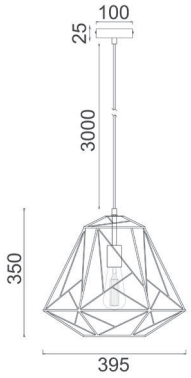

- Interior bell wire iron pendant lights
- Material: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**MARTE1, MARTE2, MARTE3**
Description	PENDANT ES 72W Iron Bell Wire With Highlight
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø395 x H350mm
Suspension	3000mm cable
Canopy Size	Ø100 x 25mm
Carton QTY	1/1



Cheveux Interior Pendant Lights





CHEVEUX1
(Ellipse)




CHEVEUX2
(Small Wine Glass Shape)



CHEVEUX3
(Bell Shape)



CHEVEUX4
(Large Wine Glass Shape)

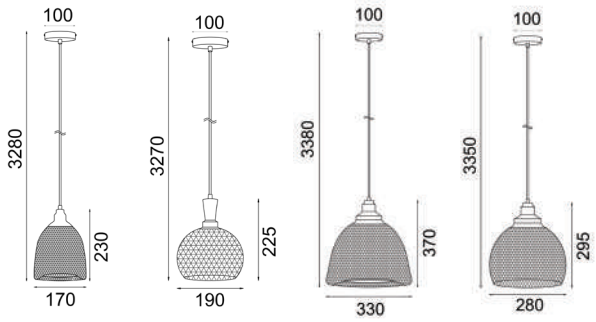

- Interior black mesh iron pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CHEVEUX1-4**
Description	PENDANT ES 72W BLK Mesh Iron +RND BLK Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	CHEVEUX1: Ø170xH230mm CHEVEUX2: Ø190xH225mm CHEVEUX3: Ø330xH370mm CHEVEUX4: Ø280xH295mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1



Strand Interior Pendant Lights





STRAND1
(Black)



STRAND2
(White)



- Interior dome wire with Blonde Wood pendant lights
- Shade: powder coated iron & wood
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**STRAND1, STRAND2**
Description	PENDANT ES 72W Iron Dome Wire with Blonde Wood +RND Canopy
Material	Iron & wood
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø400xH295mm
Suspension	3000mm cable
Canopy Size	Ø110x25mm
Carton QTY	1/1



Spiaggia Interior Pendant Lights



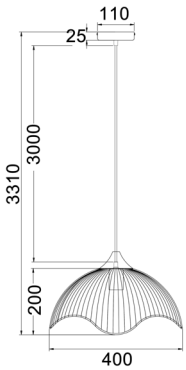




SPIAGGIA1
(Dome/ Black)



SPIAGGIA2
(Dome/ White)





SPIAGGIA3
(Cone/ Black)



SPIAGGIA4
(Cone/ White)

- Interior wavy edge iron pendant lights
- Shade: powder coated iron & wood
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**SPIAGGIA1-4**
Description	PENDANT ES 72W Iron Dome / Cone (Wavy Edge) w/Blonde Wood + RND Canopy
Material	Iron & wood
Lamp Holder	1xE27 (Max.72W)
Dimensions	SPIAGGIA1-2: Ø400xH250mm SPIAGGIA3-4: Ø330xH400mm
Suspension	3000mm cable
Canopy Size	Ø110x25mm
Carton QTY	1/1



Manu Interior Pendant Lights






MANU1
(Black)



MANU2
(White)






- Interior cone (concave) cage pendant lights
- Material: iron
- Globe not included
- For indoor use only


E27 | 1YEAR Replacement Warranty

Part No.	MANU1, MANU2
Description	PENDANT ES Cone (Concave) Wire Cage
Material	Iron
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø300 x H285mm
Suspension	3000mm cable
Canopy size	Ø100 x 25mm
Carton QTY	1/1

Veneto Interior Pendant Lights



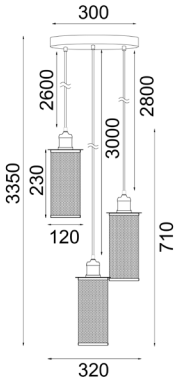





VENETO1X3BK



VENETO1BK





VENETO table lamps and interior wall lights are also available

- Interior cylinder black mesh iron pendant lights
- Mesh shade can be removed
- Shade: iron
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**VENETO1BK, VENETO1X3BK**
Description	PENDANT ES 72W Cylinder BLK Mesh Iron
Material	Iron
Lamp Holder	VENETO1BK: 1xE27 (Max.72W) VENETO1X3BK: 3xE27 (Max.72W)
Dimensions	VENETO1BK: Ø120xH230mm VENETO1X3BK: Ø320mm
Suspension	VENETO1BK: 3000mm cable VENETO1X3BK: 2.6m/ 2.8m/ 3m cable
Canopy Size	VENETO1BK: Ø100mm VENETO1X3BK: Ø300mm
Carton QTY	VENETO1BK: 1/10 VENETO1X3BK: 1/1



Sentinel Interior Pendant Lights




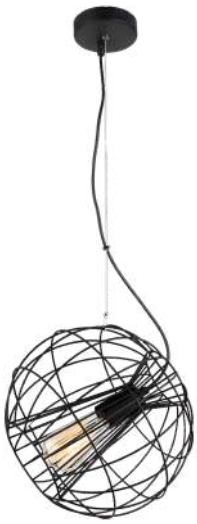

SENTINEL1
(Matte Black)



SENTINEL2
(Matte White)

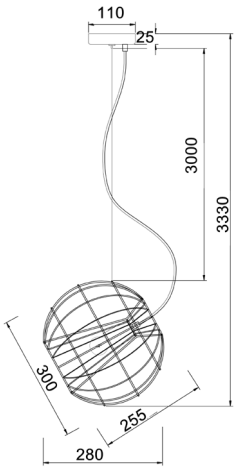

- Interior sphere wire iron with adjustable hanging angle pendant lights
- Shade: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty


Part No.	**SENTINEL1, SENTINEL2**
Description	PENDANT ES 72W Sphere Wire with Adjustable Hanging Angle + RND Matte BLK Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø300xH255mm
Suspension	3000mm cable
Canopy Size	Ø110x25mm
Carton QTY	1/1



Blackband & Whiteband

Interior Pendant Lights








BLACKBAND1
(Cylinder Wire Cage)

BLACKBAND2
(Bell Wire Cage)





BLACKBAND3
(Cylinder Wire Cage)

BLACKBAND4
(Pear Wire Cage)

- Interior iron wire cage pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty


GLOBE RESTRICTIONS (Max.globe dimensions):


BLACKBAND1: L135 x W60mm; BLACKBAND2: L N/A x W60mm;
BLACKBAND3: L180 x W30mm; BLACKBAND4: L130 x W30mm

Part No.	**BLACKBAND1-4**
Description	PENDANT ES 72W BLK Iron Wire Cage + RND BLK Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	BLACKBAND1: Ø117xH270mm BLACKBAND2: Ø150xH225mm BLACKBAND3: Ø80xH260mm BLACKBAND4: Ø110xH210mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1







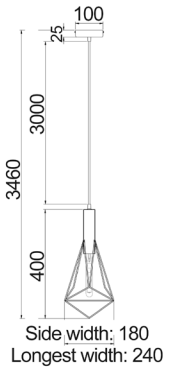

Side width: 180
Longest width: 240



BLACKBAND5
(Diamond Wire Cage)



BLACKBAND6
(Diamond Wire Cage)



WHITEBAND5
(Diamond Wire Cage)



WHITEBAND6
(Diamond Wire Cage)


GLOBE RESTRICTIONS (Max.globe dimensions):
BLACKBAND5 & WHITEBAND5: L180 x W30mm;
BLACKBAND6 & WHITEBAND6: L180 x W30mm

Part No.	**BLACKBAND5 & WHITEBAND5**
Description	PENDANT ES 72W Iron Diamond Wire Cage + RND Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	175xH420mm
Suspension	3000mm cable
Canopy Size	Ø100x25mm
Carton QTY	1/1

Part No.	**BLACKBAND6 & WHITEBAND6**
Description	PENDANT ES 72W Iron Diamond Wire Cage + RND Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	240(Widest point)xH400mm
Suspension	3000mm cable
Canopy Size	Ø100x25mm
Carton QTY	1/1










BLACKBAND1X3



BLACKBAND2X3

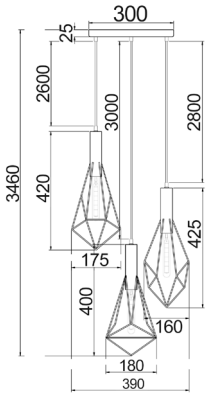



WHITEBAND1X3



WHITEBAND2X3

GLOBE RESTRICTIONS (Max.globe dimensions):
BLACKBAND1X3 & WHITEBAND1X3: L130 x W30mm;
BLACKBAND2X3 & WHITEBAND2X3: L180 x W30mm

Part No.	**BLACKBAND1X3 & WHITEBAND1X3**
Description	PENDANT ESX3 72W Iron Diamond Wire Cage + Bar Base
Material	Iron
Lamp Holder	3xE27 (Max.72W)
Dimensions	W630xH380mm
Suspension	3000mm cable
Canopy Size	L550xW40xH20mm
Carton QTY	1/1

Part No.	**BLACKBAND2X3 & WHITEBAND2X3**
Description	PENDANT ESX3 72W Iron Diamond Wire Cage Varied + RND Base
Material	Iron
Lamp Holder	3xE27 (Max.72W)
Dimensions	Ø390xmm
Suspension	3000mm cable
Canopy Size	Ø300x25mm
Carton QTY	1/1



Matrix Interior Pendant Lights






MATRIX-B
(Black)



MATRIX-W
(White)



- Interior iron dome (angled) cage pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**MATRIX-B, MATRIX-W**
Description	PENDANT ES 72W Dome (Angled) Cage + RND Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø360xH230mm
Suspension	3000mm cable
Canopy Size	Ø110mm
Carton QTY	1/1



Caviar Interior Pendant Lights



Gold Dimpled internal design




CAVIAR4
(Trumpet shape)





CAVIAR5
(Angled Wine Glass Shape)



CAVIAR6
(Cone Shape)



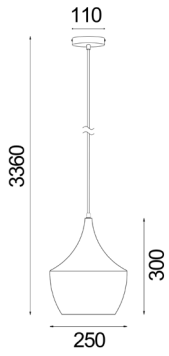



- Interior pendant lights
- Shade: powder coated aluminium
- Shade internal: dimpled design
- Shade interior colour: gold
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**CAVIAR4, CAVIAR5, CAVIAR6**
Description	PENDANT ES 72W BLK with Gold Dimpled Internal + RND BLK Canopy
Material	Aluminium
Lamp Holder	1xE27 (Max.72W)
Dimensions	CAVIAR4: Ø360xH170mm CAVIAR5: Ø250xH300mm CAVIAR6: Ø190xH400mm
Suspension	3000mm PVC cable
Canopy Size	Ø110mm
Carton QTY	CAVIAR4-5: 1/1 CAVIAR6: 1/10




Pastel Interior Pendant Lights





PASTEL01A
(Matte White)

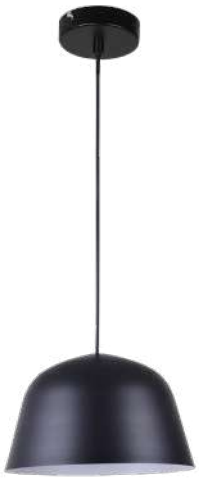

PASTEL02A
(Matte Black)




PASTEL03A
(Matte Pink)



PASTEL04A
(Matte Grey)

- Interior angled dome pendant lights
- Shade: powder coated iron
- Shade interior colour: white
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

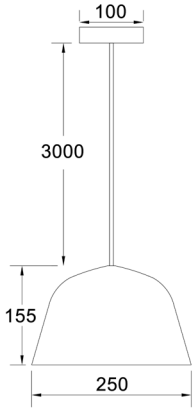

Part No.	**PASTEL01A-07A**
Description	PENDANT ES 40W Angled Dome + RND Canopy
Material	Iron
Lamp Holder	1xE27 (Max.40W)
Dimensions	Ø250xH155mm
Suspension	3000mm fabric cable
Canopy Size	Ø100mm
Carton QTY	1/1



PASTEL05A
(Matte Green)



PASTEL06A
(Matte Blue)



PASTEL07A
(Matte Yellow)





PASTEL08A
(Matte White)



PASTEL09A
(Matte Black)

- Interior dome pendant lights
- Shade: powder coated iron
- Shade interior colour: white
- Globe not included
- For indoor use only




Part No.	**PASTEL08A-14A**
Description	PENDANT ES 40W Dome with Copper plating + RND Canopy
Material	Iron
Lamp Holder	1xE27 (Max.40W)
Dimensions	Ø400xH216mm
Suspension	3000mm fabric cable
Canopy Size	Ø100mm
Carton QTY	1/1



PASTEL10A
(Matte Pink)



PASTEL11A
(Matte Grey)

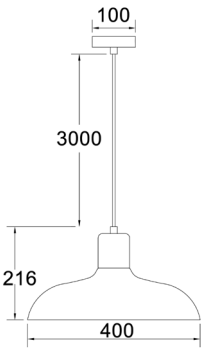



PASTEL table lamps & floor lamps are also available



PASTEL112A
(Matte Green)



PASTEL13A
(Matte Blue)



PASTEL14A
(Matte Yellow)

Alta Interior Pendant Lights






ALTA1
(Matte White)



ALTA2
(Matte Black)



ALTA3
(Matte Grey)



- Interior bell with copper plating pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ALTA1, ALTA2, ALTA3**
Description	PENDANT ES 72W Bell with Copper Plating + RND Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø225xH290mm
Suspension	3000mm cable
Canopy Size	Ø110mm
Carton QTY	1/1



***Product images have a warm white light source 'ON'.**
***ALTA interior wall lights are also available.**



Narvik Interior Pendant Lights






NARVIK1
(Matte White)



NARVIK2
(Matte Black)



NARVIK3
(Matte Grey)



- Interior dome with copper plating pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**NARVIK1, NARVIK2, NARVIK3**
Description	PENDANT ES 72W Dome with Copper Plating
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	Ø360xH280mm
Suspension	3000mm cable
Canopy Size	Ø110mm
Carton QTY	1/5



Divo Interior Pendant Lights





DIVO1
(Antique Brass)



DIVO2
(Chrome)



DIVO3
(Satin Chrome)

- Interior angled dome pendant lights
- Shade: powder coated steel
- Shade interior colour: white
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	DIVO1-10
Description	PENDANT ES 60W Angled Dome + RND Canopy
Material	Steel
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø355xH250mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	1/1




DIVO4
(White)



DIVO5
(Black)



DIVO6
(Blue)





DIVO7
(Red)



DIVO8
(Green)



DIVO9
(Yellow)



DIVO10
(Orange)




Deksel Interior Pendant Lights





DEKSEL03
(Rustic Aged Copper)

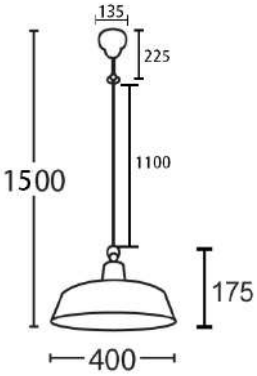


- Interior angled dome aged copper pendant light
- Shade: aged oxidised solid copper
- Globe not included
- For indoor use only

E27 | IP23 Rated | 2YEAR Replacement Warranty

Part No.	**DEKSEL03**
Description	PENDANT ES 60W Aged Copper (Brass Bracket & Base) + RND Tapered COP Canopy
Material	Copper
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø400xH175mm
Suspension	1100mm chain & cable
Canopy Size	Ø135x225mm
Carton QTY	1/4





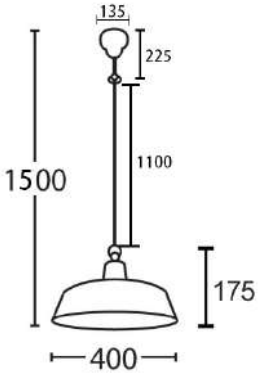



DEKSEL06
(Matte Black)

- Interior rustic matte black pendant light
- Shade: aluminium
- Globe not included
- For indoor use only

E27 | IP23 Rated | 2YEAR Replacement Warranty

Part No.	**DEKSEL06**
Description	PENDANT ES 60W Matte Black Angled Dome
Material	Aluminium
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø400xH175mm
Suspension	1100mm chain & cable
Canopy Size	Ø135x225mm
Carton QTY	1/4




DEKSEL exterior wall light & interior wall light are also available




Piatto Interior Pendant Lights





PIATTO1 (Large Coolie)
PIATTO2 (Small Coolie)

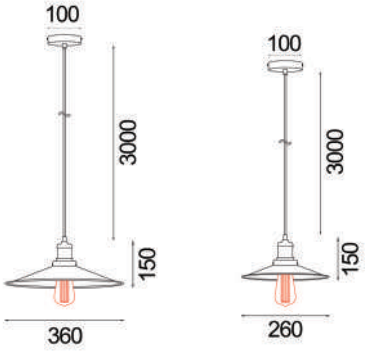



- Interior coolie black pendant lights
- Shade: powder coated iron
- Globe not included
- For indoor use only

E27

1 YEAR Replacement Warranty

Part No.	**PIATTO1, PIATTO2**
Description	PENDANT ES 72W BLK Coolie LGE/ SML + RND BLK Canopy
Material	Iron
Lamp Holder	1xE27 (Max.72W)
Dimensions	PIATTO1: Ø360xH150mm PIATTO2: Ø260xH150mm
Suspension	3000mm cable
Canopy Size	Ø100mm
Carton QTY	PIATTO1: 1/5 PIATTO2: 1/10


Pen Interior Pendant Lights





PEN2
(White)

PEN3
(Black)



- Interior pendant light suspensions
- Shade: silicone
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**PEN2 & PEN3**
Description	PENDANT ES 60W Suspension + RND Tapered Silicon Canopy
Material	Silicone
Lamp Holder	1xE27 (Max.60W)
Dimensions	Ø40xH95mm
Suspension	3000mm cable
Canopy Size	Ø120mm
Carton QTY	1/20

Cluster Interior Pendant Lights





CLUSTER1
(White)



CLUSTER2
(Black)



CLUSTER3
(White)





CLUSTER4
(Black)

- Cluster pendant canopies
- Available in 2 designs: Round (Max.6 lights) & Rectangular (Max.11 lights)
- Colour: Matt black / matt white
- Material: iron
- Surface mounted (Mounting bracket included)

IP20 Rated

1YEAR Replacement Warranty



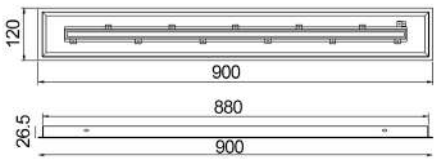

Part No.	Description	Dimensions	Carton QTY
CLUSTER1	RND Surface Mounted Cluster Canopy 6 Lights White	Ø220x26.5mm	1/10
CLUSTER2	RND Surface Mounted Cluster Canopy 6 Lights Black	Ø220x26.5mm	1/10
CLUSTER3	RECT Surface Mounted Cluster Canopy 11 Lights White	900x120x26.5mm	1/10
CLUSTER4	RECT Surface Mounted Cluster Canopy 11 Lights Black	900x120x26.5mm	1/10



DECOR LIGHTING | CEILING SPOT LIGHTS

Product actual colours may vary. This is due to the fact that every computer monitor has a different capability to display colours and that everyone sees these colours differently. We try to edit our photos to show the samples as life-like as possible, but please understand the actual colour may vary slightly from your monitor. We cannot guarantee that the colour you see accurately portrays the true colour of the product.

Lengan Interior Ceiling Spot Lights





LENGAN1B
(1XGU10)




LENGAN2B
(2XGU10)





LENGAN3B
(3XGU10)




LENGAN4B
(4XGU10)









- Input voltage: 220-240V AC 50/60Hz
- Housing: powder coated aluminium
- Mounting plate: iron
- 90° Tilt / 330° swivel
- Lamp holder: GU10 (Max.50W)
- Globe not included
- User-friendly design with easily replaceable lamps
- Rear vertilation holes for airflow & heat dissipation

GU10 | IP20 Rated | 2YEAR Replacement Warranty



Part No.	Description	Base	Carton QTY
LENGAN1B	SPOT 1 x GU10 Single Head ADJ Blk RND BASE L110mm	Ø80mm	1/36
LENGAN2B	SPOT 2 x GU10 Double Head ADJ Blk RND BASE L330mm	Ø95mm	1/36
LENGAN3B	SPOT 3 x GU10 Three Head ADJ Blk RND BASE L600mm	Ø95mm	1/12
LENGAN4B	SPOT 4 x GU10 Four Head ADJ Blk RND BASE L700mm	Ø95mm	1/12





LENGAN1W
(1XGU10)




LENGAN2W
(2XGU10)



LENGAN3W
(3XGU10)



LENGAN4W
(4XGU10)

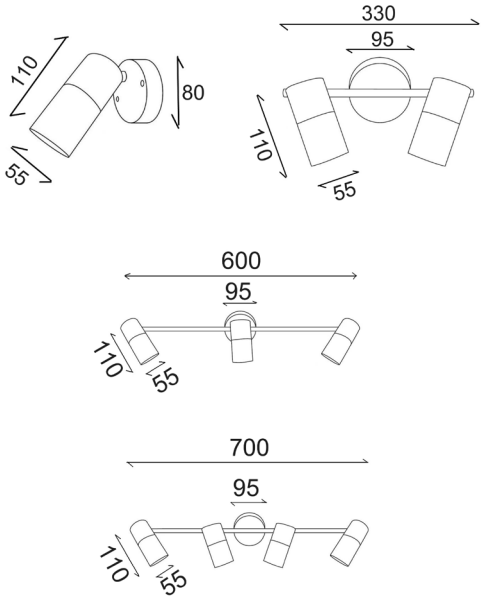



Part No.	Description	Base	Carton QTY
LENGAN1W	SPOT 1 x GU10 Single Head ADJ WH RND BASE L110mm	Ø80mm	1/36
LENGAN2W	SPOT 2 x GU10 Double Head ADJ WH RND BASE L330mm	Ø95mm	1/36
LENGAN3W	SPOT 3 x GU10 Three Head ADJ WH RND BASE L600mm	Ø95mm	1/12
LENGAN4W	SPOT 4 x GU10 Four Head ADJ WH RND BASE L700mm	Ø95mm	1/12

Spot Interior Ceiling Spot Lights





SPOT-R1B
(Round Base 1xGU10)



SPOT-S1B
(Square Base 1xGU10)



SPOT-R3B
(Round Base 3xGU10)



SPOT-BAR2B
(Bar Base 2xGU10)




SPOT-BAR3B
(Bar Base 3xGU10)




SPOT-BAR4B
(Bar Base 4xGU10)

- Input voltage: 100-240V AC 50/60Hz
- Housing: powder coated aluminium
- Mounting plate: iron
- 180° Tilt / 328° swivel
- Lamp holder: GU10 (Max.50W)
- Globe not included
- Globe grabber/ suction cap included


GU10 | IP20 Rated | 2YEAR Replacement Warranty




SPOT-R1B




SPOT-S1B




SPOT-R3B



SPOT-BAR2B

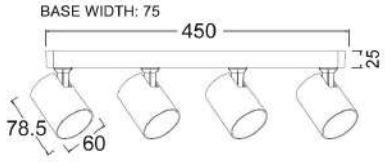

SPOT-BAR4B

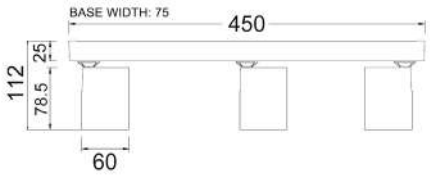

SPOT-BAR3B






SPOT-R1W
(Round Base 1xGU10)



SPOT-S1W
(Square Base 1xGU10)



SPOT-R3W
(Round Base 3xGU10)



SPOT-BAR2W
(Bar Base 2xGU10)



SPOT-BAR3W



SPOT-BAR4W

Part No.	Description	Base	Carton QTY
SPOT-S1B	SPOT GU10 1 LIGHT/ADJ SQ BASE BLK	L81xW81xH25mm	1/50
SPOT-R1B	SPOT GU10 1 LIGHT/ADJ RND BASE BLK	Ø60xH27mm	1/50
SPOT-R3B	SPOT GU10 3 LIGHT/ADJ RND BASE BLK	Ø230xH25mm	1/8
SPOT-BAR2B	SPOT GU10 2 LIGHT/ADJ BAR BLK	L250xW75xH25mm	1/12
SPOT-BAR3B	SPOT GU10 3 LIGHT/ADJ BAR BLK	L450xW75xH25mm	1/8
SPOT-BAR4B	SPOT GU10 4 LIGHT/ADJ BAR BLK	L450xW75xH25mm	1/8
SPOT-S1W	SPOT GU10 1 LIGHT/ADJ SQ BASE WH	L81xW81xH25mm	1/50
SPOT-R1W	SPOT GU10 1 LIGHT/ADJ RND BASE WH	Ø60xH27mm	1/50
SPOT-R3W	SPOT GU10 3 LIGHT/ADJ RND BASE WH	Ø230xH25mm	1/8
SPOT-BAR2W	SPOT GU10 2 LIGHT/ADJ BAR WH	L250xW75xH25mm	1/12
SPOT-BAR3W	SPOT GU10 3 LIGHT/ADJ BAR WH	L450xW75x25mm	1/8
SPOT-BAR4W	SPOT GU10 4 LIGHT/ADJ BAR WH	L450xW75xH25mm	1/8

Tache Interior Ceiling Spot Lights






TACHE1
(3XGU10)




TACHE2
(4XGU10)



TACHE3
(6XGU10)

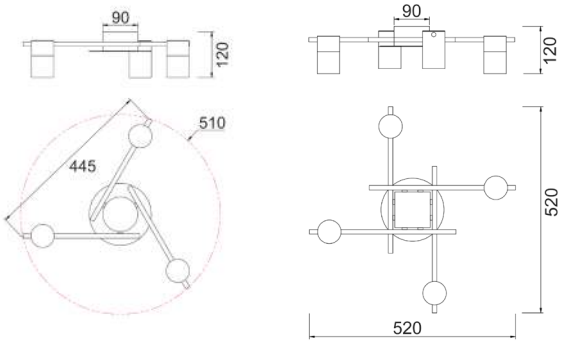



- Interior spot ceiling lights
- Material: aluminium
- Globe not included
- For indoor use only
- Warning: Adjustable head but Maximum 15°either way. Adjusting more than the suggested angle will cause damage to the fitting

GU10 | 1YEAR Replacement Warranty

Part No.	**TACHE1-3**
Description	SPOT GU10 Interior Ceiling Lamp Adj Ant/Brs Head w/Brs Rnd Base
Material	Aluminium
Lamp holder	TACHE1: 3 x GU10 (Max.35W) TACHE2: 4 x GU10 (Max.35W) TACHE3: 6 x GU10 (Max.35W)
Dimensions	TACHE1: Ø510 x H120mm TACHE2: 520 x 520 x H120mm TACHE3: 720 x 400 x H120mm
Base	TACHE1-2: Ø160mm TACHE3: Ø180mm
Canopy	TACHE1: Ø90 x H45mm TACHE2: Ø90 x H45mm TACHE3: Ø100 x H45mm
Carton QTY	1/1








TACHE4
(3XGU10)




TACHE5
(4XGU10)




TACHE6
(6XGU10)

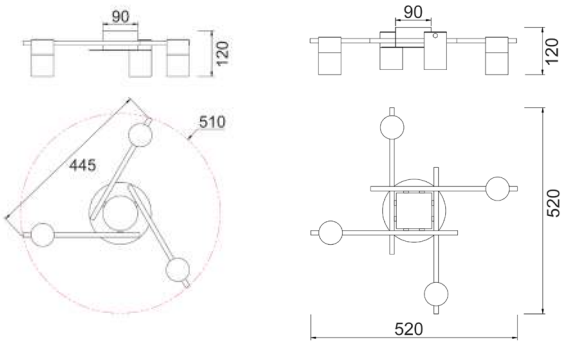



- Interior spot ceiling lights
- Material: aluminium
- Globe not included
- For indoor use only
- Warning: Adjustable head but Maximum 15°either way. Adjusting more than the suggested angle will cause damage to the fitting



Part No.	**TACHE4-6**
Description	SPOT GU10 Interior Ceiling Lamp Adj Blk & Ant/Brs Head w/Brs Rnd Base
Material	Aluminium
Lamp holder	TACHE4: 3 x GU10 (Max.35W) TACHE5: 4 x GU10 (Max.35W) TACHE6: 6 x GU10 (Max.35W)
Dimensions	TACHE4: Ø510 x H120mm TACHE5: 520 x 520 x H120mm TACHE6: 720 x 400 x H120mm
Base	TACHE4-5: Ø160mm TACHE6: Ø180mm
Canopy	TACHE4: Ø90 x H45mm TACHE5: Ø90 x H45mm TACHE6: Ø100 x H45mm
Carton QTY	1/1








TACHE7
(3XGU10)





TACHE8
(4XGU10)





TACHE9
(6XGU10)











- Interior spot ceiling lights
- Material: aluminium
- Globe not included
- For indoor use only
- Warning: Adjustable head but Maximum 15°either way. Adjusting more than the suggested angle will cause damage to the fitting

GU10 | 1YEAR Replacement Warranty

Part No.	**TACHE7-9**
Description	SPOT GU10 Interior Ceiling Lamp Adj Chrome Head w/Chrome Rnd Base
Material	Aluminium
Lamp holder	TACHE7: 3 x GU10 (Max.35W) TACHE8: 4 x GU10 (Max.35W) TACHE9: 6 x GU10 (Max.35W)
Dimensions	TACHE7: Ø510 x H120mm TACHE8: 520 x 520 x H120mm TACHE9: 720 x 400 x H120mm
Base	TACHE7-8: Ø160mm TACHE9: Ø180mm
Canopy	TACHE7: Ø90 x H45mm TACHE8: Ø90 x H45mm TACHE9: Ø100 x H45mm
Carton QTY	1/1








TACHE10
(3XGU10)





TACHE11
(4XGU10)





TACHE12
(6XGU10)











- Interior spot ceiling lights
- Material: aluminium
- Globe not included
- For indoor use only
- Warning: Adjustable head but Maximum 15° either way. Adjusting more than the suggested angle will cause damage to the fitting

GU10

1 YEAR Replacement Warranty

Part No.	**TACHE10-12**
Description	SPOT GU10 Interior Ceiling Lamp Adj Black Head w/Black Rnd Base
Material	Aluminium
Lamp holder	TACHE10: 3 x GU10 (Max.35W) TACHE11: 4 x GU10 (Max.35W) TACHE12: 6 x GU10 (Max.35W)
Dimensions	TACHE10: Ø510 x H120mm TACHE11: 520 x 520 x H120mm TACHE12: 720 x 400 x H120mm
Base	TACHE10-11: Ø160mm TACHE12: Ø180mm
Canopy	TACHE10: Ø90 x H45mm TACHE11: Ø90 x H45mm TACHE12: Ø100 x H45mm
Carton QTY	1/1








TACHE13
(3XGU10)




TACHE14
(4XGU10)



TACHE15
(6XGU10)

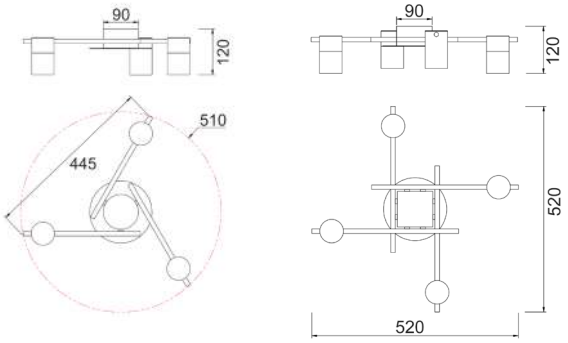



- Interior spot ceiling lights
- Material: aluminium
- Globe not included
- For indoor use only
- Warning: Adjustable head but Maximum 15° either way. Adjusting more than the suggested angle will cause damage to the fitting

GU10 | 1 YEAR Replacement Warranty

Part No.	**TACHE13-15**
Description	SPOT GU10 Interior Ceiling Lamp Adj White Head w/white Rnd Base
Material	Aluminium
Lamp holder	TACHE13: 3 x GU10 (Max.35W) TACHE14: 4 x GU10 (Max.35W) TACHE15: 6 x GU10 (Max.35W)
Dimensions	TACHE13: Ø510 x H120mm TACHE14: 520 x 520 x H120mm TACHE15: 720 x 400 x H120mm
Base	TACHE13-14: Ø160mm TACHE15: Ø180mm
Canopy	TACHE13: Ø90 x H45mm TACHE14: Ø90 x H45mm TACHE15: Ø100 x H45mm
Carton QTY	1/1





DECOR LIGHTING | TABLE & FLOOR LAMPS

Product actual colours may vary. This is due to the fact that every computer monitor has a different capability to display colours and that everyone sees these colours differently. We try to edit our photos to show the samples as life-like as possible, but please understand the actual colour may vary slightly from your monitor. We cannot guarantee that the colour you see accurately portrays the true colour of the product.

Kello Table & Floor Lamps







KELLO-T1
(Glossy Cream)



KELLO-T2
(Matte Black)







KELLO-F1
(Glossy Cream)



KELLO-F2
(Matte Black)

- Interior drum shade table & floor lamps
- Material: iron
- Base: Powder coated iron
- Globe not included
- Globe Restriction: KELLO-T table lamps are designed to fit only fancy round shaped globes




Part No.	**KELLO-T1, KELLO-T2, KELLO-F1, KELLO-F2**
Description	TABLE / FLOOR LAMP 2XES 60W DRUM Shade
Material	Iron
Lamp holder	2xE27 (Max.60W)
Dimensions	KELLO-T1 & 2: Ø280 x H 463mm KELLO-F1 & 2: Ø360 x H 1500mm
Flex & plug	KELLO-T: 1500mm black cable with on/off inline switch. Not dimmable KELLO-F: 1800mm black cable with on/off inline foot switch. Not dimmable
Base	KELLO-T: Ø180 x H 25mm KELLO-F: Ø260 x H 27.5mm
Carton QTY	1/1



Crecer Table & Floor Lamps








CRECER-T1
(Black Pleated Shade Antique Brass Highlight)



CRECER-T2
(White Pleated Shade Antique Brass Highlight)



CRECER-T3
(White pleated Shade Chrome Highlight)





CRECER-F1
(Black Pleated Shade Antique Brass Highlight)



CRECER-F2
(White Pleated Shade Antique Brass Highlight)



CRECER-F3
(White Pleated Shade Chrome Highlight)

- Interior slanted pleated shade table & floor lamps
- Material: fabric shade
- Rod & base: Electroplated iron
- Globe not included


E27 | 1 YEAR Replacement Warranty

Part No.	**CRECER-T1-3, CRECER-F1-3**
Description	TABLE / FLOOR LAMP ES 60W Slanted /Pleated Shade w/Ant Brass / Chrome Highlight Height Adjustable Telescop-ic Rod & Base
Material	Iron, fabric
Lamp holder	1xE27 (Max.60W)
Dimensions	CRECER-T: Ø250 x H 620mm CRECER-F: Ø360 x H 1665.4mm
Flex & plug	CRECER-T: 1500mm with on/off inline switch. Not dimmable CRECER-F: 1800mm with on/off inline foot switch. Not dimmable
Base	CRECER-T: Ø180 x H 25mm CRECER-F: Ø250 x H 27.5mm
Carton QTY	1/1



Jambes Table & Floor Lamps








JAMBES-T1
(Black Shade Antique Brass Tripod)



JAMBES-T2
(White Shade Antique Brass Tripod)





JAMBES-F1
(Black Shade Antique Brass Tripod)



JAMBES-F2
(White Shade Antique Brass Tripod)

- Interior drum shade table & floor lamps
- Material: fabric shade
- Rod: Electroplated iron
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**JAMBES-T1-2, JAMBES-F1-2**
Description	TABLE / FLOOR LAMP ES 60W Drum BLK / WH Shade w/Ant Brass Tripod
Material	Iron, fabric
Lamp holder	1xE27 (Max.60W)
Dimensions	JAMBES-T: Ø290 x H 590mm JAMBES-F: Ø450 x H 1590mm
Flex & plug	JAMBES-T: 1500mm with on/off inline switch. Not dimmable JAMBES-F: 1800mm with on/off inline foot switch. Not dimmable
Base	-
Carton QTY	1/1



Cristallo Table & Floor Lamps







CRISTALLO-T1



CRISTALLO-F1





- Interior drum shade table & floor lamps
- Material: fabric shade
- Base: iron & crystal
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**CRISTALLO-T1, CRISTALLO-F1**
Description	TABLE / FLOOR LAMP ES 60W White DRUM Shade & Chrome Iron Rod & Base w/Crystal
Material	Iron, fabric, crystal
Lamp holder	1xE27 (Max.60W)
Dimensions	CRISTALLO-T1: Ø300 x H 485mm CRISTALLO-F1: Ø380 x H 1510mm
Flex & plug	CRISTALLO-T1: 1800mm clear cable with on/off inline switch. Not dimmable CRISTALLO-F1: 1800mm clear cable with on/off inline foot switch. Not dimmable
Base	CRISTALLO-T1: Ø160mm CRISTALLO-F1: Ø280mm
Carton QTY	1/1




Paraguas Table & Floor Lamps





PARAGUAS-T1

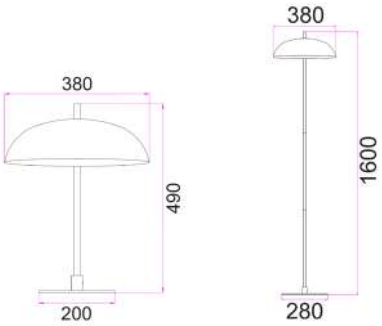



PARAGUAS-F1

- Interior dome shade table & floor lamps
- Material: iron & acrylic
- Base: iron
- Globe not included

E27 | 1YEAR Replacement Warranty

Part No.	**PARAGUAS-T1, PARAGUAS-F1**
Description	TABLE / FLOOR LAMP 2 x ES BLK Shade & Flat BLK Base w/Brass Rod
Material	Iron, acrylic
Lamp holder	2xE27 (Max.60W)
Dimensions	PARAGUAS-T1: Ø380 x H 490mm PARAGUAS-F1: Ø380 x H 1600mm
Flex & plug	PARAGUAS-T1: 1800mm black cable with on/off inline switch. Not dimmable PARAGUAS-F1: 1800mm black cable with on/off inline foot switch. Not dimmable
Base	PARAGUAS-T1: Ø200mm PARAGUAS-F1: Ø280mm
Carton QTY	1/1



Tazza Table & Floor Lamps






TAZZA-T1
(Matte Black & Antique Brass Highlight)



TAZZA-T2
(Matte White & Antique Brass Highlight)



TAZZA-T3
(Glossy Cream & Antique Brass Highlight)



- Interior ellipse shade with antique brass highlight table lamps
- Material: iron
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**TAZZA-T1, TAZZA-T2, TAZZA-T3**
Description	TABLE ES Matt ELLIPSE w/Antique Brass Highlight
Material	Iron
Lamp holder	1xE27 (Max.60W)
Dimensions	Ø135 x H 361mm
Flex & plug	1500mm with on/off inline switch. Not dimmable
Base	Ø125 x H 25mm
Carton QTY	1/12



TAZZA pendant light is also available



Flotar Table & Floor Lamps






FLOTAR-T1
(Black Shade Antique Brass Highlight)



FLOTAR-T2
(White Shade Antique Brass Highlight)







FLOTAR-F1
(Black Shade Antique Brass Highlight)



FLOTAR-F2
(White Shade Antique Brass Highlight)

- Interior cylinder shade table & floor lamps
- Material: iron
- Base: iron
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**FLOTAR-T1-2, FLOTAR-F1-2**
Description	TABLE / FLOOR LAMP ES Matt BLK / WH w/Ant Brass Highlight CYLINDER Shade Adjustable Head
Material	Iron
Lamp holder	1xE27 (Max.60W)
Dimensions	FLOTAR-T: Ø120 x H 429mm FLOTAR-F: Ø120 x H 1488mm
Flex & plug	FLOTAR-T: 1500mm with on/off inline switch. Not dimmable FLOTAR-F: 1800mm with on/off inline foot switch. Not dimmable
Base	FLOTAR-T: Ø150 x H27mm FLOTAR-F: Ø230 x H30mm
Carton QTY	1/1


THE ODYSSEY

Collo Table & Floor Lamps






COLLO-T1
(Matte Black Shade &
Antique Brass Highlight)



COLLO-T2
(Matte White Shade &
Antique Brass Highlight)





COLLO-T3
(Sand Grey Shade &
Antique Brass Highlight)



COLLO-T4
(Antique Brass Shade &
Highlight)

- Interior cone shade with Antique brass highlight table lamps
- Material: iron
- Globe not included

E27 | 1YEAR Replacement Warranty

Part No.	**COLLO-T1-4**
Description	TABLE ES Matt CONE w/Antique Brass Highlight Shade Adjustable Head
Material	Iron
Lamp holder	1xE27 (Max.60W)
Dimensions	Ø203 x H 500mm
Flex & plug	1500mm with on/off inline switch. Not dimmable
Base	Ø180mm
Carton QTY	1/1





Banca Table & Floor Lamps





BANCA-T1
(Sand Black & Antique Brass Highlight)



BANCA-T2
(Matte Black & Antique Brass Highlight)



BANCA-T3
(Antique Brass & Antique Brass Highlight)



- Interior cylinder shade with Antique brass highlight banker table lamps
- Material: iron
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**BANCA-T1, BANCA-T2, BANCA-T3**
Description	TABLE Bankers Lamp ES Metal Cylindrical Shade w/Ant Brass Highlight Adjustable Head
Material	Iron
Lamp holder	1xE27 (Max.60W)
Dimensions	W262 x H361mm
Flex & plug	1500mm with on/off inline switch. Not dimmable
Base	Ø183mm
Carton QTY	1/4



Lusso Table & Floor Lamps





LUSSO-T1



LUSSO-T2

- Interior black drum shade with ceramic base and antique brass highlight table lamps
- Material: fabric, iron, ceramic
- Globe not included


E27 | 1YEAR Replacement Warranty

Part No.	**LUSSO-T1, LUSSO-T2**
Description	TABLE ES BLK DRUM Shade & BLK Ceramic Base w/Ant Brass Highlight Shade
Material	Fabric, iron, ceramic
Lamp holder	1xE27 (Max.60W)
Dimensions	LUSSO-T1: Ø330 x H480mm LUSSO-T2: Ø410 x H650mm
Flex & plug	1800mm black cable with on/off inline switch. Not dimmable
Base	Ø150mm
Carton QTY	1/1



Tambura Table & Floor Lamps








TAMBURA07TL
(White)



TAMBURA08TL
(Black)





TAMBURA09TL
(White)




TAMBURA10TL
(Black)


- Interior table & floor lamps
- Material: cloth shade with wood veneer trim
- Base: Power coated iron
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**TAMBURA07-10TL, TAMBURA11-12FL**
Description	TABLE / FLOOR LAMP ES 72W SML Cylinder / Drum Cloth w/Blonde Wood
Material	Cloth shade with wood veneer trim, powder coated iron base
Lamp holder	1xE27 (Max.72W)
Dimensions	TAMBURA07-08TL: Ø150 x H460mm TAMBURA09-10TL: Ø300 x H470mm TAMBURA11-12FL: Ø400 x H1475mm
Flex & plug	TAMBURA07-10TL: 1850mm with on/off inline switch. Not dimmable TAMBURA11-12FL: 1750mm with on/off inline foot switch. Not dimmable
Base	TAMBURA07-08TL: Ø120mm TAMBURA09-10TL: Ø100mm TAMBURA11-12FL: Ø250mm
Carton QTY	1/1



TAMBURA Interior pendant lights are also available





TAMBURA11FL
(White)



TAMBURA12FL
(Black)

DECOR



Pastel Table & Floor Lamps





PASTEL15TL
(Matte White)



PASTEL16TL
(Matte Black)



PASTEL17TL
(Matte Pink)



PASTEL18TL
(Matte Grey)



PASTEL19TL
(Matte Green)




PASTEL20TL
(Matte Blue)

- Interior ellipse adjustbale head with ellipse stoage base table lamps
- Material: powder coated iron
- Neck fixed, head 360^0 adjustable
- Globe not included

E14 | 1YEAR Replacement Warranty

Part No.	**PASTEL15-21TL**
Description	TABLE LAMP SES Ellipse with Adjustable Head + Ellipse with Storage Base
Material	Powder coated iron
Lamp holder	1xE14 (Max.40W)
Dimensions	W160 x H490mm
Flex & plug	1800mm with on/off inline switch. Not dimmable
Base	Ø92mm (Can be a pen container)
Carton QTY	1/1

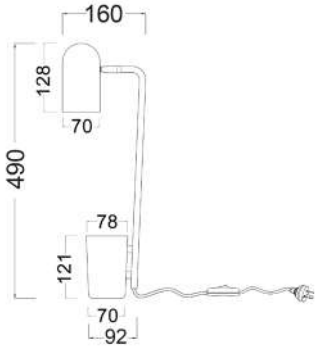



PASTEL21TL
(Matte Yellow)






PASTEL22FL
(Matte White)



PASTEL23FL
(Matte Black)



PASTEL24FL
(Matte Pink)

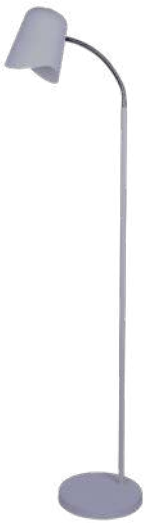

PASTEL25FL
(Matte Grey)



PASTEL26FL
(Matte Green)



PASTEL27FL
(Matte Blue)

- Interior ellipse with wavy edge floor lamps
- Material: powder coated iron
- Shde interior colour: white
- Globe not included

E27


1 YEAR Replacement Warranty

Part No.	**PASTEL22-28FL**
Description	FLOOR LAMP ES Ellipse with Wavy Edge with White Int Flexible + RND Base
Material	Powder coated iron
Lamp holder	1xE27 (Max.40W)
Dimensions	H1545mm
Flex & plug	2080mm with on/off foot inline switch. Not dimmable
Base	Ø250mm
Carton QTY	1/1





PASTEL interior pendant lights are also available

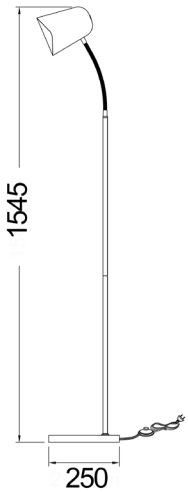




PASTEL28FL
(Matte Yellow)

Lotus Table & Floor Lamps







LOTUS1
(White Cloth/ Blonde Wood)



LOTUS2
(Brown Cloth/ Dark Wood)

- Interior oval cloth shade table lamps
- Material: wood & cloths
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**LOTUS1, LOTUS2**
Description	TABLE LAMP ES 40W Oval Cloth + Oval Wood Base
Material	Wood & cloth
Lamp holder	1xE27 (Max.40W)
Dimensions	W300 x H330 x D160mm
Flex & plug	1500mm with on/off inline switch. Not dimmable
Base	W300 x D100mm
Carton QTY	1/4




Autumn Table & Floor Lamps





AUTUMN04TL

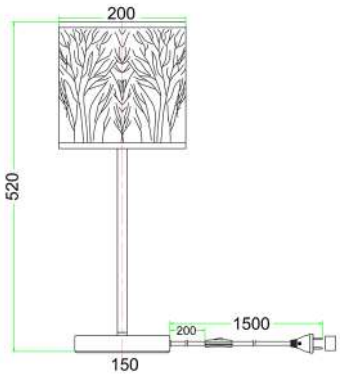

- Interior table lamp
- Shade: iron with aged bronze finish
- Shade lining: PC
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**AUTUMN04TL**
Description	TABLE LAMP ES 60W Drum Perforated (Trees) Aged Bronze + RND Aged Bronze Base
Material	Iron & PC
Lamp holder	1xE27 (Max.60W)
Dimensions	Ø200 x H520mm
Flex & plug	1500mm with on/off inline switch. Not dimmable
Base	Ø150mm
Carton QTY	1/1




Flatmate Table & Floor Lamps LED Tri-CCT



FLATMATE

- Eye Caring
- Tri-CCT and Dimmable
- USB Rechargeable, Adapter Included
- Adjustable lamp head



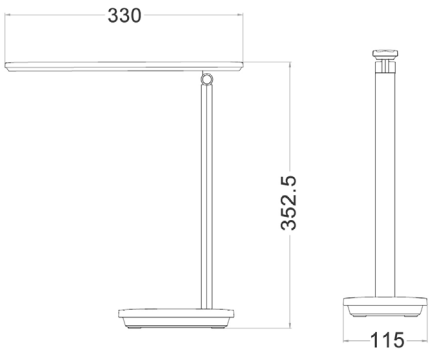

Part No.	FLATMATE	
LED	24pcs SMD2835	Tri-CCT
Switch Form	Touch	
Switch Position	Short Press: Colour Temp Changes (3 modes): 3000K / 4000K / 5000K Long Press: Dimming from 100% to 0%	
Power Supply	5V DC 1A	
Power	5W (without adaptor)	
Lumens	300LM	
Battery Type	Lithium battery 18650	1800mAh
Charging Time	Approx 4 hours	When light is switched off
Continuous Lighting Time	2 hours (unplugged)	
RA	≥80	
IP Rating	IP20 for indoor use only	
USB Cable Length	(Type C) 1m	Note: USB port can be used to charge phone (Android only) but has to be plugged in when charging.
Size	W 330mm x D 115mm x H 352.5mm	
Weight	0.34kg	
Anti Slip Pad	0 to 40°C	
Ambient Temperature	-10 to 60°C	
Carton QTY	1/10	

Penmate Table & Floor Lamps


LED Dual-CCT



Desk Lamp: 5000K

Night Light: 3000K (3 Steps **DIM** for night light)

- Eye Caring
- Flexible Neck (360⁰)
- 3-Level Brightness (Night Light)
- USB Rechargeable, Adapter Included

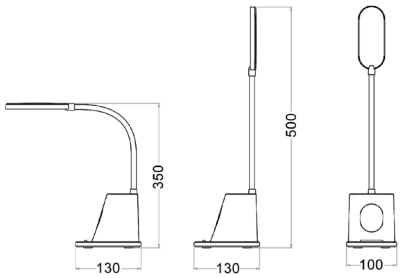

Part No	PENMATE	
LED	Desk Lamp: 2pcs x SMD2835 LED Night Light: 4pcs x SMD2835 LED	Desk lamp: 5000K Night Light: 3000K
Switch Form	Touch	
Switch Position	Desk Lamp: Single touch one brightness Night Light: Single touch three brightness	Off / On Off/ Low/ Middle/ High Brightness
Power Supply	5V DC 1A	
Power	About 2.8W	
Lumens	Adapter Powered	Desk Lamp: 160LM Night Light (3-Level Brightness): 30LM / 14LM / 4LM
	Rechargeable Battery Powered	Desk Lamp: 130LM Night Light: 24LM (High Brightness)
Battery Type	Lithium battery 18650	1800mAh
Charging Time	4 hours	When light is switched off
Continuous Lighting Time	Desk Lamp: approx 4 hours Night Light: approx 15 hours (High Brightness)	
RA	≥80	
IP Rating	IP20 for indoor use only	
USB Cable Length	(Type C) 1m	
Size	W 100mm x D 130mm x H 500mm	
Weight	0.3kg	
Anti Slip Pad	0 to 40⁰C	
Ambient Temperature	-10 to 60⁰C	
Carton Qty	1/20	

Buddy Table & Floor Lamps LED




BUDDY







- Eye Caring
- Flexible Neck (360^0)
- Max 2.36 Inch Opening Clip
- 3-Level Brightness
- USB Rechargeable, Adapter Included
- Scratch-resistant Silicon Pad

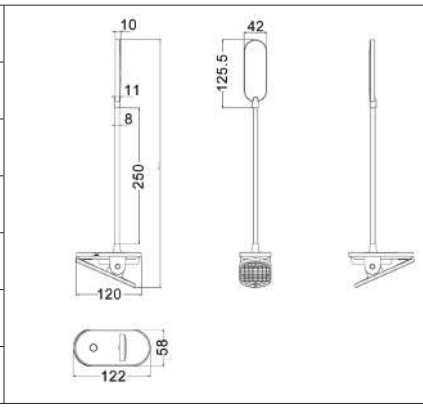Part No	**BUDDY**	
LED	12pcs SMD2835	6500K
Switch Form	Touch	
Switch Position	Single point shift position, Three touch dimming	Off/ High/ Middle/ Low Brightness
Power Supply	5V DC 1A	
Power	2.5W (High Brightness)	
Lumens (Adapter Powered)	140LM (High Brightness) / 60LM (Middle Brightness) / 14LM (Low Brightness)	
Lumens (Rechargeable Battery Powered)	100LM (High Brightness) / 40LM (Middle Brightness) / 10LM (Low Brightness)	
Battery Type	Lithium battery 18650	1200mAh
Charging Time	Approx 2.5 hours	When light is switched off
Continuous Lighting Time	3 hours (High Brightness); 7 hours (Middle Brightness); 30 hours (Low Brightness)	
RA	≥80	
IP Rating	IP20 for indoor use only	
USB Cable Length	(Type Micro) 1m	
Size	W 58mm x D 122mm x H 456mm	
Weight	0.19kg	
Ambient Temperature	0 to 40^{0}C	
Carton QTY	1/20	




DECOR LIGHTING | INTERIOR WALL LIGHTS

Product actual colours may vary. This is due to the fact that every computer monitor has a different capability to display colours and that everyone sees these colours differently. We try to edit our photos to show the samples as life-like as possible, but please understand the actual colour may vary slightly from your monitor. We cannot guarantee that the colour you see accurately portrays the true colour of the product.

Saber Interior Wall Lights

LED Dual-CCT



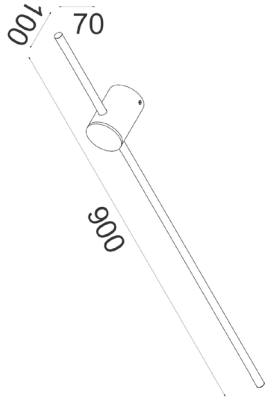



SABER1
(Black)



SABER2
(White)



- Interior linear LED dual CCT wall lights
- Input voltage: 220-240V 50Hz
- Housing: Powder coated aluminium
- Diffuser: Acrylic
- Mounting plate: iron
- Dual CCT (3000K / 5700K) in one fitting
- CCT switch inside mounting base
- LED chips: 2835
- Power factor: 0.85
- Ambient temperature: -20 to 50^{0}C
- IP20 for indoor use only
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensor

30,000hr Lifetime | 120° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty




Part No.	Description	Lumens		Watt	Dimensions	Base	Carton QTY
		3000K	5700K				
SABER1	WALL Int S/M LINEAR Blk Dual CCT	670lm	650lm	12W	L900xD100mm	Ø70mm	1/10
SABER2	WALL Int S/M LINEAR Wh Dual CCT	910lm	880lm	12W	L900xD100mm	Ø70mm	1/10

Racha Interior Wall Lights

LED Tri-CCT







RACHA1
(Black)



RACHA2
(White)



RACHA3
(Brass)

- Interior linear LED Tri-CCT wall lights
- Input voltage: 220-250V 50/60Hz
- Inbuilt constant current LED driver included
- Housing: aluminium
- Diffuser: white PC
- Mounting plate: iron
- Tri-CCT (3000K / 4000K / 5000K) in one fitting
- CCT switch inside mounting base
- LED chips: 240pcs 2835
- Power factor: 0.9
- CRI: >80
- Ambient temperature: -20 to 50^{0}C
- IP20 for indoor use only
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensor





Part No.	Description	Lumens			Watt	Dimensions	Base	Carton QTY
		3000K	4000K	5000K				
RACHA1	Wall S/M Linear Black Tri-CCT	1676LM	1863LM	1634LM	21.6W	L956xD65mm	Ø120mm	1/1
RACHA2	Wall S/M Linear White Tri-CCT	1676LM	1863LM	1634LM	21.6W	L956xD65mm	Ø120mm	1/1
RACHA3	Wall S/M Linear Brass Tri-CCT	1676LM	1863LM	1634LM	21.6W	L956xD65mm	Ø120mm	1/1

Flauta Interior Wall Lights






FLAUTA1W
(Smokey Black)



FLAUTA2W
(Amber)





- Interior ribbed round top cylinder wall lights
- Input voltage: 220-240V
- Material: iron & glass
- Lamp holder: 1xE14 (Max.40W)
- Globe not included
- For indoor use only

E14 | 1YEAR Replacement Warranty

Part No.	**FLAUTA1W, FLAUTA2W**
Description	Wall Int S/M 1 x SES Ribbed Round Top Cylinder
Material	Iron & glass
Lamp holder	1xE14 (Max.40W)
Dimensions	D200 x H530mm
Base	H160 x W60 x D25mm
Carton QTY	1/1



FLAUTA Interior pendant lights are also available

Varillas Interior Wall Lights





VARILLAS1
(Antique Brass)



VARILLAS2
(Chrome)




VARILLAS3
(Satin Chrome)



VARILLAS4
(Black)



VARILLAS5
(White)



- Interior up/down clear glass rod wall lights
- Input voltage: 220-240V
- Material: iron & clear glass
- Lamp holder: 2xE14 (Max.10W)
- 18pcs rods, rod size: Ø7xH300mm
- Globe not included
- For indoor use only

E14 | 1 YEAR Replacement Warranty

Part No.	**VARILLAS1-5**
Description	Wall Int S/M 2 x SES Up/Dn CLR Glass Rod
Material	Iron & glass
Lamp holder	2xE14 (Max.10W)
Over Diameter	Ø66mm
Rod dimensions	Ø7 x H300mm
Base	H400 x W80 x D25mm
Carton QTY	1/1



Tiempo Interior Wall Lights





TIEMPO1
(Antique Brass)



TIEMPO2
(Chrome)




TIEMPO3
(Satin Chrome)



TIEMPO4
(Black)



TIEMPO5
(White)



- Interior up/down tubular clear glass wall lights
- Input voltage: 220-240V
- Material: iron & clear glass
- Lamp holder: 2xE14 (Max.10W)
- Globe not included
- For indoor use only

E14 | 1 YEAR Replacement Warranty

Part No.	**TIEMPO1-5**
Description	WALL INTERNAL S/M 2 x SES Up/Dn 10W Tubular Shaped Clear Glass x 2
Material	Iron & glass
Lamp holder	2xE14 (Max.10W)
Over Diameter	Ø70mm
Base	Ø100 x D25mm
Carton QTY	1/1



Rodillo Interior Wall Lights





RODILLO1
(Antique Brass)



RODILLO2
(Chrome)




RODILLO3
(Satin Chrome)



RODILLO4
(Black)



RODILLO5
(White)



- Interior tubular clear glass wall lights
- Input voltage: 220-240V
- Material: iron & clear glass
- Lamp holder: 1xE14 (Max.10W)
- Globe not included
- For indoor use only


E14 | 1 YEAR Replacement Warranty


Part No.	**RODILLO1-5**
Description	WALL INTERNAL S/M SES 10W Tubular Shaped Clear Glass
Material	Iron & glass
Lamp holder	1xE14 (Max.10W)
Over Diameter	Ø70mm
Base	H160 x W70 x D25mm
Carton QTY	1/1



Balle Interior Wall Lights









BALLE1
(Gold)



BALLE1R
(Glod)



BALLE2
(Black)



BALLE2R
(Black)



BALLE3
(White)

BALLE3R
(White)

- Interior round opal diffuser wall lights
- Input voltage: 220-240V
- Material: iron & opal glass
- Lamp holder: 1xG9 (Max.10W)
- Globe not included
- For indoor use only

G9 | 1 YEAR Replacement Warranty

Part No.	**BALLE1-3, BALLE1-3R**
Description	WALL INTERNAL S/M 1 x G9 RND Opal Enclosed Diffuser with Oblong / Round Base
Material	Iron & opal glass
Lamp holder	1xG9 (Max.10W)
Diameter	BALLE1-3: Ø100mm BALLE1-3R: Ø120mm
Base	BALLE1-3: H180 x W97 x D25mm BALLE1-3R: Ø160 X D25mm
Carton QTY	1/10



Ovalis Interior Wall Lights






OVALIS1
(Gold)




OVALIS2
(Black)



OVALIS3
(White)





- Interior round opal diffuser oblong base with switch wall lights
- Input voltage: 220-240V
- Material: iron & opal glass
- Lamp holder: 1xG9 (Max.25W)
- Globe not included
- For indoor use only



Part No.	**OVALIS1, OVALIS2, OVALIS3**
Description	WALL INTERNAL S/M 1 x G9 RND Opal Enclosed Diffuser Oblong Base with Switch
Material	Iron & opal glass
Lamp holder	1xG9 (Max.25W)
Diffuser Diameter	Ø100mm
Base	H300 x W120 x D140mm
Carton QTY	1/10



Pesini Interior Wall Lights





PESINI1W
(Clear Glass)



PESINI4W
(Clear Glass)



PESINI2W
(Smokey Black Glass)



PESINI5W
(Smokey Black Glass)



PESINI3W
(Amber Glass)



PESINI6W
(Amber Glass)

- Interior glass with antique brass / chrome highlight wall lights
- Material: glass & iron
- Adjustable swing arm
- Globe not included
- For indoor use only


E27

1YEAR Replacement Warranty

Part No.	**PESINI1W-6W**
Description	WALL INTERNAL S/M ES 72W Wine Glass With Antique Brass /Chrome Bracket
Material	Glass & iron
Lamp holder	1xE27 (Max.72W)
Dimensions	D230 x H320mm
Back plate	Ø110 x 25mm
Carton QTY	1/1



PESINI interior pendant lights are also available







Adjustable swing arm




Clessidra Interior Wall Lights





CLESSIDRA1W
(Mirror Finished Smokey Black)





CLESSIDRA2W
(Opal)

- Interior ellipse wall lights
- Material: iron & glass
- For indoor use only
- Globe not included

E27 | 1 YEAR Replacement Warranty

Part No.	**CLESSIDRA1W, CLESSIDRA2W**
Description	Wall Internal S/M ES X 2 72W Ellipse
Material	Iron & glass
Lamp holder	2xE27 (Max.72W)
Dimensions	Ø120 x H290mm
Back plate	Ø100x25mm
Carton QTY	1/1



CLESSIDRA Interior pendant lights are also available




Vinum Interior Wall Lights





VINUM1W
(Chrome Glass)





VINUM2W
(Copper Coloured Glass)

- Interior glass wall lights
- Material: glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	**VINUM1W, VINUM2W**
Description	WALL INTERNALS/M ES 72W Glass Blk Iron Bracket With Chrome High-light
Material	Glass
Lamp holder	1xE27 (Max.72W)
Dimensions	W220 x H370mm
Back plate	Ø100 x 25mm
Carton QTY	1/1



VINUM Interior pendant lights are also available




Strung Interior Wall Lights





STRUNG1



- Interior surface mounted wall light
- Material: steel & glass
- Colour: black and antique bronze
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**STRUNG1**
Description	WALL INTERNAL S/M ES 40W Black / Antique Brass and Clear Pear Shaped Glass
Material	Glass & steel
Lamp holder	1xE27 (Max.40W)
Dimensions	W120 x H317 x D195mm
Back plate	H150 x W110 x D20mm
Carton QTY	1/4



Alta Interior Wall Lights






ALTA1W
(Matte White)



ALTA2W
(Matte Black)



ALTA3W
(Matte Grey)



- Interior surface mounted wall lights
- Head adjustable
- Material: iron
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**ALTA1W, ALTA2W, ALTA3W**
Description	WALL INTERNAL ES 72W Adj Bell (with Copper Highlights)
Material	Iron
Lamp holder	1xE27 (Max.72W)
Dimensions	Ø225 x H270mm
Back plate	Ø110mm
Carton QTY	1/10



ALTA interior pendant lights are also available



Deksel Interior Wall Lights






DEKSEL02
(Aged Copper)



DEKSEL05
(Matte Black)



- Interior aged copper / matte black wall lights
- Input voltage range: 110-265V AC
- Shade: aged oxidised solid copper or Aluminium
- Screw: stainless steel
- Globe not included
- For indoor use only

E27 | IP23 Rated | 2YEAR Replacement Warranty

Part No.	**DEKSEL02 & DEKSEL05**
Description	WALL INTERNAL S/M ES 60W Matte Aged Cop (Brass / Matte Black Aluminium Bracket & Base Neck)
Material	DEKSEL02: Copper DEKSEL05: Aluminium
Lamp holder	1xE27 (Max.60W)
Dimensions	430 x H295mm
Back plate	200 x 25mm
Carton QTY	1/1





DEKSEL interior pendant lights & exterior wall lights are also available



DECOR


Veneto Interior Wall Lights







VENETO-W1
(1XE27)





VENETO-W2
(2XE27)

- Interior surface mounted wall lights
- Material: iron
- Matte black finish
- Mesh shade can be removed
- Globe not included
- For indoor use only


E27 | 1 YEAR Replacement Warranty

Part No.	**VENETO-W1 & VENETO-W2**
Description	WALL INTERNAL S/M ES 72W BLK Iron
Material	Iron
Lamp holder	VENETO-W1: 1xE27 (Max.72W) VENETO-W2: 2xE27 (Max.72W)
Dimensions	VENETO-W1: D190 x H380mm VENETO-W2: W330 x H380mm
Back plate	Ø100mm
Carton QTY	1/1





VENETO interior pendant lights and table lamps are also available

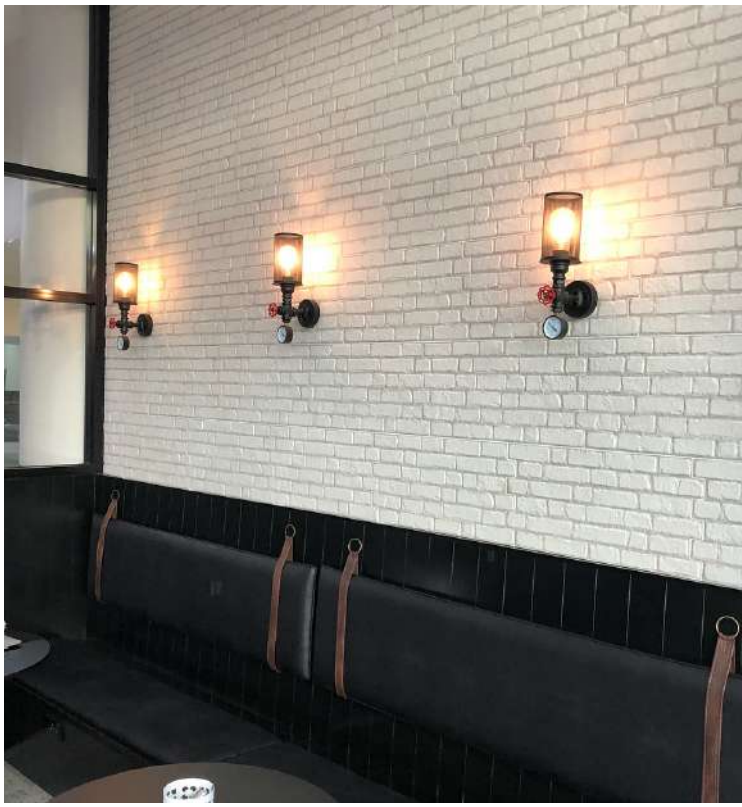

Steam Interior Wall Lights







STEAM2
(1XE27)





STEAM3
(4XE27)

- Interior surface mounted wall lights
- Material: iron (aged finish)
- Globe not included
- For indoor use only

E27 | 1 YEAR Replacement Warranty

Part No.	**STEAM2 & STEAM3**
Description	WALL INTERNAL S/M 72W Aged Iron Pipe
Material	Iron
Lamp holder	STEAM2: 1xE27 (Max.72W) STEAM3: 4xE27 (Max.72W)
Dimensions	STEAM2: D190 x H380mm STEAM3: W400 x H490mm
Back plate	Ø95mm
Carton QTY	1/1



Meti & Autumn Interior Wall Lights



METI03W


- Interior wall light
- Input voltage: 220-240V AC 50/60Hz
- Material: iron, wood & glass
- Globe not included
- For indoor use only

E27 | 1YEAR Replacement Warranty

Part No.	METI03W
Description	WALL INTERNAL ES Warm Chestnut Wood Frame Clear Glass Shades and Oil Rubbed Bronze Hardware
Material	Iron, wood & glass
Lamp holder	1xE27 (Max.60W)
Dimensions	W252 x H340 x D184mm
Back plate	Please see line drawing
Carton QTY	1/1



METI interior pendant lights are also available






AUTUMN03W

- Interior surface mounted wall light
- Shade: iron with aged bronze finish
- Shade lining: PC
- Globe not included
- For indoor use only

E14 | 1YEAR Replacement Warranty

Part No.	AUTUMN03W
Description	WALL Interior S/M SESx2 60W Curved Aged Bronze with Amber Lining
Material	Iron with aged bronze finish & PC
Lamp holder	2xE14 (Max.60W)
Dimensions	W200 x H280 x D115mm
Back plate	280X160mm
Carton QTY	1/1



City Series Interior Wall Lights *LED*




- Interior LED surface mounted wall lights
- Ideal to create ambient lighting
- Low energy long life LED chips
- 12V inbuilt constant current driver included
- Ambient temperature: -20 to 50°C
- For residential and indoor use only
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensor

30,000hr Lifetime | 120° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty




ATLANTA



Part No.	**ATLANTA**
Description	Wall Internal S/M City LED Dim-mable WH Rect Up/Dn
Material	Metal & acrylic
Kelvin	3000K/ 4000K/ 5700K
Lumens	691LM/ 754LM/ 707LM
Wattage	6W
LED chips	24pcs SMD2835
Dimensions	D 100 x W 195 x H 120mm
Back plate	L 185 x H 50 x 30mm
Carton QTY	1/10



BRISTOL




Part No.	**BRISTOL**
Description	Wall Internal S/M City LED Dim-mable WH Curved Up/Dn
Material	Aluminium
Kelvin	3000K/ 4000K/ 5700K
Lumens	565LM/ 614LM/ 605LM
Wattage	8W
LED chips	16pcs SMD2835
Dimensions	D 70 x W 270 x H 90mm
Back plate	L 220 x H 60 x 30mm
Carton QTY	1/10






BAGOTA



Part No.	**BAGOTA**
Description	Wall Internal S/M City LED Dim-mable WH Curved
Material	Metal
Kelvin	3000K/ 4000K/ 5700K
Lumens	812LM/ 930LM/ 860LM
Wattage	20W
LED chips	48pcs SMD2835
Dimensions	D 80 x W 145 x H 320mm
Back plate	L 70 x H 228 x 35mm
Carton QTY	1/10




CARDIFF



Part No.	**CARDIFF**
Description	Wall Internal S/M City LED Dimmable WH Rect Up/Dn 5W 120D Tri CCT
Material	Aluminium
Kelvin	3000K/ 4000K/ 5700K
Lumens	429LM/ 442LM/ 403LM
Wattage	5W
LED chips	12pcs SMD2835
Dimensions	D 75 x W 220 x H 130mm
Back plate	L 160 x H 90 x 30mm
Carton QTY	1/10




DHAKA



Part No.	**DHAKA**
Description	Wall Internal S/M City LED Dimmable WH Rect Up/Dn
Material	Aluminium
Kelvin	3000K/ 4000K/ 5700K
Lumens	650LM/ 747LM/ 645LM
Wattage	12W
LED chips	12pcs SMD2835
Dimensions	D 100 x W 220 x H 50mm
Back plate	L 220 x H 50mm
Carton QTY	1/10




HELSINKI



Part No.	**HELSINKI**
Description	Wall Internal S/M City LED Dimmable WH Curved Up/Dn
Material	Aluminium
Kelvin	3000K/ 4000K/ 5700K
Lumens	567LM/ 619LM/ 586LM
Wattage	6W
LED chips	12pcs SMD2835
Dimensions	D 110 x W 200 x H 60mm
Back plate	L 100 x H 60 x D 30mm
Carton QTY	1/10




LIMA1



Part No.	LIMA1
Description	Wall Internal S/M City LED Dimmable WH Round Rotatable
Material	Aluminium & Acrylic
Kelvin	3000K/ 4000K/ 5700K
Lumens	282LM/ 294LM/ 273LM
Wattage	5W
LED chips	SMD2835
Dimensions	D 50 x OD160 mm
Back plate	OD 110 x D 30mm
Carton QTY	1/10



LIMA2



Part No.	LIMA2
Description	Wall Internal S/M City LED Dimmable WH Square Rotatable
Material	Aluminium & Acrylic
Kelvin	3000K/ 4000K/ 5700K
Lumens	317LM/ 328LM/ 304LM
Wattage	6W
LED chips	SMD2835
Dimensions	D 50 x W 160 x H 160mm
Back plate	W 160 x D 30 mm
Carton QTY	1/10














Part No.	**NAGOYA**
Description	Wall Internal S/M City LED Dim-mable WH Rect Up/Dn
Material	Aluminium
Kelvin	3000K/ 4000K/ 5700K
Lumens	240LM/ 265LM/ 260LM
Wattage	5W
LED chips	12pcs SMD2835
Dimensions	D 70 x W 190 x H 120mm
Back plate	W 100 x H 60 x D 35 mm
Carton QTY	1/10

NAGOYA



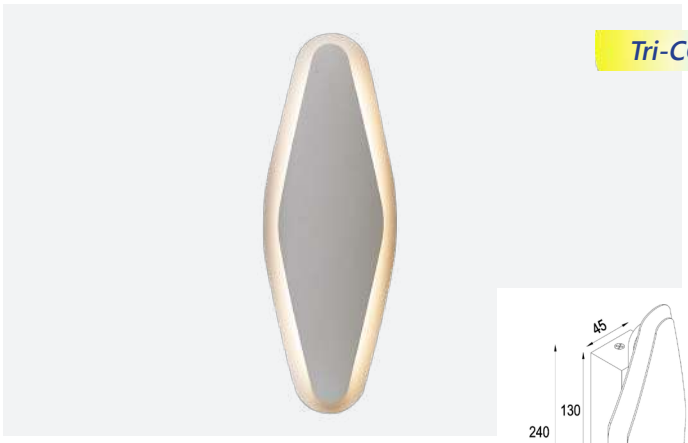


SANTIAGO




Part No.	SANTIAGO
Description	Wall Internal S/M City LED Dimmable WH Oval
Material	Metal
Kelvin	3000K/ 4000K/ 5700K
Lumens	250LM/ 275LM/ 265LM
Wattage	12W
LED chips	48pcs SMD2835
Dimensions	D 63 x W 80 x H 240 mm
Back plate	W 45 x H 130 x D 35mm
Carton QTY	1/10




SURAT



Part No.	SURAT
Description	Wall Internal S/M City LED Dimmable WH Triangular
Material	Aluminium
Kelvin	3000K/ 5000K
Lumens	273LM/ 284LM
Wattage	13W
LED chips	12pcs SMD2835
Dimensions	D 59 x W 157 x H 210mm
Back plate	W 50 x H 120 x D 40 mm
Carton QTY	1/10

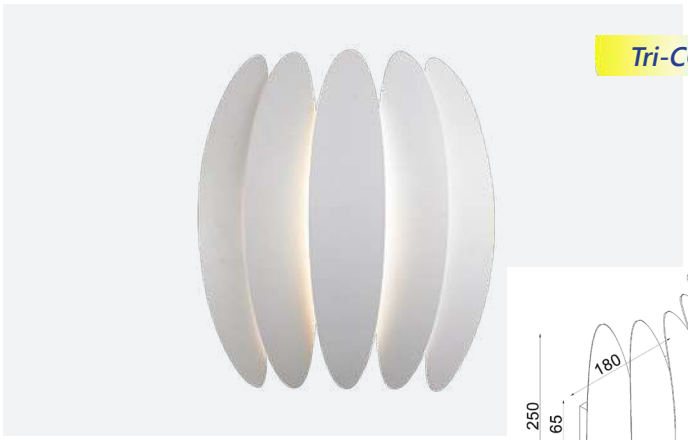


TIJUANA



Part No.	TIJUANA
Description	Wall Internal S/M City LED Dimmable WH Curved
Material	Metal
Kelvin	3000K/ 4000K/ 5700K
Lumens	551LM/ 615LM/ 597LM
Wattage	17W
LED chips	40pcs SMD2835
Dimensions	D 80 x W 225 x H 250mm
Back plate	W 180 x H 65 x D 33 mm
Carton QTY	1/10



ATHENSG2



Part No.	**ATHENSG2**
Description	WALL INTERNAL S/M CITY LED Matte WH Oval 1 Way
Material	Aluminium, iron & acrylic
Kelvin	3000K
Lumens	460LM
Wattage	6W
LED chips	36pcs 2835
Dimensions	D 93 x W 265mm
Back plate	L 100 x W 50 x 30mm
Carton QTY	1/12




BARCELONA




Part No.	**BARCELONA**
Description	WALL INTERNAL S/M CITY LED Clear Border / Frosted Inner Rect / Brushed S/C Plate
Material	Aluminium, brushed S/C, acrylic & iron
Kelvin	3000K
Lumens	614LM
Wattage	10W
LED chips	160pcs 2835
Dimensions	L 360 x W 135 x D 40mm
Back plate	L 310 x W 45mm
Carton QTY	1/12




CANNES




Part No.	**CANNES**
Description	WALL INTERNAL S/M CITY LED Matte WH Curved Up/DN
Material	Aluminium
Kelvin	3000K
Lumens	468LM
Wattage	6W
LED chips	12pcs 5630
Dimensions	L 250 x W 100 x D 91mm
Back plate	L 120 x W 60 x 35mm
Carton QTY	1/12

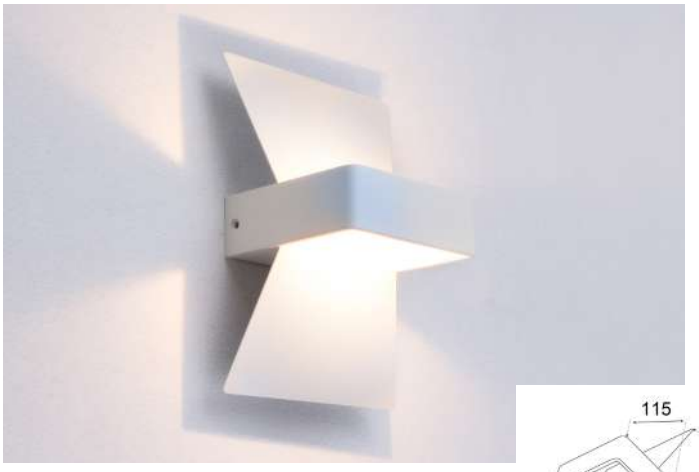


DAVOS



Part No.	**DAVOS**
Description	ALL INTERNAL S/M CITY LED MATT WH BOW
Material	Iron, Aluminium WH & Acrylic
Kelvin	3000K
Lumens	480LM
Wattage	16W
LED chips	1pc 2835 COB LED
Dimensions	L 220 x W 160 x D 115mm
Back plate	L 120 x W 40 x 45mm
Carton QTY	1/12

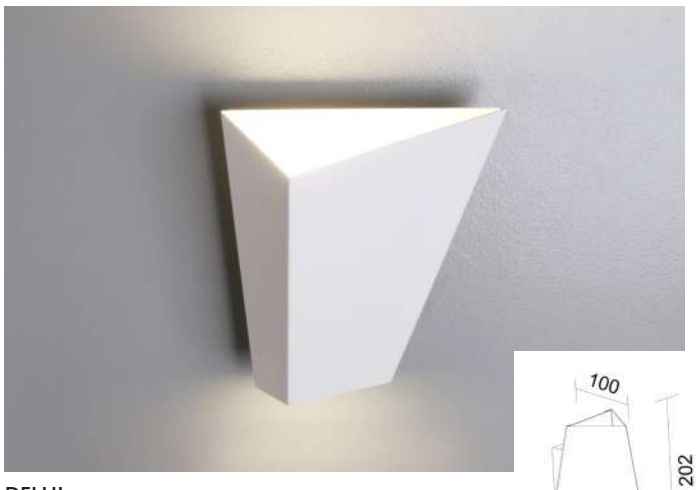


DELHI



Part No.	**DELHI**
Description	WALL INTERNAL Angled Up/ Down S/M CITY LED Sand WH
Material	Aluminium, acrylic & iron
Kelvin	3000K
Lumens	469LM
Wattage	12W
LED chips	24pcs 2835
Dimensions	L 202 x W 181 x D 100mm
Back plate	L 130 x W 60mm
Carton QTY	1/12




DUBAIG2



Part No.	**DUBAIG2**
Description	WALL INTERNAL S/M CITY LED Matte WH Curved
Material	Aluminium, iron & acrylic
Kelvin	3000K
Lumens	460LM
Wattage	6W
LED chips	36pcs 2835
Dimensions	262 x 155 x 85mm
Back plate	L 180 x W 60 x 35mm (Mounting U bracket: 170x30mm, Central 7mm cable hole)
Carton QTY	1/12




LONDON



Part No.	**LONDON**
Description	WALL INTERNAL S/M CITY LED Matte WH Cube UP/DN
Material	Aluminium
Kelvin	3000K
Lumens	450LM
Wattage	6W
LED chips	6pcs 5050
Dimensions	100x100x85mm
Back plate	L 100 x W 85 x 27mm (Mouting U bracket: 60x25mm)
Carton QTY	1/12




NEW YORKG2



Part No.	**NEW YORKG2**
Description	WALL INTERNAL S/M CITY LED S/ Nickel with Clear Acrylic Border Rect UP/DN
Material	Aluminium, iron & acrylic
Kelvin	3000K
Lumens	360LM
Wattage	6W
LED chips	36pcs 2835
Dimensions	L 170 x W 100 x D 68mm
Back plate	L140 x W 40 x 30mm (Mounting U bracket: 130x20mm, central 7mm cable hole)
Carton QTY	1/12




PARIS




Part No.	**PARIS**
Description	WALL INTERNAL S/M CITY LED S/C Adj Picture
Material	Iron, copper S/nickel
Kelvin	3000K
Lumens	611LM
Wattage	6W
LED chips	66pcs 2835
Dimensions	W 453 x D 208mm
Back plate	L 100 x W 45 x 25mm (Mouting U bracket: 90x20mm, central 25mm cable hole)
Carton QTY	1/12




PHOENIX



Part No.	**PHOENIX**
Description	WALL INTERNAL S/M CITY LED Matte WH Curved Uplight
Material	Aluminium, iron & acrylic
Kelvin	3000K
Lumens	395LM
Wattage	6W
LED chips	6pcs 5050
Dimensions	L 200 x W 60 x D 106mm
Back plate	L 90 x W 60mm (Mounting U bracket: 100x20mm, 25mm cable entry off to one side)
Carton QTY	1/12

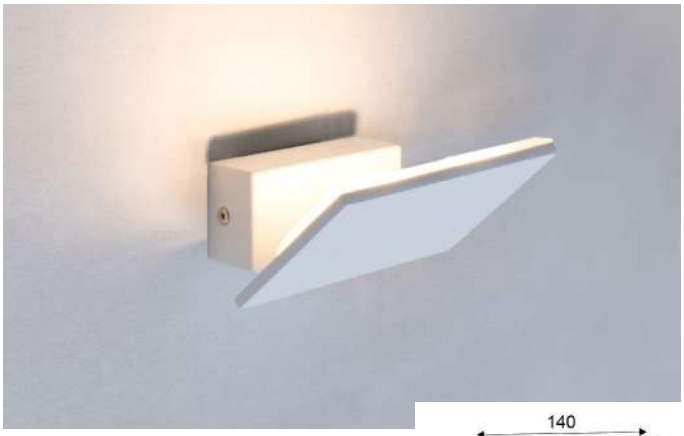


RIOG2




Part No.	**RIOG2**
Description	WALL INTERNAL S/M CITY LED Matte WH Rect Uplight 90D ADJ
Material	Aluminium, iron, copper WH & acrylic
Kelvin	3000K
Lumens	244LM
Wattage	2x3W
LED chips	2pcs 5050
Dimensions	L 140 x W 90 x D 120mm
Back plate	L100 x W 45 x 30mm (Mounting U bracket: 90x20mm, 25mm cable entry off to one side)
Carton QTY	1/12




ROMEG2



Part No.	**ROMEG2**
Description	WALL INTERNAL S/M CITY LED S/C TUBULAR Up/Dn
Material	Iron, aluminium s/chrome & acrylic diffuser
Kelvin	3000K
Lumens	230LM
Wattage	2x1W
LED chips	2pcs 3535
Dimensions	L 242 x W 80 x D 52mm
Back plate	L 100 x W 45 x 30mm (Central 25mm cable hole)
Carton QTY	1/12

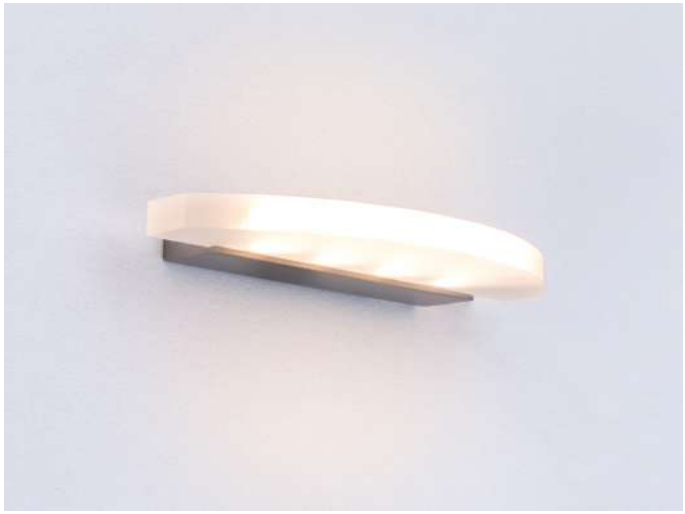


SYDNEYG2



Part No.	**SYDNEYG2**
Description	WALL INTERNAL S/M CITY LED S/N Curved Frosted DIFF
Material	Aluminium & acrylic
Kelvin	3000K
Lumens	460LM
Wattage	6W
LED chips	36pcs 2835
Dimensions	L 250 x W 30 x D 108mm
Back plate	L 180 x W 30 x 35mm (with 2x20mm cable holes 35mm from each other)
Carton QTY	1/12




VENICEG2



Part No.	**VENICEG2**
Description	WALL INTERNAL S/M CITY LED Matte WH Rect UP/DN
Material	Aluminium & iron
Kelvin	3000K
Lumens	615LM
Wattage	6W
LED chips	36pcs 2835
Dimensions	L 195 x W 36 x D 115mm
Back plate	L170 x W 36 x 30mm (Central 7mm cable entry)
Carton QTY	1/12




VIENNA



Part No.	**VIENNA**
Description	WALL INTERNAL S/M CITY LED Matte WH Rect with Clear / Frost Ribbed Diffuser
Material	Iron, aluminium & acrylic
Kelvin	3000K
Lumens	803LM
Wattage	12W
LED chips	12pcs 5050
Dimensions	L 320 x W 120 x D 80mm
Back plate	L 308 x W 90 x 38mm (Mounting plate: 160x30mm, central 7mm cable entry)
Carton QTY	1/12




SEATTLE1



Part No.	**SEATTLE1**
Description	WALL INTERNAL S/M CITY LED ADJ Bar Chrome
Material	Iron aluminium, chrome & acrylic frosted diffuser
Kelvin	3000K
Lumens	283LM
Wattage	3W
LED chips	3pcs 5050
Dimensions	L 90 x Ø90mm
Back plate	L90 x W 50 x D 35mm
Carton QTY	1/12




SEATTLE2

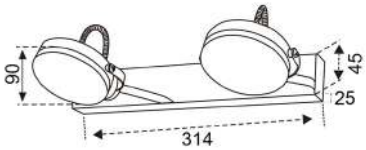

Part No.	**SEATTLE2**
Description	WALL INTERNAL S/M CITY LED ADJ 2LT Bar Chrome
Material	Iron aluminium, chrome & acrylic frosted diffuser
Kelvin	3000K
Lumens	563LM
Wattage	2x3W
LED chips	6pcs 5050
Dimensions	L 314 x Ø90mm
Back plate	L 314 x W 45 x D 25mm
Carton QTY	1/12




SEATTLE3



Part No.	**SEATTLE3**
Description	WALL INTERNAL S/M CITY LED ADJ 3LT Bar Chrome
Material	Iron aluminium, chrome & acrylic frosted diffuser
Kelvin	3000K
Lumens	840LM
Wattage	3x3W
LED chips	9pcs 5050
Dimensions	L 524 x Ø90mm
Back plate	L 524 x W 45 x D 25mm
Carton QTY	1/12




CHESTER01



Part No.	**CHESTER01**
Description	WALL INTERNAL S/M ADJ LED 6W WH 1 switch Clear PS Shade
Material	Aluminium housing, PS shade, iron mounting bracket
Kelvin	3000K
Lumens	402LM
Wattage	6W
LED chips	30pcs 2835
Dimensions	L 180 x W 130 x D 173.5mm
Back plate	180 x 50mm
Carton QTY	1/6




CHESTER02



Part No.	**CHESTER02**
Description	WALL INTERNAL S/M ADJ LED 6W WH 1 switch Clear PS Shade
Material	Aluminium housing, PS shade, iron mounting bracket
Kelvin	5000K
Lumens	480LM
Wattage	6W
LED chips	30pcs 2835
Dimensions	L 180 x W 130 x D 173.5mm
Back plate	180 x 50mm
Carton QTY	1/6




LYON



Part No.	**LYON**
Description	WALL LED S/M Adj Reading Light WH 3W
Material	Aluminium alloy, iron back plate
Kelvin	3000K
Lumens	342LM
Wattage	3W
LED chips	1pc 3535
Dimensions	120x60mm
Cut out	110x30mm
Back plate	120x60mm
Carton QTY	1/12
NOTE: Head is rotatable. Inclusion: on/off switch on back plate	




BRIGHTON01



Part No.	**BRIGHTON01**
Description	WALL INTERNAL S/M ES (60W) Flaxen Shade + LED (3W) Adj Matte WH Reading Light
Material	Cloth shade, aluminium back plate, iron mounting bracket
Lamp holder (main lamp)	1xE27 (Max.60W HAL)
Wattage (reading light)	3W
Kelvin (reading light)	3000K
Lumens (reading light)	278LM
LED chips (reading light)	1pc 3535
Dimensions	L 282 x W 160 x D 193mm
Back plate	L 140 x W 120mm, 2xON/OFF switch on bottom of back plate
Carton QTY	1/6



BRIGHTON02




Part No.	**BRIGHTON02**
Description	WALL INTERNAL S/M ES (60W) Flaxen Shade + LED (3W) Adj Matte WH Reading Light
Material	Cloth shade, aluminium back plate, iron mounting bracket
Lamp holder (main lamp)	1xE27 (Max.60W HAL)
Wattage (reading light)	3W
Kelvin (reading light)	5000K
Lumens (reading light)	298LM
LED chips (reading light)	1pc 3535
Dimensions	L 282 x W 160 x D 193mm
Back plate	L 140 x W 120mm, 2xON/OFF switch on bottom of back plate
Carton QTY	1/6


Vanitas Interior Wall Lights

LED Tri-CCT






VANITAS1S, 2S, 3S

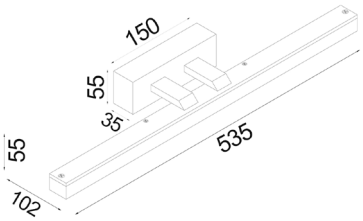

VANITAS1M, 2M, 3M

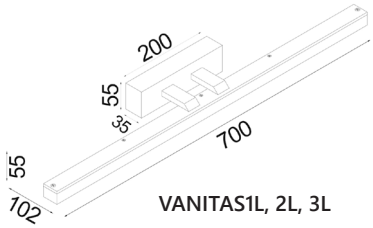

VANITAS1L, 2L, 3L



VANITAS1S, VANITAS1M, VANITAS1L
(White)



VANITAS2S, VANITAS2M, VANITAS2L
(Black)



VANITAS3S, VANITAS3M, VANITAS3L
(Chrome)

- Interior LED Tri-CCT vanity / picture wall lights
- Input voltage: 220-240V 50Hz
- Housing: Aluminium
- Mounting plate: iron
- Diffuser: Acrylic
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- CCT switch inside the fitting
- LED chips: SMD2835
- CRI: 80
- Power factor: 0.92
- Ambient temp: -20 to 50^{0}C
- Suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors

30,000hr Lifetime | 120^{0} Beam Angle | DIMMABLE | IP44 Rated | 2YEAR Replacement Warranty

For Tested and Recommended Dimmers:

- CLA-Trailing Edge: LYNX; VELA
- Clipsal-Universal: 32E450UDM, 31E2PUDM
- Clipsal-Trailing Edge: 32ELEDM-WE; 32E450TM
- HPM-Trailing Edge: CAT250T, CAT400T
- Diginet-LED Smart: MEDM, MMDM/RT



Part No.	Colour	Lumens			Watt	Length	Base	Carton QTY
		3000K	4000K	5700K				
VANITAS1S	Powder coated White	830lm	931lm	803lm	8W	370mm	150x55mm	1/10
VANITAS1M	Powder coated White	1270lm	1339lm	1241lm	12W	535mm	150x55mm	1/10
VANITAS1L	Powder coated White	1680lm	1880lm	1618lm	16W	700mm	200x55mm	1/10
VANITAS2S	Powder coated Black	830lm	931lm	803lm	8W	370mm	150x55mm	1/10
VANITAS2M	Powder coated Black	1270lm	1339lm	1241lm	12W	535mm	150x55mm	1/10
VANITAS2L	Powder coated Black	1680lm	1880lm	1618lm	16W	700mm	200x55mm	1/10
VANITAS3S	Electroplate Chrome	830lm	931lm	803lm	8W	370mm	150x55mm	1/10
VANITAS3M	Electroplate Chrome	1270lm	1339lm	1241lm	12W	535mm	150x55mm	1/10
VANITAS3L	Electroplate Chrome	1680lm	1880lm	1618lm	16W	700mm	200x55mm	1/10

Lineal Interior Wall Lights LED Tri-CCT







LINEAL1S, LINEAL1M, LINEAL1L
(White)



LINEAL2S, LINEAL2M, LINEAL2L
(Black)




LINEAL1S, 2S, 3S

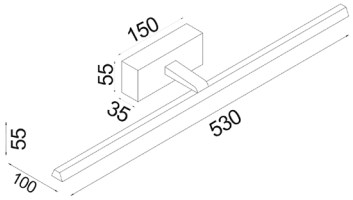

LINEAL1M, 2M, 3M



LINEAL3S, LINEAL3M, LINEAL3L
(Chrome)

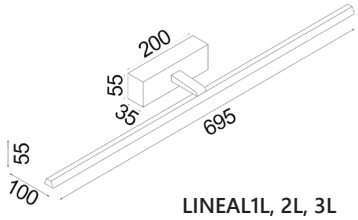

LINEAL1L, 2L, 3L



LINEAL4S, LINEAL4M, LINEAL4L
(Antique Brass)

- Interior LED Tri-CCT dimmable vanity/picture wall lights
- Input voltage: 220-240V 50Hz
- Housing: Aluminium
- Mounting plate: iron
- Diffuser: Acrylic
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- CCT switch inside the fitting
- LED chips: SMD2835
- CRI: 80
- Power factor: 0.92
- Ambient temp: -20 to 50^{0}C
- Suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors

30,000hr Lifetime | 120° Beam Angle | DIMMABLE | IP44 Rated | 2YEAR Replacement Warranty


For Tested and Recommended Dimmers:

- CLA-Trailing Edge: LYNX; VELA
- Clipsal-Universal: 32E450UDM, 31E2PUDM
- Clipsal-Trailing Edge: 32ELEDM-WE; 32E450TM
- HPM-Trailing Edge: CAT250T, CAT400T
- Diginet-LED Smart: MEDM, MMDM/RT



Part No.	Colour	Lumens			Watt	Length	Base	Carton QTY
		3000K	4000K	5700K				
LINEAL1S	Powder coated White	740LM	762LM	652LM	8W	365mm	150x55mm	1/10
LINEAL1M	Powder coated White	1090LM	1150LM	1000LM	12W	530mm	150x55mm	1/10
LINEAL1L	Powder coated White	1320LM	1531LM	1305LM	16W	695mm	200x55mm	1/10
LINEAL2S	Powder coated Black	740LM	762LM	652LM	8W	365mm	150x55mm	1/10
LINEAL2M	Powder coated Black	1090LM	1150LM	1000LM	12W	530mm	150x55mm	1/10
LINEAL2L	Powder coated Black	1320LM	1531LM	1305LM	16W	695mm	200x55mm	1/10
LINEAL3S	Electroplated Chrome	740LM	762LM	652LM	8W	365mm	150x55mm	1/10
LINEAL3M	Electroplated Chrome	1090LM	1150LM	1000LM	12W	530mm	150x55mm	1/10
LINEAL3L	Electroplated Chrome	1320LM	1531LM	1305LM	16W	695mm	200x55mm	1/10
LINEAL4S	Electroplated Antique Brass	740LM	762LM	652LM	8W	365mm	150x55mm	1/10
LINEAL4M	Electroplated Antique Brass	1090LM	1150LM	1000LM	12W	530mm	150x55mm	1/10
LINEAL4L	Electroplated Antique Brass	1320LM	1531LM	1305LM	16W	695mm	200x55mm	1/10

Vanidad Interior Wall Lights LED Tri-CCT

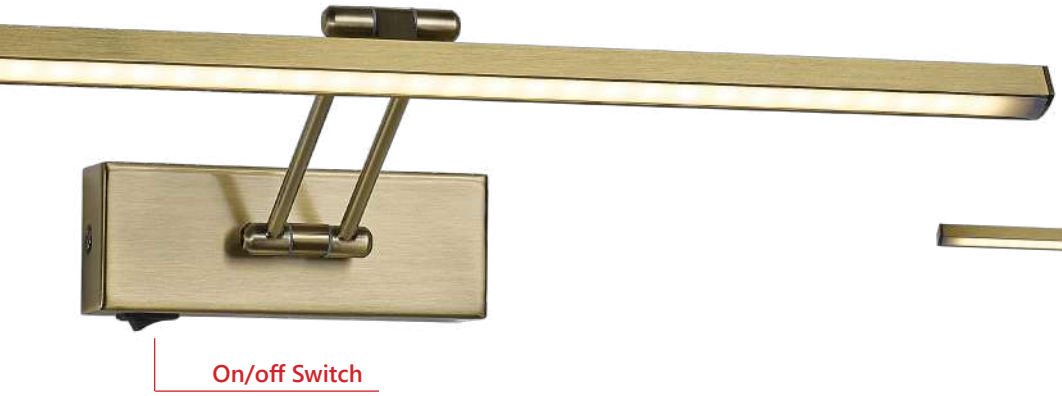




VANIDAD1L
(Antique Brass)



VANIDAD2L
(Chrome)

- Interior LED Tri-CCT dimmable picture wall lights
- Input voltage: 180-240V 50/60Hz
- Housing: Electroplate Aluminium
- Heat sink: Aluminium
- Mounting plate: iron
- Diffuser: frosted Acrylic
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- Inbuilt CCT switch under back plate
- On/off switch on the bottom of the base
- LED chips: 96pcs SMD2835
- CRI: 80
- Power factor: 0.92
- Ambient temp: -20 to 50^{0}C
- Suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors

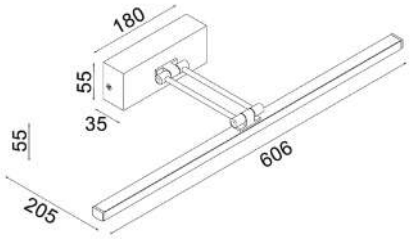


For Tested and Recommended Dimmers:

- CLA-Trailing Edge: LYNX1; VELA
- Clipsal-Universal: 32E450UDM, 31E2PUDM
- Clipsal-Trailing Edge: 32ELEDM-WE; 32E450TM
- HPM-Trailing Edge: CAT250T, CAT400T
- Diginet-LED Smart: MEDM, MMDM/RT





Part No.	Description	Lumens			Watt	Length	Base	Carton Qty
		3000K	4000K	5700K				
VANIDAD1L	WALL Int S/M 20W LINEAR Adj Ant Brass Tri Dim FR Diff	1212lm	1334lm	1311lm	20W	606mm	180x55mm	1/10
VANIDAD2L	WALL Int S/M 20W LINEAR Adj Chrome Tri Dim FR Diff	1212lm	1334lm	1311lm	20W	606mm	180x55mm	1/10

Vanity Interior Wall Lights LED

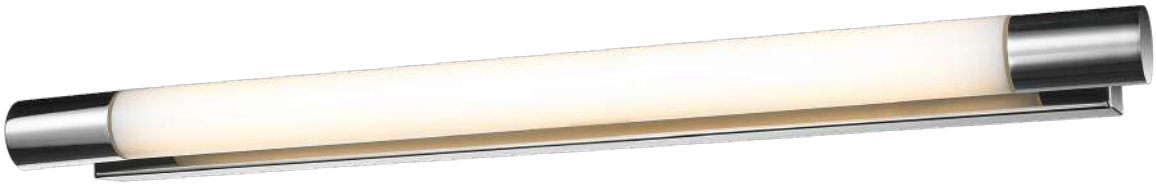

VANITY-1 (L490mm)
VANITY-2 (L810mm)





- Interior LED surface mounted wall lights
- Input voltage: 240V AC 50/60Hz
- 12V driver included
- Shade: Iron & stainless steel
- Diffuser: acrylic opal
- Chrome finish
- CRI: >80
- Ideal for creating ambient lighting
- Low energy longlife LED lighting
- Not suitable for dimming

50,000hr Lifetime | IP44 Rated | 2YEAR Replacement Warranty

Part No.	**VANITY-1 & VANITY-2**
Description	WALL INTERNAL S/M VANITY LED CHROME Frosted Acrylic Diffuser
Material	Iron, stainless steel, acrylic opal
Kelvin	4000K
Lumens	VANITY-1: 525LM VANITY-2: 986LM
Wattage	VANITY-1: 7.68W VANITY-2: 19.2W
CRI	>80
LED chips	-
Dimensions	VANITY-1: L490 x W50 x D85mm VANITY-2: L810 x W52 x D89mm
Back plate	VANITY-1: L440 x W36 x D50mm VANITY-2: L760 x W36 x D52mm
Carton QTY	VANITY-1: 1/12 VANITY-2: 1/6






DECOR LIGHTING | DIY DECOR LIGHTING

Product actual colours may vary. This is due to the fact that every computer monitor has a different capability to display colours and that everyone sees these colours differently. We try to edit our photos to show the samples as life-like as possible, but please understand the actual colour may vary slightly from your monitor. We cannot guarantee that the colour you see accurately portrays the true colour of the product.

Diyvintaj DIY Decor Lighting







DIYVINTAJ1
(Smokey Black)



DIYVINTAJ2
(Green)



DIYVINTAJ3
(Amber)



DIYVINTAJ4
(Copper)



DIYVINTAJ5
(Chrome)



DIYVINTAJ6
(Clear)

- D.I.Y. dome ribbed glass batten fittings
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron & glass
- Globe type: B22 (Max.72W)
- Globe not included
- Batten holder not included


IP20 Rated | 1 YEAR Replacement Warranty

Part No.	**DIYVINTAJ1-6**
Description	DIY Batten Fitting VINTAJ Glass Shade Dome
Material	Iron & glass
Lamp Holder	-
Dimensions	Ø200 x H 150mm
Back plate	Ø67mm
Carton QTY	1/1



Diybat DIY Decor Lighting







DIYBAT01
(Black / Clear Glass)



DIYBAT02
(Chrome / Clear Glass)



DIYBAT03
(Black / Smokey Black Glass)



DIYBAT04
(Chrome / Smokey Black Glass)


- D.I.Y. wine glass batten fittings
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron & glass
- Globe type: B22 (Max.40W)
- Globe not included
- Batten holder not included

IP20 Rated | 1 YEAR Replacement Warranty

Part No.	**DIYBAT01-04**
Description	DIY Batten Fitting Wine Glass Clear / Smokey Black
Material	Iron & glass
Lamp Holder	-
Dimensions	Ø200 x H 235mm
Back plate	Ø80mm
Carton QTY	1/8









DIYBAT05
(Black / Clear Glass)



DIYBAT06
(Chrome / Clear Glass)



DIYBAT07
(Black / Smokey Black Glass)



DIYBAT08
(Chrome / Smokey Black Glass)


- D.I.Y. cone (flat top) batten fittings
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron & glass
- Globe type: B22 (Max.40W)
- Globe not included
- Batten holder not included

IP20 Rated | **1YEAR** Replacement Warranty

Part No.	**DIYBAT05-08**
Description	DIY Batten Fitting SML Cone Clr/ Smokey
Material	Iron & glass
Lamp Holder	-
Dimensions	Ø180 x H 175mm
Back plate	Ø80mm
Carton QTY	1/12









DIYBAT09
(Black / Clear Glass)



DIYBAT10
(Chrome / Clear Glass)



DIYBAT11
(Black / Smokey Black Glass)



DIYBAT12
(Chrome / Smokey Black Glass)

- D.I.Y. sphere ribbed batten fittings
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron & glass
- Globe type: B22 (Max.40W)
- Globe not included
- Batten holder not included

IP20 Rated | 1 YEAR Replacement Warranty

Part No.	**DIYBAT09-12**
Description	DIY Batten Fitting LGE Spherical Ribbed Clr/ Smokey
Material	Iron & glass
Lamp Holder	-
Dimensions	Ø200 x H 240mm
Back plate	Ø120mm
Carton QTY	1/8







DIYBAT13
(Black / Clear Glass)




DIYBAT14
(Chrome / Clear Glass)



DIYBAT15
(Black / Smokey Black Glass)



DIYBAT16
(Chrome / Smokey Black Glass)

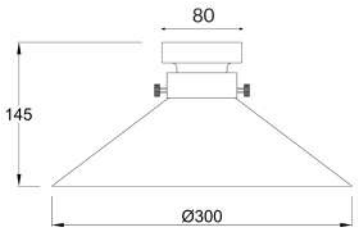

- D.I.Y. coolie batten fittings
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron & glass
- Globe type: B22 (Max.40W)
- Globe not included
- Batten holder not included

IP20 Rated

1YEAR Replacement Warranty

Part No.	**DIYBAT13-16**
Description	DIY Batten Fitting LGE Coolie Clr/ Smokey
Material	Iron & glass
Lamp Holder	-
Dimensions	Ø300 x H 145mm
Back plate	Ø80mm
Carton QTY	1/4







DIYBAT17
(Black / Clear Glass)




DIYBAT18
(Chrome / Clear Glass)



DIYBAT19
(Black / Smokey Black Glass)



DIYBAT20
(Chrome / Smokey Black Glass)



- D.I.Y. cylinder batten fittings
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron & glass
- Globe type: B22 (Max.40W)
- Globe not included
- Batten holder not included


IP20 Rated

1 YEAR Replacement Warranty

Part No.	**DIYBAT17-20**
Description	DIY Batten Fitting Oblong Clr/ Smokey OD180mm
Material	Iron & glass
Lamp Holder	-
Dimensions	Ø180 x H 165mm
Back plate	Ø80mm
Carton QTY	1/12









DIYBATC01
(Copper)



DIYBATC02
(Polished Brass)



DIYBATC03
(Antique Brass)



DIYBATC04
(Chrome)



DIYBATC05
(Black)



DIYBATC06
(White)

- D.I.Y. cone (flat top) batten fitting covers
- Input voltage range: 220-240V AC
- Surface mounted
- Material: iron
- Globe type: B22 (Max.40W)
- Globe not included
- Batten holder not included

IP20 Rated

1YEAR Replacement Warranty

Part No.	**DIYBATC01-06**
Description	DIY Batten Fitting Cover
Material	Iron
Lamp Holder	-
Dimensions	Ø90 x H 70mm
Back plate	Ø90mm
Carton QTY	1/24



Shade DIY Decor Lighting





SHADE01
(White)




SHADE02
(Black)



SHADE03
(Grey)



SHADE09
(Natural)







Adjustable Wireframe

- D.I.Y. drum lampshades
- Adjustable wireframe: iron (white)
- Shade: linen
- Lining: PVC (white)
- Versatile: suits table lamps, floor lamps, pendant lights or mount it on ceiling with a batten holder
- Includes adaptor rings to suit bigger lamp holders

1YEAR Replacement Warranty

Part No.	**SHADE01-03, SHADE09**
Description	DIY Drum Lampshade
Material	Iron, linen & PVC
Lamp Holder	-
Dimensions	Ø320 x H 230mm
Carton QTY	1/1







SHADE05
(White)




SHADE06
(Black)



SHADE07
(Grey)



SHADE10
(Natural)





- D.I.Y. slant lampshades
- Adjustable wireframe: iron (white)
- Shade: linen
- Lining: PVC (white)
- Versatile: suits table lamps, floor lamps, pendant lights or mount it on ceiling with a batten holder
- Includes adaptor rings to suit bigger lamp holders

1 YEAR Replacement Warranty

Part No.	**SHADE05-07, SHADE10**
Description	DIY Slant Lampshade
Material	Iron, linen & PVC
Lamp Holder	-
Dimensions	Ø250 / Ø320 x H 230mm
Carton QTY	1/1

Diypen DIY Decor Lighting





BC Plug adaptor
to suit standard
Batten holder





DIYPEN1
(Black)



DIYPEN2
(White)

- D.I.Y. pendant suspension kits
- Input voltage: 220-240V
- Material: iron
- Lamp holder: 1xE27 (Max.40W globe)
- **Maximum weight of shade: 1kg**
- Globe/Batten holder not included
- Cable can be adjusted
- For indoor use only

E27

1YEAR Replacement Warranty



Application with CLA SHADE Series



Part No.	Description	Colour	Diameter	Cable	Canopy	Carton Qty
DIYPEN1	DIY Pendant Suspension Kit Plug in ES BLK L 3m	Black	Ø50mm	3000mm	Ø75x100mm	1/10
DIYPEN2	DIY Pendant Suspension Kit Plug in ES BLK L 3m	White	Ø50mm	3000mm	Ø75x100mm	1/10




EXTERIOR LIGHTING

For environments with harsh weather conditions or heavy rainfall, IP65 fittings are recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use. For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



TREEC





- Exterior tree / single pendant light
- Input voltage: 12V DC/AC
- External Control Gear Required
- Recommended CLA LED driver: OTTER1
- Lamp holder: MR11 (Replaced by removing cylinder from canopy-held by 1 screw) (Max.20W)
- Globe not included
- Recommended CLA LED MR11 Globes

MR11 | IP23 Rated | 2YEAR Replacement Warranty

Part No.	**TREEC**
Description	TREE / PENDANT EXTERIOR MR11 12V Cylinder Perforated (Holes) COP + Br chain
Material	Solid copper
Lamp Holder	1xMR11 (Max.20W)
Dimensions	Ø60 x H 255mm
Suspension	50mm chain & 950mm cable
Carton QTY	1/1

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Spy Exterior Lighting





SPY-C1
(Matte White / Pendant Light)



SPY-C2
(Matte Black / Pendant Light)




SPY-W1
(Matte White / Wall Light)



SPY-W2
(Matte Black / Wall Light)

- Exterior pendant & surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Shade: aluminium
- Diffuser: glass
- Lamp holder: E27 (Max.60W Halogen/ 10W LED)
- Globes not included



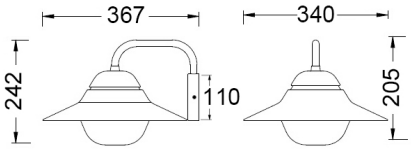

Part No.	**SPY-C1, SPY-C2**
Description	PENDANT Ec ES 60W Sun Hat with FR Diff + RND Canopy
Material	Aluminium & glass
Lamp Holder	1xE27 (Max.60W HAL/ 10W LED)
Dimensions	Ø340 x H 205mm
Suspension	3m cable
Canopy	Ø110mm
Carton QTY	1/4

Part No.	**SPY-W1, SPY-W2**
Description	WALL ES 60W Sun Hat w/FR Diff + RND Base
Material	Aluminium & glass
Lamp Holder	1xE27 (Max.60W HAL/ 10W LED)
Dimension	367 x H 242mm
Back plate	Ø110 x D20mm
Carton QTY	1/1



**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Villaku Exterior Lighting






VILLAKU1
(Matte Black)



VILLAKU2
(Matte White)





- Exterior cylinder aluminium & glass with cage ceiling / wall lights
- Input voltage: 220-240V
- Material: aluminium & clear glass
- Lamp holder: 1xE27 (Max.60W globe)
- Globe not included

E27 | IP44 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Colour	Material	Carton Qty
VILLAKU1	Wall/Ceiling ES Cylinder Matt Blk Alum & Glass w/cage	Matte Black	Aluminium	1/6
VILLAKU2	Wall/Ceiling ES Cylinder Matt Wh Alum & Glass w/cage	Matte White	Aluminium	1/6

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Parol Exterior Lighting





PAROL1
(Matte Black Iron)



PAROL2
(Matte White Iron)




PAROL3
(Galvanized Iron)



PAROL4
(Electroplated Copper
Brush Finish)



PAROL5
(Electroplated Brass
Brush Finish)





- Exterior cylinder glass with cage wall lights
- Input voltage: 220-240V
- Material: Aluminium / Stainless Steel 304 & clear glass
- Lamp holder: 1xE27 (Max.60W globe)
- Globe not included



Part No.	Description	Colour	Material	Carton Qty
PAROL1	Wall ES Cylinder Matt Blk Alum & Glass w/cage	Matte Black	Aluminium	1/6
PAROL2	Wall ES Cylinder Matt Wh Alum & Glass w/cage	Matte White	Aluminium	1/6
PAROL3	Wall ES Cylinder Galvanized Alum & Glass w/cage	Galvanized	Aluminium	1/6
PAROL4	Wall ES Cylinder SS304 Copper & Brush Glass w/cage	Electroplated Copper	SS 304	1/6
PAROL5	Wall ES Cylinder SS304 Brass & Brush Glass w/cage	Electroplated Brass	SS 304	1/6

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Payong Exterior Lighting





PAYONG1
(Matte Black Iron)



PAYONG2
(Matte White Iron)




PAYONG3
(Galvanized Iron)



PAYONG4
(Electroplated Copper
Brush Finish)



PAYONG5
(Electroplated Brass
Brush Finish)



- Exterior sun hat shape with clear glass wall lights
- Input voltage: 220-240V
- Material: Aluminium/Stainless Steel 304 & clear glass
- Lamp holder: 1xE27 (Max.60W globe)
- Globe not included

E27 | IP44 Rated | 2 YEAR Replacement Warranty




Part No.	Description	Colour	Material	Carton Qty
PAYONG1	WALL ES Sun Hat Matt Blk Alum Clr Glass	Matte Black	Aluminium	1/4
PAYONG2	WALL ES Sun Hat Matt Wh Alum Clr Glass	Matte White	Aluminium	1/4
PAYONG3	WALL ES Sun Hat Galvanized Alum Clr Glass	Galvanized	Aluminium	1/4
PAYONG4	WALL ES Sun Hat SS304 Cop & Brush Clr Glass	Electroplated Copper	SS 304	1/4
PAYONG5	WALL ES Sun Hat SS304 Brass & Brush Clr Glass	Electroplated Brass	SS 304	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Keila Exterior Lighting







KEILA1
(Matte Black Aluminium)



KEILA2
(Matte White Aluminium)

- Exterior oval surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Shade: powder coated aluminium
- Diffuser: clear glass
- Lamp holder: GU10 (Max.35W)
- Globes not included


GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	**KEILA1, KEILA2**
Description	WALL S/M GU10 (Max 35W) OVAL Matt Blk / Wh Alum & Glass Diffuser IP65
Material	Aluminium, glass
Lamp holder	1xGU10 (Max.35W)
Dimensions	Ø80 x H120mm
Back plate	Ø52mm
Carton QTY	1/1



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Cuchara Exterior Lighting

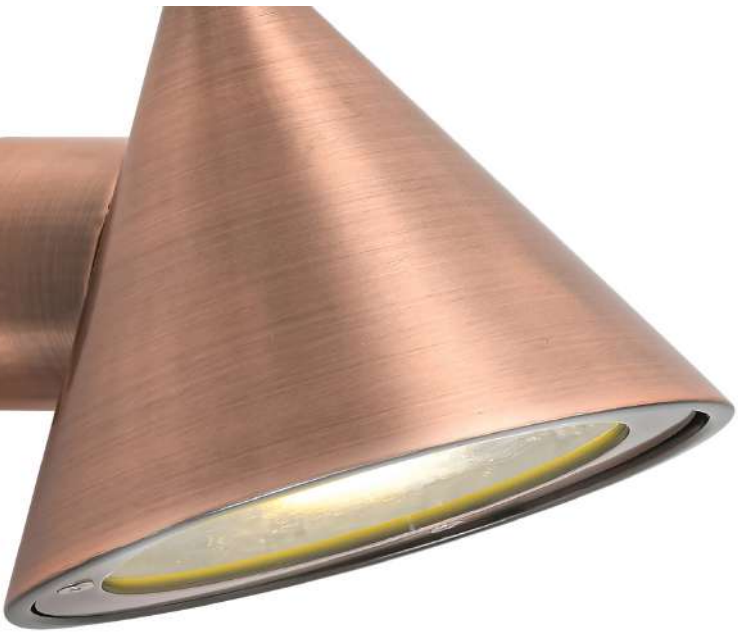



CUCHARA1
(Black aluminium)



CUCHARA2
(White aluminium)




CUCHARA5
(Electroplated Brass Aluminium)



CUCHARA4
(Electroplated Copper Aluminium)



CUCHARA3
(Galvanized Iron)



- Exterior cone surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Shade: galvanized iron or aluminium
- Diffuser: clear glass
- Lamp holder: GU10 (Max.35W)
- Globes not included
- IP rating: IP65 (CUCHARA3: IP44)



Part No.	**CUCHARA1-5**
Description	WALL S/M GU10 CONE Matt Black Alum & Glass Diff IP65
Material	Galvanized iron or Aluminium
Lamp holder	1xGU10 (Max.35W)
Dimensions	Ø149 x 133mm
Back plate	Ø56.5mm
Carton QTY	1/1



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Skopa Exterior Lighting






SKOPA1
(Galvanized Steel)



SKOPA2
(Copper)



- Exterior surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Material: galvanized steel or copper
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP44 Rated | 2YEAR Replacement Warranty

Part No.	**SKOPA1, SKOPA2**
Description	WALL GU10 S/M Cone (Flat Top) + RND FLUSH Base
Material	Galvanized steel/ copper
Lamp holder	1xGU10 (Max.35W)
Dimensions	Ø110 x H 111 x D 140mm
Back plate	Ø50x D35mm
Carton QTY	1/12



EXTERIOR

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Deksel Exterior Lighting






DEKSEL01
(Copper)




DEKSEL04
(Matte Black)



- Exterior surface mounted wall light
- Input voltage range: 110-265V AC
- Shade: aged oxidised solid copper or aluminium
- Screw: stainless steel
- Lamp holder: E27 (Max.60W)
- Globe not included

E27 | IP54 Rated | 2 YEAR Replacement Warranty

Part No.	**DEKSEL01, DEKSEL04**
Description	WALL ES 60W Sun Hat Aged COP w/ Gooseneck OR Matte Black
Material	DEKSEL01: Aged oxidised solid copper DEKSEL04: aluminium
Lamp holder	1xE27 (Max.60W)
Dimensions	400x320mm
Back plate	115x25mm
Carton QTY	1/4




DEKSEL interior wall light and interior pendant light are also available

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Hink Exterior Lighting







HINK1
(Matte Black)



HINK2
(Matte White)

- Exterior surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Material: aluminium
- Lamp holder: E27 (Max.60W)
- Globes not included

E27 | IP44 Rated | 3YEAR Replacement Warranty

Part No.	**HINK1, HINK2**
Description	WALL ES 60W S/M Ellipse with Cage w/Gooseneck + RND Base
Material	Aluminium
Lamp holder	1xE27 (Max.60W)
Dimensions	Ø204 x H 378 x D 260mm
Back plate	Ø105x D20mm
Carton QTY	1/6



**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Magnum Exterior Lighting






MAGNUM1
(Matte White)



MAGNUM2
(Matte Black)



- Exterior surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: aluminium
- Diffuser: glass
- Lamp holder: E27 (Max.40W Halogen/ 8W LED)
- Globes not included

E27 | IP44 Rated | 2 YEAR Replacement Warranty

Part No.	**MAGNUM1, MAGNUM2**
Description	WALL ES 40W S/M Cylinder + Flush Base
Material	Die cast aluminium
Lamp holder	1xE27 (Max.40W HAL/ 8W LED)
Dimensions	W 106 x H 216 x D 134mm
Back plate	L 100 x W 55 x D 35mm
Carton QTY	1/6



**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Torque Exterior Lighting






TORQUE1
(Matte White)



TORQUE2
(Matte Black)



- Exterior surface mounted wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: aluminium
- Diffuser: glass
- Lamp holder: E27 (Max.60W Halogen /8W LED)
- Globes not included

E27 | IP44 Rated | 3YEAR Replacement Warranty

Part No.	**TORQUE1, TORQUE2**
Description	WALL ES 60W Cone (Flat Top) + Flush Base
Material	Aluminium & glass
Lamp holder	1xE27 (Max.60W HAL/ 8W LED)
Dimensions	W 125 x H 178 x D 131mm
Back plate	L 100 x W 50 x D 15mm
Carton QTY	1/12



EXTERIOR

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*







TORQUE3 (GU10)
TORQUE4 (MR16)
(Antique Brass)



TORQUE5 (GU10)
TORQUE6 (MR16)
(Black)



TORQUE7 (GU10)
TORQUE8 (MR16)
(White)



TORQUE9 (GU10)
(Aged Brass)



- Exterior surface mounted GU10/MR16 cone wall lights
- Single fixed head
- Input voltage: GU10: 110-240V; MR16: 12-24V
- Housing: solid brass or aluminium
- Diffuser: clear glass
- Lamp holder: GU10 or MR16
- Globe not included
- MR16 fitting requires external 12V control gear

GU10 | MR16 | IP65 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Material	Colour	Base	Carton QTY
TORQUE3	WALL S/M GU10 CONE Antique Brass	Solid Brass	Antique Brass	GU10	1/20
TORQUE4	WALL S/M 12V MR16 CONE Antique Brass	Solid Brass	Antique Brass	MR16	1/20
TORQUE5	WALL S/M GU10 240V CONE Powder coated Black	Aluminium	Matte Black	GU10	1/20
TORQUE6	WALL S/M MR16 12V CONE Powder coated Black	Aluminium	Matte Black	MR16	1/20
TORQUE7	WALL S/M GU10 240V CONE Powder coated White	Aluminium	Matte White	GU10	1/20
TORQUE8	WALL S/M MR16 12V CONE Powder coated White	Aluminium	Matte White	MR16	1/20
TORQUE9	WALL S/M GU10 240V CONE Solid Aged Brass	Solid Brass	Aged Brass	GU10	1/20


To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

Banda Exterior Lighting LED Tri-CCT





4 Different Lengths are available



- Exterior LED Tri-CCT rectangular with frosted diffuser wall lights
- Input voltage: 180-240V
- Housing: Powder coated Aluminium
- Diffuser: Frosted Acrylic
- Mounting plate: iron
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- LED chips: 2835
- CRI: 80
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for use with 2-way switching
- Suitable for use with sensors

30,000hr Lifetime | 120^{0} Beam Angle | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Colour	Lumens			Watt	Dimensions	Base	Carton QTY
		3000K	4000K	5700K				
BANDA1	Black	200lm	220lm	210lm	9W	L300xW90xH45mm	L297xW52xD33mm	1/10
BANDA2	Black	340lm	380lm	350lm	18W	L570xW90xH45mm	L530xW52xD33mm	1/10
BANDA3	Black	790lm	860lm	810lm	32W	L1000xW90xH45mm	L960xW52xD33mm	1/5
BANDA4	Black	980lm	1060lm	1000lm	48W	L1450xW90xH45mm	L1410xW52xD33mm	1/5
BANDA5	White	610lm	670lm	620lm	9W	L300xW90xH45mm	L297xW52xD33mm	1/10
BANDA6	White	1260lm	1340lm	1280lm	18W	L570xW90xH45mm	L530xW52xD33mm	1/10
BANDA7	White	2220lm	2400lm	2240lm	32W	L1000xW90xH45mm	L960xW52xD33mm	1/5
BANDA8	White	3360lm	3620lm	3380lm	48W	L1450xW90xH45mm	L1410xW52xD33mm	1/5

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

Shadow Exterior Lighting LED Tri-CCT






SHADOWTRI1 / 3
(Black)




SHADOWTRI2 / 4
(White)

The SHADOWTRI surface mounted wall light is certified for safe use under Australian and New Zealand electrical safety standards (Cert. No. GMA-522003), meeting AS/NZS 60598.2.1:2014 Amd 2:2019 and AS/NZS 60598.1:2017 Amd 1 & 2 requirements for fixed general-purpose luminaires.

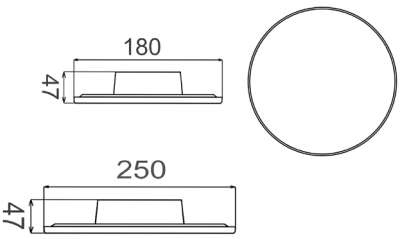

- Exterior LED Tri-CCT Round Backlit Wall Lights
- Input voltage: 220-240V 50Hz
- Constant Current LED driver inbuilt
- Housing: PC
- Diffuser: frosted PC
- Tri-CCT (3000K / 4200K / 6500K) in one fitting
- CCT switch on rear
- LED chips: 120pcs 2835
- CRI: 80
- Power factor: >0.5
- Ambient Temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for use with sensor





Part No.	Description	Lumens			Watt	Diameter	Back plate	Carton QTY
		3000K	4200K	6500K				
SHADOWTRI1	WALL S/M RND Blk LED Tri Backlit	1200lm	1300lm	1250lm	12W	Ø180mm	Ø100x33mm	1/20
SHADOWTRI2	WALL S/M RND WH LED Tri Backlit	1200lm	1300lm	1250lm	12W	Ø180mm	Ø100x33mm	1/20
SHADOWTRI3	WALL S/M RND Blk LED Tri Backlit	1800lm	1900lm	1850lm	18W	Ø250mm	Ø103.4x37mm	1/10
SHADOWTRI4	WALL S/M RND WH LED Tri Backlit	1800lm	1900lm	1850lm	18W	Ø250mm	Ø103.4x37mm	1/10

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

Cristal Exterior Lighting LED Tri-CCT






CRISTAL1
(Dark Grey)



CRISTAL2
(White)





- Exterior LED Tri-CCT curved square wall lights
- Input voltage: 100-240V 50/60Hz
- Inbuilt Constant Current LED driver
- Surface mounted
- Housing: Powder coated aluminium
- Heat sink: aluminium
- Mounting plate: PC
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- LED chips: 64pcs SMD2835
- CRI: >80
- Power factor: >0.8
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensor

30,000hr Lifetime | 115° Beam Angle | IP65 Rated | 3YEAR Replacement Warranty

Part No.	**CRISTAL1, CRISTAL2**
Description	WALL S/M 13W LED TRI IP65 Curved Square
Material	Aluminium & PC
Kelvin	3000K / 4000K / 6500K
Lumens	1031LM / 1111LM / 1095LM
Wattage	13W
LED chips	64PCS SMD2835
Power Factor	>0.8
CRI	>80
Product Dimensions	L180 x W180 x D51mm
Back Plate	98x98mm
Carton QTY	1/6

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

Giro Exterior Lighting LED Tri-CCT






GIROTRI1
(Dark grey)



GIROTRI2
(White)



- Exterior LED Tri-CCT up/down twist wall lights
- Input voltage: 100-240V 50/60Hz
- Inbuilt Constant Current Driver included
- Housing & heatsink: aluminium
- Diffuser: PC
- Back plate: aluminium
- LED chips: 8pcs 3030
- Tri-CCT(3000/ 4000/ 6500K) in one fitting
- CCT switch inside the fitting
- Power factor: >0.8
- 2 stickers included which allow narrowing of beam angle at both or either end
- Beam angle: without sticker is 117° and with the sticker is 68.9°
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

30,000hr Lifetime | IP65 Rated | 3YEAR Replacement Warranty



Part No.	Description	Lumens			Watt	CRI	Dimensions	Carton Qty
		3000K	4000K	6500K				
GIROTRI1	WALL Up/Dn LED TRI TWIST Dark Grey Alt Beam	907lm	1103lm	957lm	11W	>80	260x80x40mm	1/12
GIROTRI2	WALL Up/Dn LED TRI TWIST WH Alt Beam	907lm	1103lm	957lm	11W	>80	260x80x40mm	1/12

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.







GIROTRI3
(Dark grey)



GIROTRI4
(White)



- Input voltage: 100-240V 50/60Hz
- Inbuilt Constant Current Driver included
- Housing & heatsink: aluminium
- Diffuser: clear acrylic
- Back plate: aluminium
- LED chips: 8pcs 5050
- Tri-CCT(3000/ 4000/ 6500K) in one fitting
- CCT switch inside the fitting
- Power factor: 0.9
- **2 stickers included which allow narrowing of beam angle at both or either end**
- **Beam angle: without sticker is 85° and with the sticker is 65°**
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

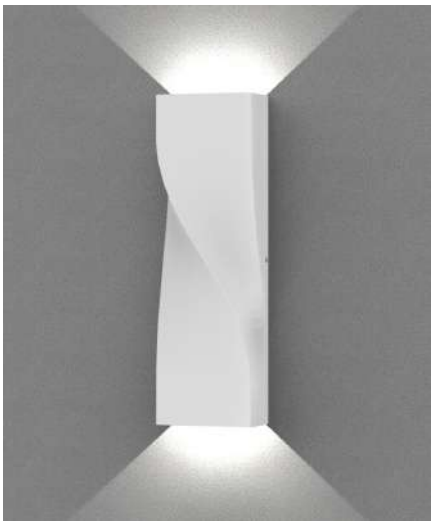

30,000hr Lifetime | IP65 Rated | 3YEAR Replacement Warranty

Part No.	Description	Lumens			Watt	CRI	Dimensions	Carton Qty
		3000K	4000K	6500K				
GIROTRI3	WALL Up/Dn LED TRI TWIST Dark Grey Alt Beam	1094lm	1242lm	1135lm	20W	>80	400x125x60mm	1/6
GIROTRI4	WALL Up/Dn LED TRI TWIST WH Alt Beam	1094lm	1242lm	1135lm	20W	>80	400x125x60mm	1/6

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

Bes Exterior Lighting

LED Tri-CCT







BESTRI1
(Dark Grey)



BESTRI2
(White)

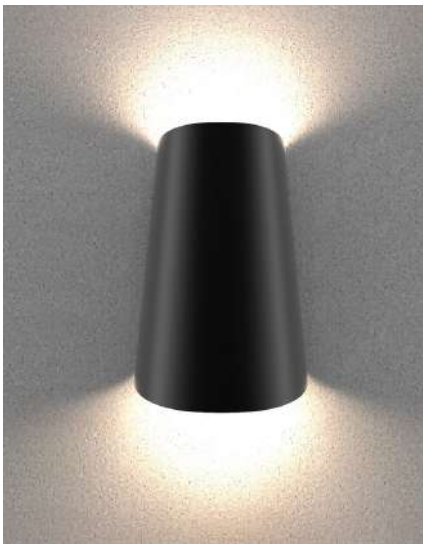



- Input voltage: 100-240V AC 50/60Hz
- Housing: powder coated aluminium
- Diffuser: clear acrylic
- Back plate: PC
- Tri-CCT (3000K / 4000K / 6500K) in one fitting
- LED chips: 4pcs 5050
- Power factor: 0.9
- Beam angle: 208.5^0 (bottom) / 144^0 (top)
- Ambient temp: -20 to 40^{0}C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

30,000hr Lifetime | IP65 Rated | 3YEAR Replacement Warranty

Part No.	BESTRI1, BESTRI2
Description	WALL S/M Up/Dn 11W LED Tri Cone Dark Grey / White
Material	Aluminium & PC
LED chips	4pcs 5050
Kelvin	3000K/ 4000K/ 6500K
Lumens	374LM/ 378LM/ 322LM
Wattage	11W
Power factor	0.9
CRI	>80
Beam angle	208^0 (Bottom) / 144^0 (Top)
Dimensions	Height: 174mm; Width of the TOP: 77mm; Depth of the TOP: 35mm; Width of the BOTTOM: 106mm; Depth of the BOTTOM: 51mm
Carton QTY	1/18

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Wig Exterior Lighting

LED Tri-CCT






WIG1
(Dark Grey)




WIG2
(White)

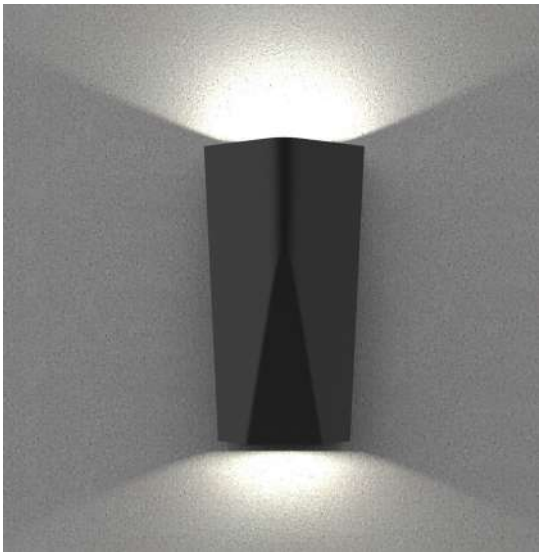

- Exterior LED Tri-CCTsurface mounted up/down wall lights
- Input voltage: 100-240V AC 50/60Hz
- Housing: powder coated aluminium
- Diffuser: clear acrylic
- Back plate: L17mm x W9mm
- LED chips: 8pcs 3030
- Tri-CCT (3000K / 4000K / 6500K) in one fitting
- CCT switch location: inside the fitting
- 2 stickers included which allow narrowing of beam angle at both or either end
- Beam angle: without sticker is 67.6^0 and with sticker is 63.6^0 or 65.1^0
- Ambient Temperature: -20 to 40^{0}C
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

30,000hr Lifetime | IP65 Rated | 3YEAR Replacement Warranty




Part No.	**WIGTRI1, WIGTRI2**
Description	WALL LED TRI S/M Wedge Up/ Dn IP65 + Flush Base
Material	Aluminium & acrylic
LED chips	8pcs 3030
Kelvin	3000K / 4000K / 6500K
Lumens	297LM / 351LM / 294LM
Wattage	11W
Power factor	0.9
CRI	>80
Dimensions	L106 x H200 x D62mm
Carton QTY	1/8

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Hak Exterior Lighting

LED Tri-CCT




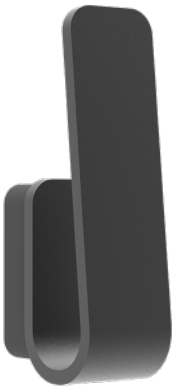

HAK1
(Dark Grey)



HAK2
(White)



- Exterior LED Tri-CCT surface mounted hook wall lights
- Input voltage: 100-240V 50/60Hz
- Inbuilt Constant Current LED driver
- Housing: Powder coated aluminium
- Heat sink: aluminium
- Mounting plate: PC
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- LED chips: 84pcs SMD2835
- CRI: >80
- Power factor: >0.8
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensor


Part No.	**HAK1, HAK2**
Description	WALL S/M 7W LED TRI Hook
Material	Aluminium & PC
Kelvin	3000K / 4000K / 6500K
Lumens	482LM / 534LM / 536LM
Wattage	7W
LED chips	84PCS SMD2835
Power Factor	>0.8
CRI	>80
Product Dimensions	L251 x W72 x D94mm
Back Plate	125x63mm
Carton QTY	1/8

30,000hr Lifetime | 102° Beam Angle | IP65 Rated | 3YEAR Replacement Warranty

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.


Repisa Exterior Lighting

LED Tri-CCT

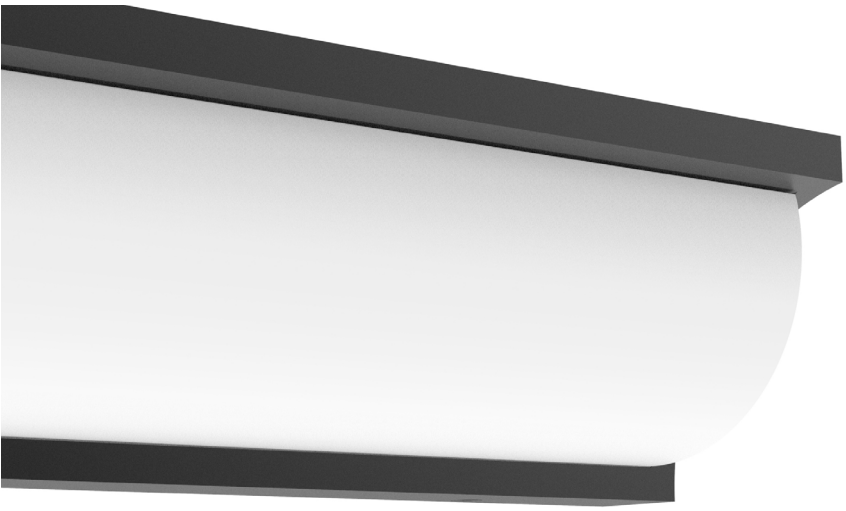




REPISATRI1
(Dark grey)

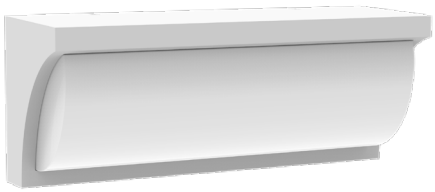

REPISATRI2
(White)

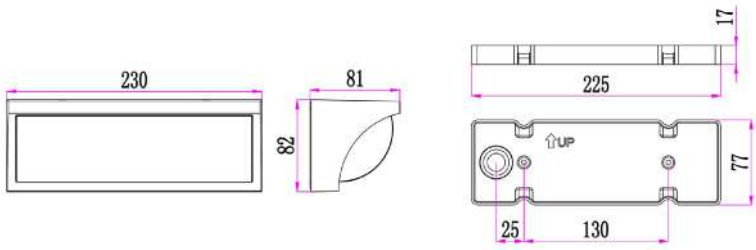


Back plate line drawing


- Exterior LED Tri-CCT surface mounted curved wedge wall lights
- Input voltage: 100-240V AC 50/60Hz
- Inbuilt Constant Current driver included
- Housing & heatsink: aluminium
- White diffuser: UV resistant PC
- Back plate: aluminium
- LED chips: 32pcs SMD2835
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR sensor

30,000hr Lifetime | 120° Beam Angle | IP65 Rated | 3YEAR Replacement Warranty


Part No.	**REPISATRI1, REPISATRI2**
Description	WALL LED S/M Dark Grey / WH Curved Wedge
Material	Aluminium & PC
Kelvin	3000K/ 4000K/ 6500K
Lumens	933LM/ 1040LM/ 1016LM
Wattage	13W
LED chips	32PCS SMD2835
Power factor	>0.8
CRI	>80
Dimensions	Please see line drawings
Back plate	225x77x17mm
Carton QTY	1/8

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

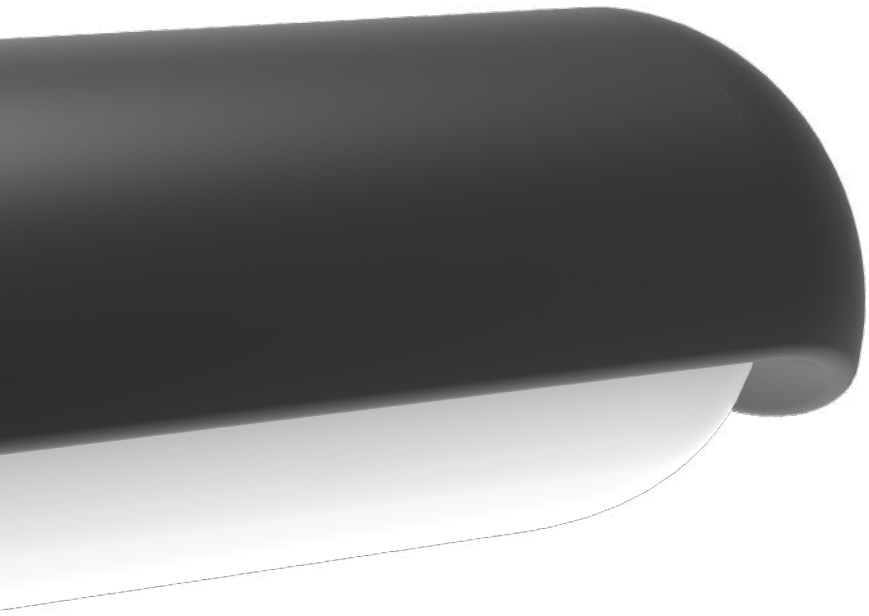

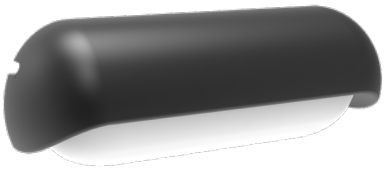


AKENTRI1
(Dark Grey)

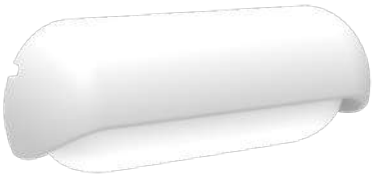

AKENTRI2
(White)

- Exterior LED surface mounted eyelid wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt Constant Current driver included
- Housing & heat sink: powder coated aluminium
- Diffuser & back plate: PC
- LED chips: 24pcs SMD2835
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside of the fitting
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

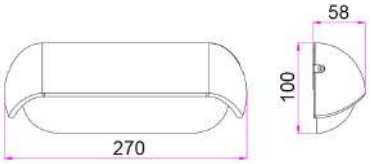



Part No.	AKENTRI1, AKENTRI2
Description	WALL S/M Rect LED Tri Eyelid Opal Diffuser
Material	Aluminium & PC
LED chips	24pcs SMD2835
Kelvin	3000K/ 4000K/ 6500K
Lumens	759LM/ 908LM/ 875LM
Wattage	13W
Power factor	>0.5
CRI	>80
Beam angle	111^0
Dimensions	L 270 x H 100 x D 58mm
Back plate	270x100mm
Carton QTY	1/8






**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Topa Exterior Lighting LED Tri-CCT



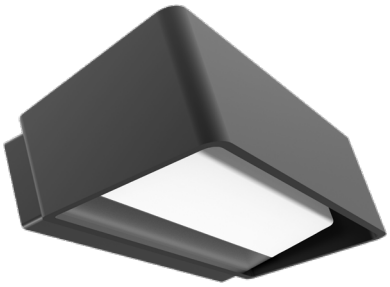


TOPATRI1
(Dark Grey)




TOPATRI2
(White)

- Exterior LED surface mounted wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt constant current driver included
- Housing & heatsink: aluminium
- Diffuser & back plate: PC
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- LED chips: 24pcs SMD2835
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors







Part No.	**TOPATRI1, TOPATRI2**
Description	WALL LED S/M RECT (RND) Up/Dn IP65 + RECT Base
Material	Aluminium & PC
LED chips	24pcs SMD2835
Kelvin	3000K/ 4000K/ 6500K
Lumens	678LM/ 796LM/ 776LM
Wattage	13W
Power factor	>0.8
CRI	>80
Beam angle	304°
Dimensions	L 248 x W 70 x D 117mm
Carton QTY	1/12

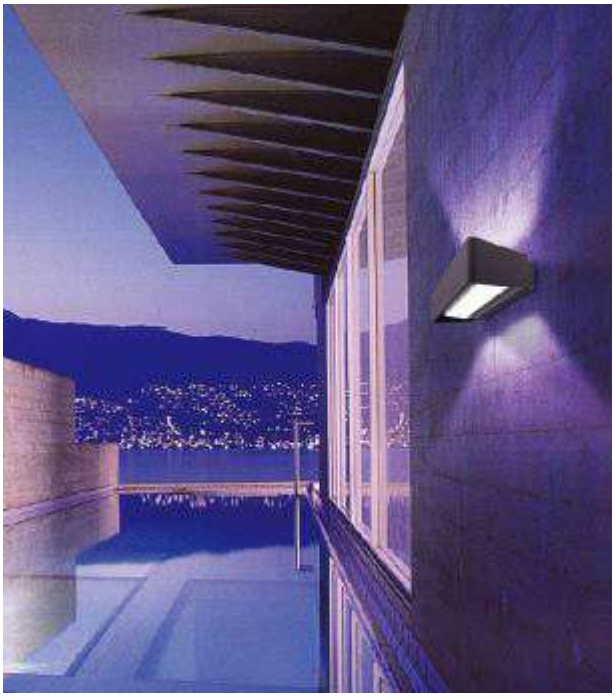


**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Plana Exterior Lighting LED

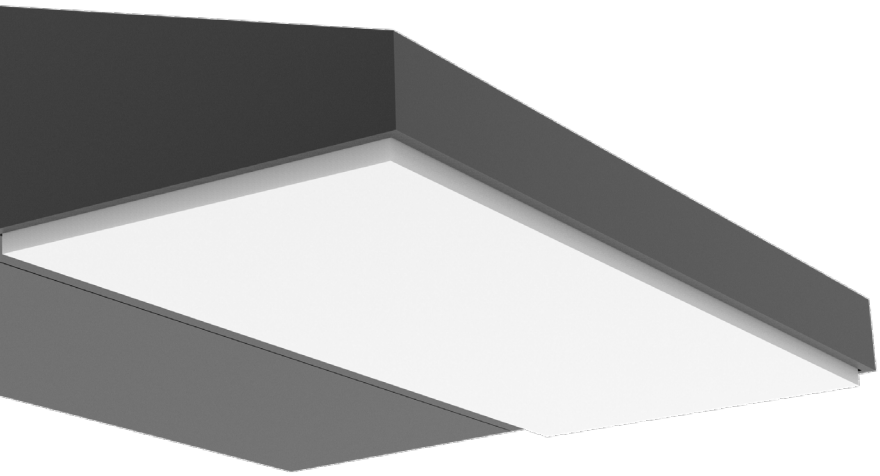


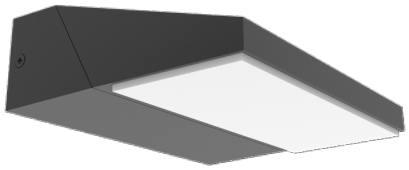


PLANA01
(Dark Grey)



PLANA02
(White)





Back plate



- Exterior LED adjustable surface mounted wall lights
- Input voltage: 100-240V AC 50/60Hz
- Inbuilt Constant Current driver included
- Housing & heatsink: aluminium
- Diffuser: UV resistant PC
- Back plate: aluminium
- Degree of Swivel: 180⁰
- LED chips: 12pcs 2835
- Ambient temperature: -20 to 50⁰C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR sensor



Part No.	**PLANA01, PLANA02**
Description	WALL LED S/M Wedge Swivel IP65 + RECT Base
Material	Aluminium & PC
LED chips	12pcs 2835
Kelvin	3000K
Lumens	650LM
Wattage	13W
Power factor	>0.9
CRI	>80
Beam angle	127⁰
Back plate	166x44x27mm
Carton QTY	1/8




**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Sombra Exterior Lighting *LED*







SOMBRA01
(Dark Grey)

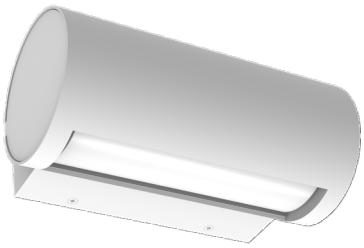

SOMBRA02
(White)

- Exterior LED adjustable eyelid surface mounted wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt Constant Current driver included
- Housing & heatsink: aluminium
- Diffuser: UV resistant PC
- Back plate: aluminium
- 180^0 adjustable cap
- LED chips: 12pcs 3030
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor

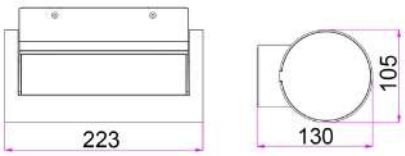



Back plate



Part No.	**SOMBRA01, SOMBRA02**
Description	WALL LED S/M Cylinder Rotating IP65 + RECT Base
Material	Aluminium & PC
LED chips	12pcs 3030
Kelvin	3000K
Lumens	380LM
Wattage	13W
Power factor	>0.9
CRI	>80
Dimensions	Please see the line drawing
Back plate	184x64x31mm
Carton QTY	1/8



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Bocina Exterior Lighting *LED*






BOCINA01
(Dark Grey)



BOCINA02
(White)

- Exterior LED surface mounted semicircle wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt Constant Current driver included
- Housing & heatsink: aluminium
- Diffuser: UV resistant PC
- Back plate: aluminium
- LED chips: 14pcs SMD2835
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR sensor



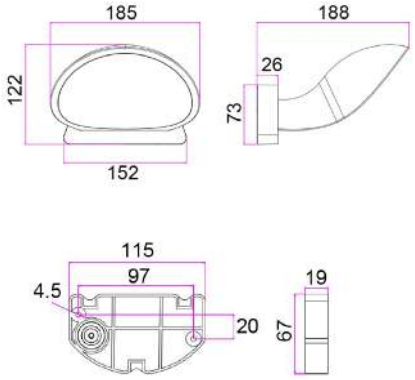

Back plate


Part No.	**BOCINA01, BOCINA02**
Description	WALL LED S/M Hood IP65 + Semi Circular Base
Material	Aluminium & PC
LED chips	14pcs SMD2835
Kelvin	3000K
Lumens	430LM
Wattage	10W
Power factor	>0.5
CRI	>80
Beam angle	116^0
Dimensions	Please see the line drawing
Back plate	115x67x19mm
Carton QTY	1/8




**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Apis Exterior Lighting *LED*



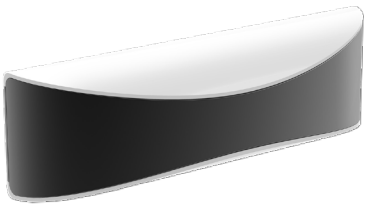


APIS1A
(Dark Grey)

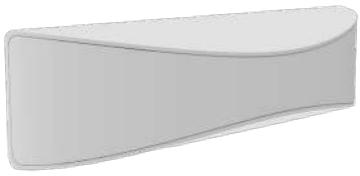

APIS2A
(White)

- Exterior LED surface mounted up/down wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: Powder coated aluminium
- Diffuser & mounting place: PC
- LED chips: 50pcs 2835
- Power factor: 0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors





Part No.	**APIS1A, APIS2A**
Description	WALL LED S/M Crescent (Reverse) Up/ Dn IP65 + Flush Base
Material	Aluminium & PC
LED chips	50pcs 2835
Kelvin	3000K
Lumens	350LM
Wattage	7W
Power factor	>0.8
CRI	>80
Beam angle	200^0
Dimensions	L 230 x W 72 x D 56mm
Back plate	230x72mm
Carton QTY	1/8




**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Aten Exterior Lighting LED






ATEN1
(Matte Black)

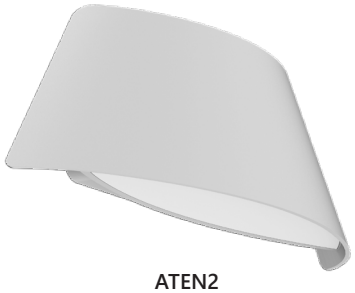


ATEN2
(Matte White)



- Exterior LED surface mounted up/down lights
- Input voltage range: 100-240V AC 50/60Hz
- Housing: aluminium
- Diffuser: PC
- Ambient temperature: -20 to 50^{0}C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors



Part No.	**ATEN1, ATEN2**
Description	WALL LED S/M Curved Up/Dn IP65 M/BLK + FLUSH Base 9W
Material	Aluminium & PC
LED chips	8pcs 3030
Kelvin	3000K
Lumens	531LM
Wattage	9W
Power factor	>0.5
CRI	>80
Beam angle	120^0
Dimensions	L 236 x W 75 x D 68mm
Back plate	135x50x8mm
Carton QTY	1/9

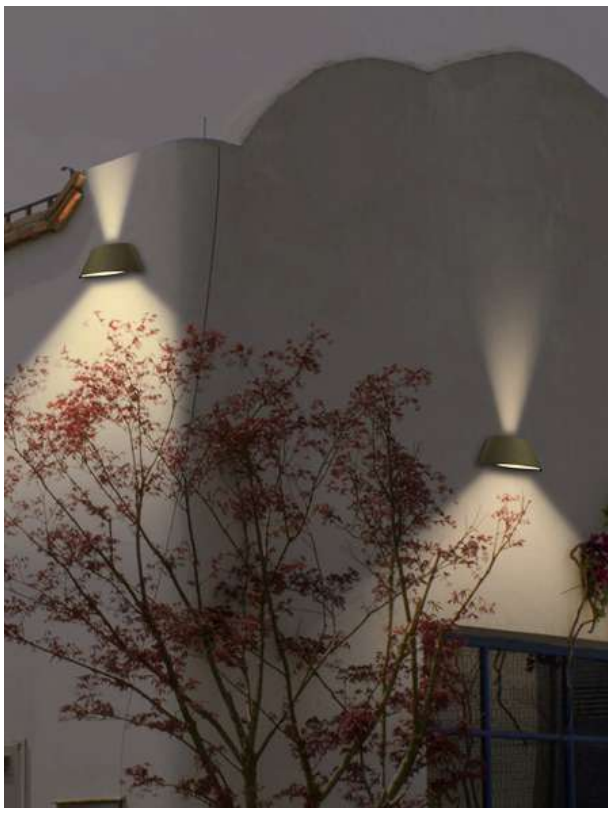

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Glans Exterior Lighting

LED







GLANS01 - Small
GLANS03 - Large
(Dark Grey)

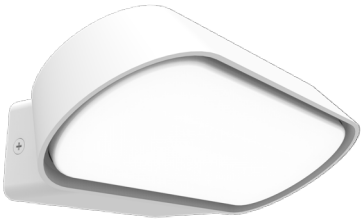

GLANS02 - Small
GLANS04 - Large
(White)



GLANS01-02

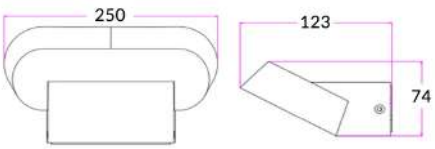

GLANS03-04

- Exterior LED surface mounted wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Output voltage: 13.5-22V
- Housing & heat sink: aluminium
- Mounting bracket & diffuser: PC
- LED chips: 6pcs or 12pcs 3030 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

30,000hr Lifetime | IP65 Rated | 3YEAR Replacement Warranty



Part No.	Description	Kelvin	Lumens	Watt	CRI	LED Chips	Beam Angle	Dimensions	Carton QTY
GLANS01	WALL LED Dark Grey 7W	3000K	180LM	7	80	6pcs 3030	111.6^0	180x65x114mm	1/8
GLANS02	WALL LED White 7W	3000K	180LM	7	80	6pcs 3030	111.6^0	180x65x114mm	1/8
GLANS03	WALL LED Dark Grey 13W	3000K	330LM	13	80	12pcs 3030	112.3^0	250x74x123mm	1/8
GLANS04	WALL LED White 13W	3000K	330LM	13	80	12pcs 3030	112.3^0	250x74x123mm	1/8

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Marina Exterior Lighting LED






MARINA1
(Dark Grey)



MARINA2
(White)

- Exterior LED surface mounted up/down wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Output voltage range: 13.5-22V DC
- Housing: aluminium
- Diffuser & bracket: PC
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors






Part No.	MARINA1, MARINA2
Description	WALL LED S/M Oval Up/Dn IP65 + Flush Base
Material	Aluminium & PC
LED chips	6pcs 3030
Kelvin	3000K
Lumens	380LM
Wattage	7W
Power factor	>0.5
CRI	80
Beam angle	173^0
Dimensions	L 185 x W 63 x D 88mm
Back plate	92.5x50.5mm
Carton QTY	1/8




**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Heka Exterior Lighting LED

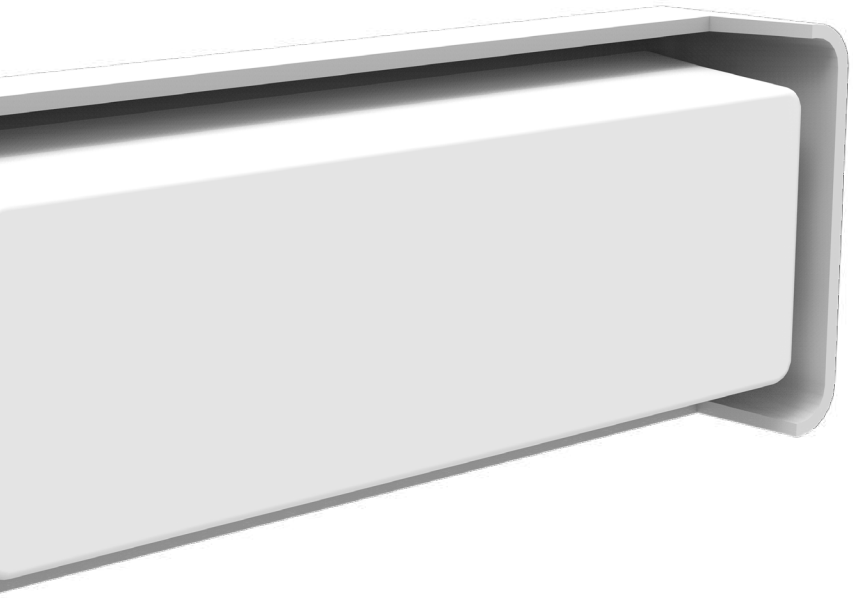




HEKA1
(Dark Grey)

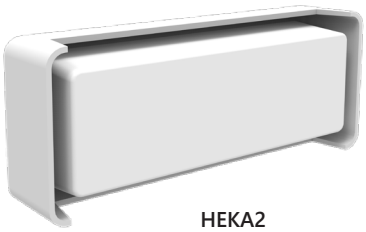

HEKA2
(White)

- Exterior LED surface mounted wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt constant current driver included
- Housing & heatsink: aluminium
- Diffuser & back plate: PC
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors






Part No.	**HEKA1, HEKA2**
Description	WALL LED S/M RECT 3 Way IP65 + Flush Base
Material	Powder coated aluminium & PC
LED chips	12pcs 3030
Kelvin	3000K
Lumens	732.94LM
Wattage	13W
Power factor	>0.5
CRI	>80
Beam angle	120°
Dimensions	L 226 x W 96 x D 64.5mm
Back plate	197x65mm
Carton QTY	1/8



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Kuk Exterior Lighting

LED

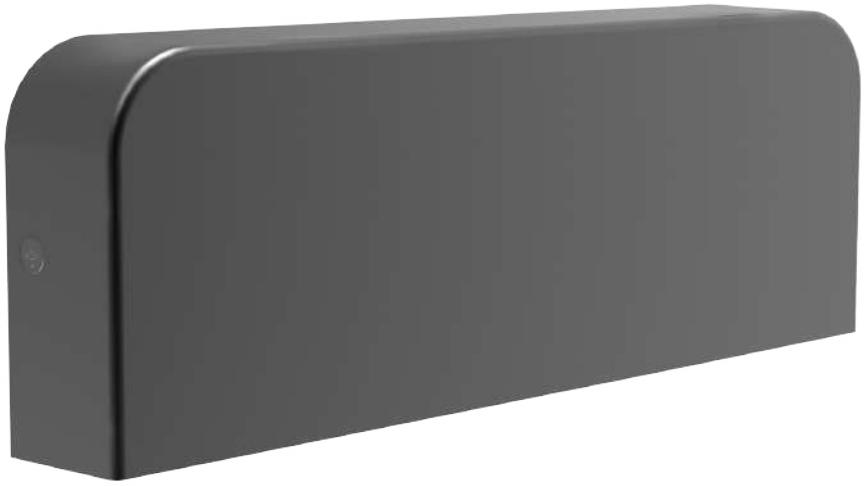




KUK1
(Dark Grey)



KUK2
(White)

- Exterior LED surface mounted wall lights
- Input voltage range: 100-240V 50/60Hz
- Shade & heatsink: aluminium
- Diffuser & bracket: PC
- Shade internal colour: white
- LED chips: 50pcs 2835
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors



30,000hr Lifetime | 120^0 Beam Angle | IP54 Rated | 3YEAR Replacement Warranty


Part No.	**KUK1, KUK2**
Description	WALL LED S/M RECT (RND) IP54 + Flush Base
Material	Aluminium & PC
LED chips	50pcs 2835
Kelvin	3000K
Lumens	670LM
Wattage	10W
Power factor	>0.5
CRI	>80
Beam angle	120^0
Dimensions	L 230 x W 80 x D 33mm
Back plate	220x70mm
Carton QTY	1/12



**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Ola Exterior Lighting

LED

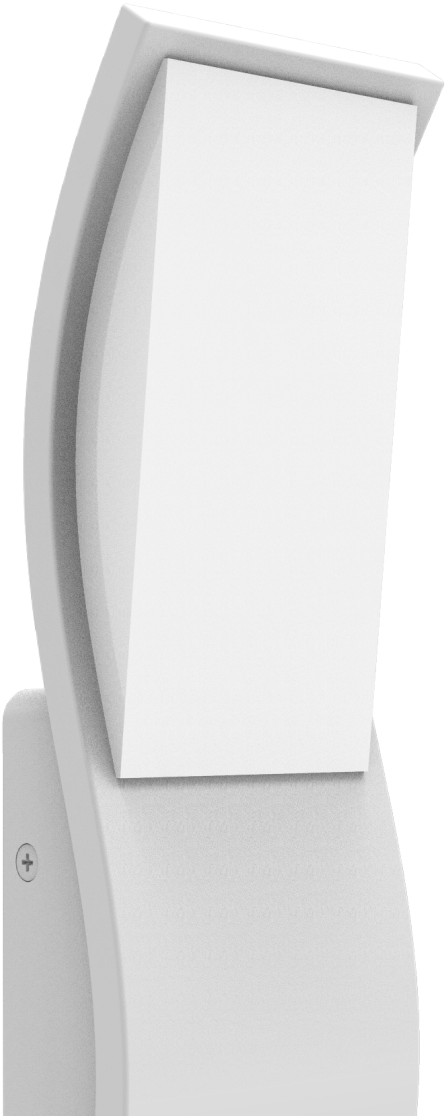





OLA01
(Dark Grey)



OLA02
(White)





Back plate

- Exterior LED surface mounted wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt Constant Current driver included
- Housing & heatsink: aluminium
- White diffuser: UV resistant PC
- Back plate: aluminium
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR sensor




Part No.	**OLA01, OLA02**
Description	WALL LED S/M RECT (Wavy) IP65 + RECT Base
Material	Aluminium & PC
LED chips	48pcs 2835
Kelvin	3000K
Lumens	509LM
Wattage	7W
Power factor	>0.8
CRI	>80
Back plate	130x63x31mm
Carton QTY	1/12

EXTERIOR


**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Toca Exterior Lighting LED

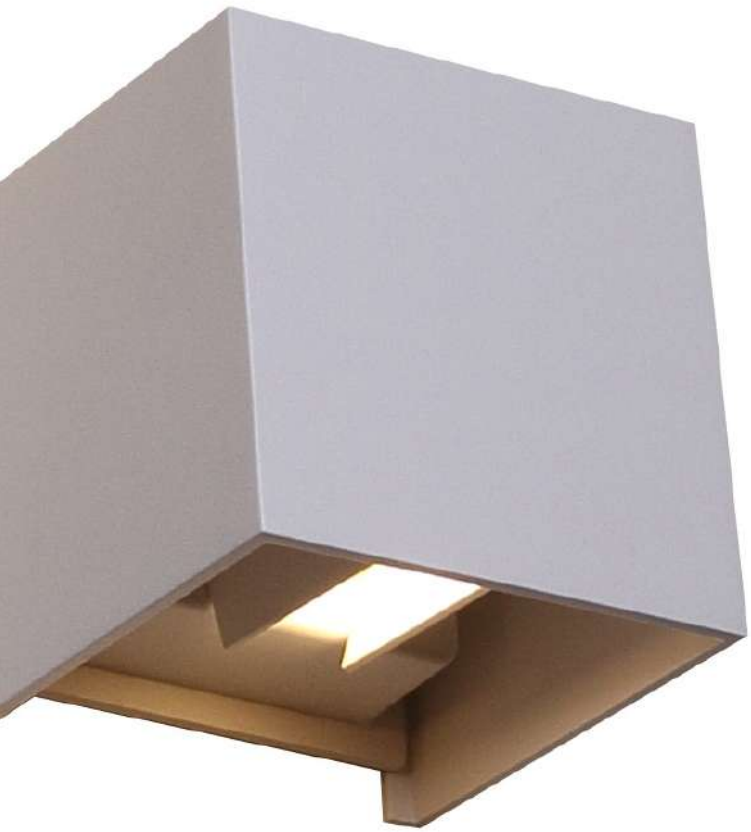



TOCA1
(Black)






TOCA2
(White)

- Exterior LED surface mounted up/down wall lights
- With adjustable beam angle
- Input voltage range: 220-240V AC 50/60Hz
- Material: aluminium
- LED chips: 18pcs SMD2835
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

30,000hr Lifetime | 120^0 Beam Angle | IP54 Rated | 2YEAR Replacement Warranty

Adjustable beam angle:

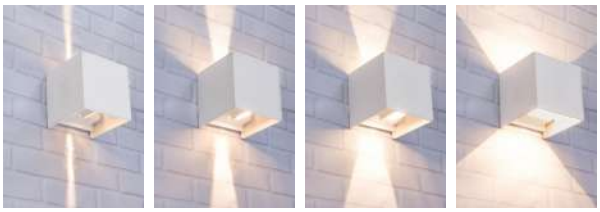



Part No.	**TOCA1, TOCA2**
Description	WALL LED S/M Cube Up/Dn with Adjustable Lens Covers IP54 + Flush Base
Material	Aluminium
LED chips	18pcs SMD2835
Kelvin	3000K
Lumens	408LM
Wattage	6.8W
Power factor	≥0.5
CRI	80
Dimensions	L 100 x W 100 x D 100mm
Carton QTY	1/12

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






TOCA3
(Matte Black)



TOCA4
(Matte White)

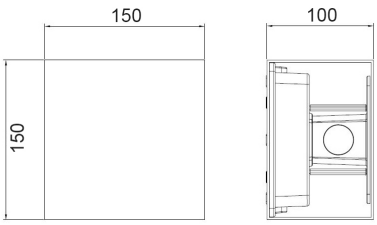



- Exterior LED surface mounted up/down lights
- With adjustable lens covers
- Input voltage range: 200-240V
- Inbuilt driver
- Housing: powder coated aluminium
- Diffuser: frosted glass
- Mounting plate: aluminium
- LED chips: 2pcs COB
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with Microwave or PIR sensors



Part No.	**TOCA3, TOCA4**
Description	WALL LED S/M Cube Up/Dn with Adjustable Lens Covers IP65 Flush Base
Material	Aluminium & glass
LED chips	2pcs COB
Kelvin	3000K
Lumens	940LM
Wattage	20W
Power factor	0.9
CRI	80
Beam angle	120^0
Dimensions	L 150 x W 150 x D 100mm
Back plate	W 130 x H 110mm
Carton QTY	1/6

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Remo Exterior Lighting LED






REMO1
(Black)



REMO2
(White)



- Exterior LED surface mounted up/down wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Shade & bracket: aluminium
- Diffuser: PC
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors




Part No.	**REMO1, REMO2**
Description	WALL LED S/M RECT (RND) Up/Dn IP54 + Flush Base
Material	Aluminium & PC
LED chips	18pcs 2835
Kelvin	3000K
Lumens	500LM
Wattage	6.8W
Power factor	>0.5
CRI	80
Back plate	84x51mm
Carton QTY	1/24

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Vox Exterior Lighting

LED







VOX1
(Black)



VOX2
(White)



VOX3
(Polished Aluminium)

- Exterior LED surface mounted up/down wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Output voltage range: 5.5-30V
- Housing & bracket: aluminium
- Ambient temperature: -20 to 45^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors



Part No.	**VOX1, VOX2, VOX3**
Description	WALL LED S/M Squircle Up/Dn IP54 Flush Base
Material	Aluminium
LED chips	32pcs SMD2835
Kelvin	3000K
Lumens	VOX1-2: 808LM; VOX3: 737LM
Wattage	9W
Power factor	>0.5
CRI	80
Beam angle	120^0
Dimensions	L 130 x W 130 x D 30mm
Back plate	130x130mm
Carton QTY	1/8


**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Tama Exterior Lighting LED





TAMA1
(Black)





TAMA2
(White)

- Exterior LED surface mounted up/down wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Shade & bracket: aluminium
- Diffuser: PC
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors




Part No.	**TAMA1, TAMA2**
Description	WALL LED S/M RECT (RND) Up/Dn IP54 + Flush Base
Material	Aluminium & PC
LED chips	18pcs 2835
Kelvin	3000K
Lumens	605LM
Wattage	6.8W
Power factor	>0.5
CRI	80
Back plate	92.5x50.5mm
Carton QTY	1/24

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Wedge Exterior Lighting







WEDGEGBL
(SS 316 Powder Coated Black)



WEDGEGC
(Copper)



WEDGEGSS
(SS 316)



WEDGEGWH
(SS 316 Powder Coated White)

- Exterior surface mounted wall wedge lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: 316 stainless steel & copper
- Diffuser: glass
- Lamp holder: GU10 (Max. 35W)
- Globes not included

GU10 | IP44 Rated | 2 YEAR Replacement Warranty


Part No.	**WEDGEGBL, WEDGEGC, WEDGEGSS, WEDGEGWH**
Description	WALL S/M Wedge IP44 + Flush Base
Material	SS 316 / Copper
Lamp holder	1xGU10 (Max.35W)
Dimensions	L 143 x W 70 x D 75mm
Back plate	143x70mm
Carton QTY	1/20




EXTERIOR

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Ned Exterior Lighting

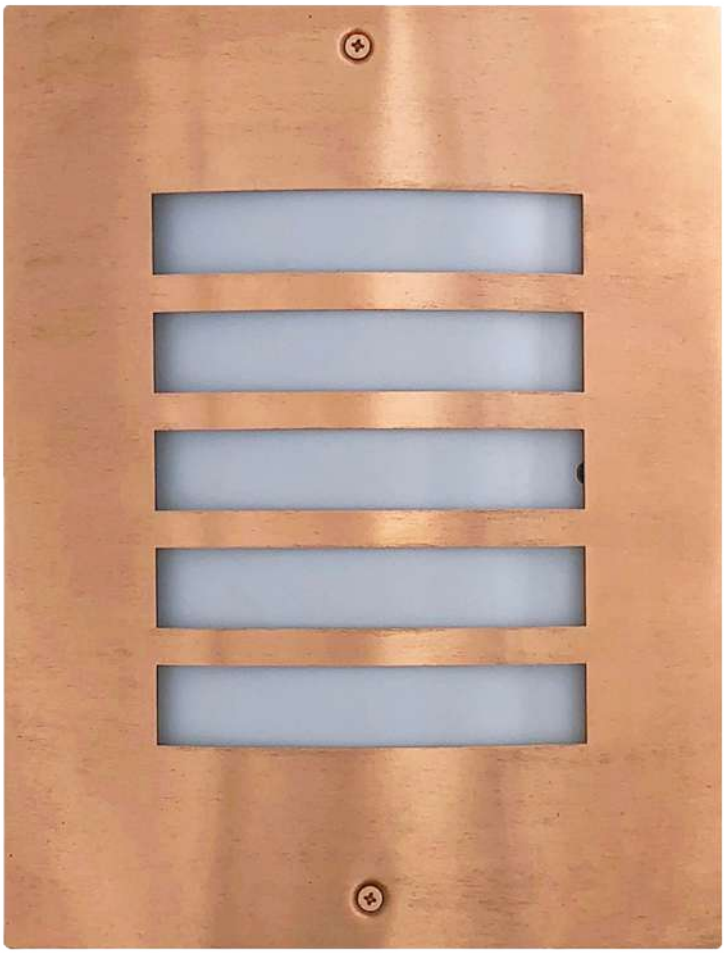





NED01
(Solid Copper)



NED02
(316 Stainless Steel)



- Exterior surface mounted wall lights
- Input voltage range: 110-265V AC 50/60Hz
- Faceplate: 316 stainless steel or solid copper
- Housing & Diffuser: PC
- Lamp holder: 1xE27 (Max.60W)
- Globes not included




Part No.	**NED01, NED02**
Description	WALL ES 60W S/M RECT with Grill IP54 Flush Base
Material	Faceplate: Copper/ 316 SS Housing & diffuser: PC
Lamp holder	1xE27 (Max.60W)
Dimensions	W 220 x L 280mm
Carton QTY	1/10




**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Oga Exterior Lighting

LED Tri-CCT

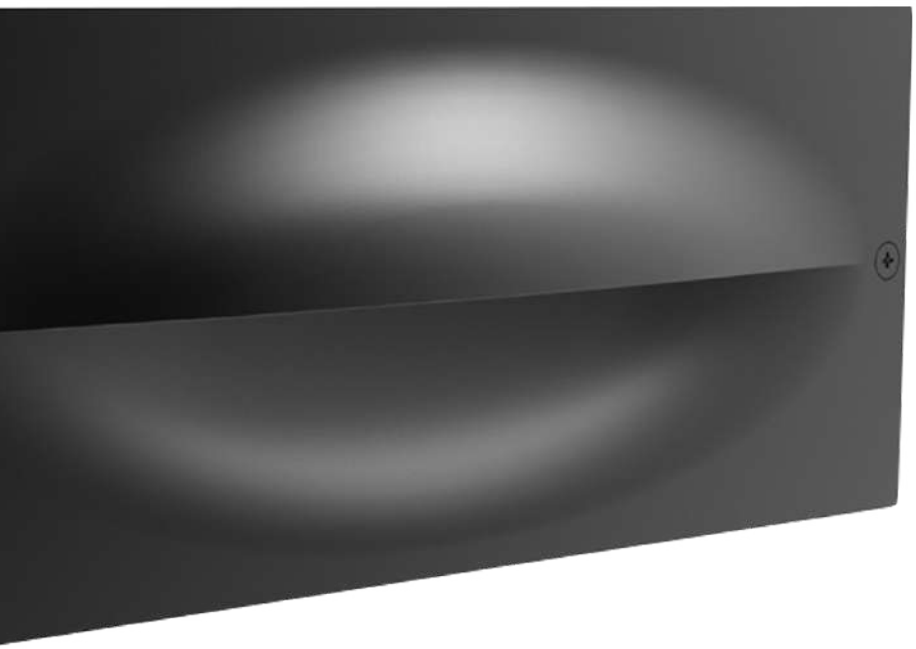

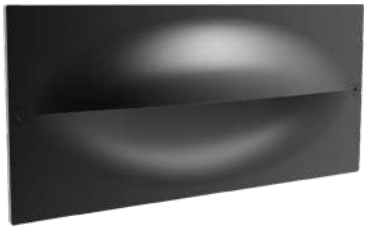


OGATRI1
(Dark Grey)

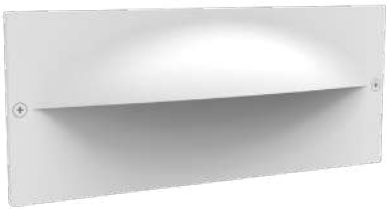

OGATRI2
(White)


- Exterior LED recessed wall lights
- Input voltage range: 100-240V AC50/60Hz
- Internal constant current driver included
- Housing & heatsink: aluminium
- Bracket: PC
- LED chips: 24pcs 2835 LED
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

30,000hr Lifetime | 66° Beam Angle | IP65 Rated | 3YEAR Replacement Warranty

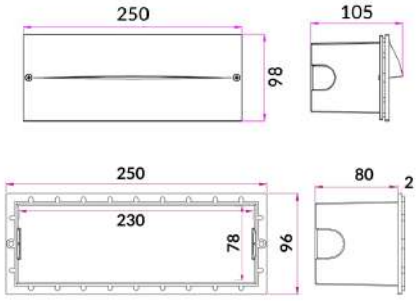

Sleeve line drawing


Part No.	OGATRI1, OGATRI2
Description	WALL LED RECT Eyelid IP65 + Sleeve
Material	Aluminium
Kelvin	3000K/ 4000K/ 6500K
Lumens	670LM/ 561LM/ 349LM
Wattage	13W
LED Chips	24pcs 2835
Power factor	>0.8
CRI	>80
Dimensions	L 250 x W 98 x D 105mm
Cut out	230x78mm
Carton QTY	1/8

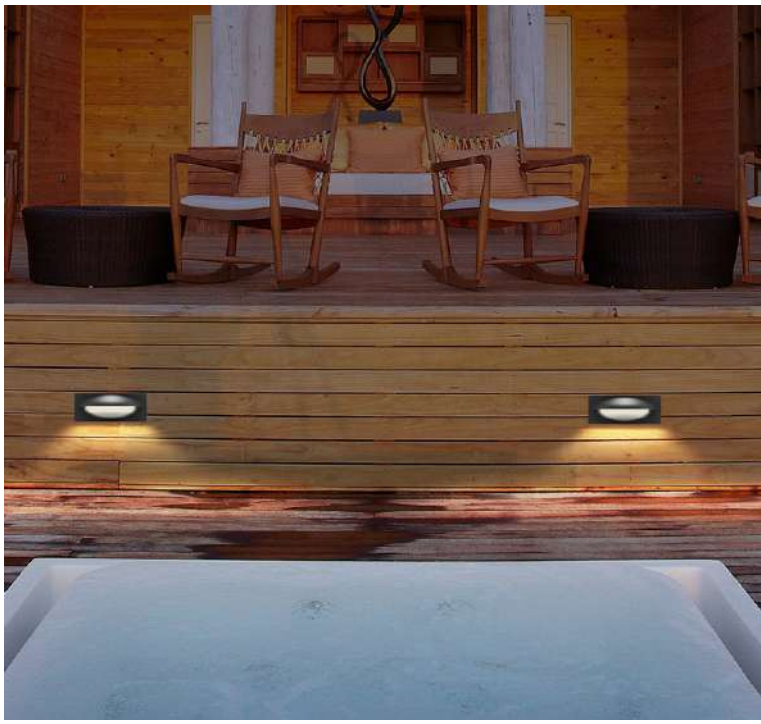

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Brick Exterior Lighting

LED Tri-CCT

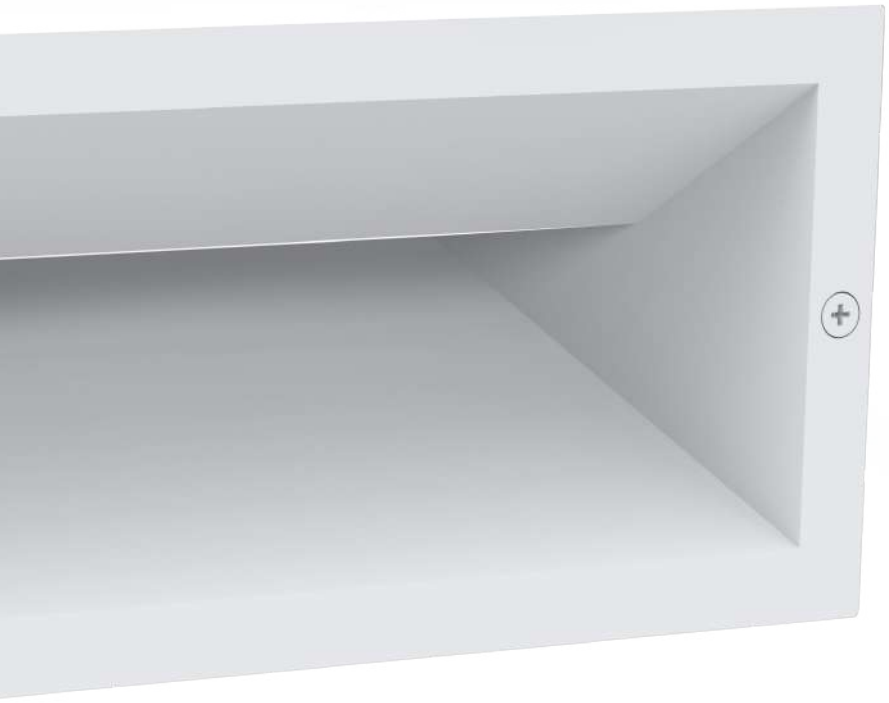




BRICKTRI1
(Dark Grey)

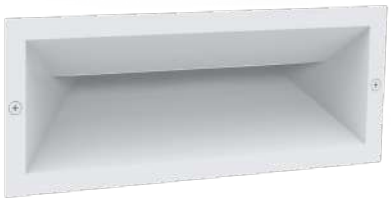


BRICKTRI2
(White)

- Exterior LED recessed wall lights
- Input voltage range: 100-240V AC 50/60Hz
- Internal constant current driver included
- Housing & heatsink: aluminium
- Sleeve & diffuser: PC
- LED chips: 24pcs 2835
- Beam angle: please see below
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

30,000hr Lifetime | IP65 Rated | 3YEAR Replacement Warranty






Sleeve line drawing

Part No.	**BRICKTRI1, BRICKTRI2**
Description	WALL LED RECD RECT Eyelid IP65 + Sleeve
Material	Aluminium & PC
LED chips	24pcs 2835
Kelvin	3000K/ 4000K/ 6500K
Lumens	267LM/ 305LM/ 297LM
Wattage	13W
Power factor	>0.8
CRI	>80
Beam angle	67^0
Dimensions	L250 x W98 x D90mm
Cut out	L227 x W76 x D78mm
Carton QTY	1/8




**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*




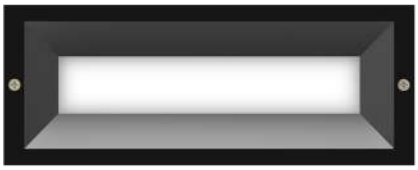

BRICKTRI3
(Dark Grey)

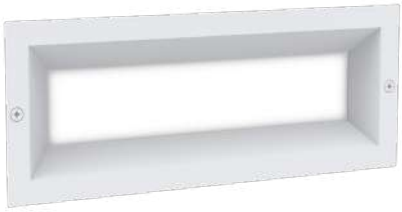

BRICKTRI4
(White)

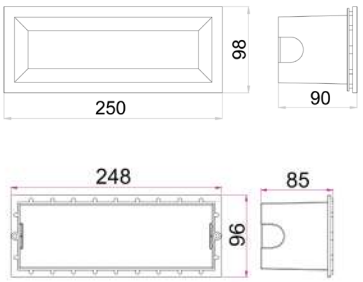

Sleeve line drawing

Part No.	**BRICKTRI3, BRICKTRI4**
Description	WALL LED RECD RECT IP65 + Sleeve
Material	Aluminium & PC
LED chips	24pcs 2835
Kelvin	3000K/ 4000K/ 6500K
Lumens	587LM/ 639LM/ 584LM
Wattage	13W
Power factor	>0.8
CRI	>80
Beam angle	108^0
Dimensions	L250 x W98 x D90mm
Cut out	L227 x W76 x D78mm
Carton QTY	1/8



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Bulk Exterior Lighting LED







BULK1



BULK2A



- Exterior LED bulkhead lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: polycarbonate
- Frosted diffuser & back plate: PC
- LED chips: SMD2835
- Ambient temperature: -20 to 45^{0}C
- Double insulated
- IK10 impact rating for Vandal resistance
- Large terminal holes for easy connection
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors




Part No.	**BULK1, BULK2A**
Description	BULKHEAD/ WALL LED AC RND IP66 IK10 + Flush Base
Material	Polycarbonate
Kelvin	4000K
Lumens	800LM
Wattage	12W
LED Chips	63pcs SMD2835
Power factor	>0.8
CRI	>80
Dimensions	Ø300 x D 90mm
Carton QTY	1/8



To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.


Part No.	**BULK3**
Description	BULKHEAD/ WALL LED AC Oval IP66 IK10 BLK + Flush Base
Material	Polycarbonate
Kelvin	4000K
Lumens	800LM
Wattage	12W
LED Chips	63pcs SMD2835
Power factor	≥0.5
CRI	>80
Dimensions	W 230 x L 330 x D 90mm
Carton QTY	1/8





BULK3

Part No.	**BULK7A**
Description	BULKHEAD/ WALL LED AC RND Eyelid IP66 IK10 + Flush Base
Material	Polycarbonate
Kelvin	4000K
Lumens	500LM
Wattage	12W
LED Chips	63pcs SMD2835
Power factor	>0.8
CRI	>80
Dimensions	Ø300 x D 90mm
Carton QTY	1/8





BULK7A



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






BULK9
(White)



BULK10
(Black)



- Exterior LED bulkhead letter box lights
- Input voltage range: 100-240V AC 50-60Hz
- Internal LED driver
- Shade: aluminium
- Diffuser & back plate: PC
- LED chips: SMD2835
- Power factor: >0.5
- Ambient temperature: -20 to 45^{0}C
- IK10 impact rating for Vandal resistance
- The number stickers are included in the packaging



Part No.	**BULK9, BULK10**
Description	BULKHEAD / WALL / Letterbox RECT Eyelid IP65 IK10 + Flush Base
Material	Die cast aluminium & PC
Kelvin	3000K
Lumens	770LM
Wattage	12W
LED Chips	SMD2835
Power factor	>0.5
CRI	>80
Dimensions	W 161 x L 211 x D 60mm
Carton QTY	1/12



**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





BULK11 & BULK12
(Black)





BULK13 & BULK14
(White)





***Optional cage/ Guard removed**





- Exterior LED bulkhead lights
- Input voltage range: 190-250V AC 50/60Hz
- Inbuilt LED driver included
- Housing: PC
- Frosted diffuser: PC
- Screw & mounting bracket: iron
- LED chips: 45pcs 2835
- Power factor: ≥0.9
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR and Microwave sensor
- Optional cage/guard included





Part No.	Description	Kelvin	Lumens	Watt	CRI	Power Factor	Dimensions	Carton QTY
BULK11	BULKHEAD / WALL LED BLK OVAL (with opt cage)	3000K	1600LM	20W	80	≥0.9	275x150x79mm	1/8
BULK12	BULKHEAD / WALL LED BLK OVAL (with opt cage)	5000K	1700LM	20W	80	≥0.9	275x150x79mm	1/8
BULK13	BULKHEAD / WALL LED WH OVAL (with opt cage)	3000K	1600LM	20W	80	≥0.9	275x150x79mm	1/8
BULK14	BULKHEAD / WALL LED WH OVAL (with opt cage)	5000K	1700LM	20W	80	≥0.9	275x150x79mm	1/8

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






BULK15 & BULK17
(Black)



BULK16 & BULK18
(White)



Back plate



- Exterior LED Eyelid bulkhead lights
- Input voltage range: 180-250V AC 50/60Hz
- Inbuilt constant current driver included
- Material: PC
- Bracket: iron
- Flex: 150mm
- LED chips: 30pcs 2835
- Power factor: ≥0.9
- Ambient temperature: -20 to 40^{0}C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors






Part No.	Description	Kelvin	Lumens	Watt	CRI	Power Factor	Dimensions	Carton QTY
BULK15	BULKHEAD / WALL LED BLK RND Eyelid	3000K	1600LM	20W	80	≥0.9	Ø225x73mm	1/10
BULK16	BULKHEAD / WALL LED WH RND Eyelid	3000K	1600LM	20W	80	≥0.9	Ø225x73mm	1/10
BULK17	BULKHEAD / WALL LED BLK RND Eyelid	5000K	1600LM	20W	80	≥0.9	Ø225x73mm	1/10
BULK18	BULKHEAD / WALL LED WH RND Eyelid	5000K	1600LM	20W	80	≥0.9	Ø225x73mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





CLA4736CB

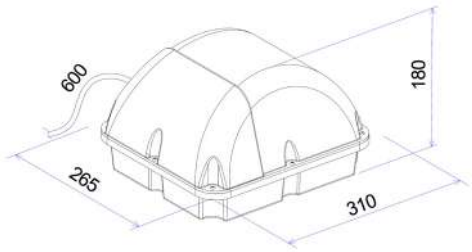

- Exterior LED bulkhead light
- Input voltage range: 220-240V AC
- Housing: powder coated aluminium
- Diffuser: clear PC
- Mounting plate & heatsink: aluminium
- LED chip: 1pc COB
- Flex: 0.6m
- Ambient temperature: -20 to 45^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors



Part No.	**CLA4736CB**
Description	BULKHEAD / WALL LED AC RECT Eyelid IP65 IK10 BLK + Flush Base
Material	Aluminium & PC
Kelvin	5000K
Lumens	1900LM
Wattage	20W
LED Chips	1PC COB
Power factor	0.9
CRI	≥70
Dimensions	L 310 x W 265 x D 180mm
Mounting plate	L 300 x W 265mm
Carton QTY	1/1

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Oys Oyster Lights

LED Tri-CCT














- LED Tri-CCT dimmable oyster lights
- Input voltage: 220-240V 50Hz
- Inbuilt LED driver
- Housing: PP
- Diffuser: frosted PS
- Heat sink: PCB + aluminium
- Tri-CCT (3000K / 4000K / 6500K) in one fitting
- CCT switch by dip switch inside the fitting
- LED chips: 2835
- CRI: 80
- Power factor: >0.9
- Ambient temperature: -20 to 45^{0}C
- Suitable for dimming, suitable for use with most dimmers
- Suitable for use with 2-way switching
- Suitable for use with sensors



OYSTRI1



OYSTRI2



Tested and recommended dimmers:

Brand	Part No.
CLA	VELA, LYNX
HPM	Cat250T, Cat400T
Clipsal	32E450UDM, 31E2PUDM, 32ELEDDM-WE, 32E450TM, PDL354PBDMUN-VW
Diginet	MEDM, MMDM/RT



Part No.	Description	Lumens			Watt	CRI	PF	Carton QTY
		3000K	4000K	6500K				
OYSTRI1	OYSTER Slim LED Dimm RND Wh 24W Tri IP54	1800lm	1900lm	1850lm	24W	80	>0.6	1/10
OYSTRI2	OYSTER Slim LED Dimm RND Wh 36W Tri IP54	2800lm	2900lm	2850lm	36W	80	>0.9	1/10

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Oysdim Exterior Lighting

LED Tri-CCT






OYSDIM001-002




Tri-CCT Switch on Rear

- Waterproof LED Tri-CCT dimmable oyster lights
- Input voltage range: 200-240V AC 50/60Hz
- Inbuilt driver output voltage range: 60-80V
- Material: PC
- Tri-CCT: 3000K/ 4000K/ 5000K in one fitting
- LED chips: SMD2835
- Power factor: >0.9
- CRI: 80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or microwave sensors
- Suitable for indoor & outdoor use
- Changes to appearance due to climatic conditions not covered under warranty





OYSDIM001



OYSDIM002

Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32ELEDM, 31E2PUDM, 32E450T, 31E450UDM
HPM	CAT250L

Part No.	Lumens			Watt	CRI	Diam	Depth	Back Plate	Carton QTY
	3000K	4000K	5000K						
OYSDIM001	1200LM	1300LM	1250LM	15W	80	Ø200mm	48mm	Ø175mm	1/20
OYSDIM002	2000LM	2200LM	2100LM	24W	80	Ø300mm	40mm	Ø270mm	1/12

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Ulan Exterior Lighting *LED*






ULAN1
(Dark Grey)



ULAN2
(White)

- Exterior LED surface mounted wall/ceiling lights
- Input voltage range: 220-240V AC 50/60Hz
- Output voltage range: 225-245V
- Onboard inbuilt driver
- Housing: powder coated aluminium
- Diffuser & bracket: PC
- LED chip: 25pcs 2835
- Power factor: >0.9
- Ambient temperature: -20 to 50°C
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors



30,000hr Lifetime | 122.4° Beam Angle | IP65 Rated | 3YEAR Replacement Warranty





Part No.	**ULAN1, ULAN2**
Description	WALL / CEILING LED S/M Squircle IP65 Flush Base
Material	Powder coated aluminium & PC
Kelvin	3000K
Lumens	980LM
Wattage	20W
LED Chips	25pcs 2835
Power factor	>0.9
CRI	80
Dimensions	251 x 251 x 55mm
Carton QTY	1/4

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Doccia Exterior Lighting LED






DOCCIA1
(Dark Grey)



DOCCIA2
(White)

- Exterior LED surface mounted wall/ceiling lights
- Input voltage range: 220-240V AC 50/60Hz
- Output voltage range: 225-245V AC
- **Onboard inbuilt driver included**
- Housing: powder coated aluminium
- Diffuser & bracket: PC
- LED chip: 28pcs 2835
- Power factor: >0.9
- Ambient temperature: -20 to 50^{0}C
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors



30,000hr Lifetime | 105.8^{0} Beam Angle | IP65 Rated | 3YEAR Replacement Warranty

Part No.	DOCCIA1, DOCCIA2
Description	WALL / CEILING LED S/M Squircle IP65 Flush Base
Material	Powder coated aluminium & PC
Kelvin	3000K
Lumens	920LM
Wattage	20W
LED Chips	28pcs 2835
Power factor	>0.9
CRI	80
Dimensions	L 250 x W 250 x D 60mm
Carton QTY	1/4




**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





STE3-4
(Black Aluminium)





- Exterior LED surface mounted eyelid step lights
- Input voltage range: 12-14V DC / 220-240V AC
- Housing: Die cast aluminium
- Polished finish
- LED chips: 18pcs 2835
- 12V fitting requires external control gear (DC drivers only)



Part No.	Description	Kelvin	Lumens	Watt	CRI	Power Factor	Dimensions	Back Plate	Carton QTY
STE3	STEP EYELID LED 12V DC S/M BLK RND	3000K	144LM	1W	>70	1.0	Ø104x50mm	Ø104mm	1/50
STE4	STEP EYELID LED 240V S/M BLK RND	3000K	144LM	1W	>70	>0.3	Ø104x50mm	Ø104mm	1/50

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






STE5
(Matte White)



STE6
(Matte Black)


- Exterior LED recessed step lights
- Input voltage range: 100-240V AC 50/60Hz
- Housing: aluminium
- Diffuser: PC
- Bracket: aluminium
- LED chips: 6pcs 3030
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

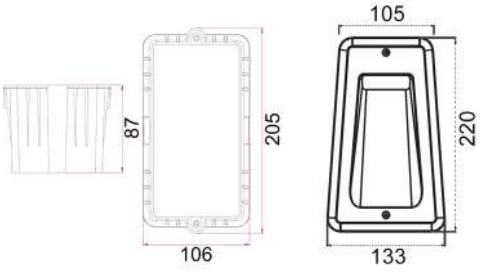



Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Cut Out	Carton QTY
STE5	WALL LED RECD MATTE WH Alum Trapezium	3000K	190LM	7W	>80	133x220mm	205x106mm	1/10
STE6	WALL LED RECD MATTE BLK Alum Trapezium	3000K	190LM	7W	>80	133x220mm	205x106mm	1/10

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

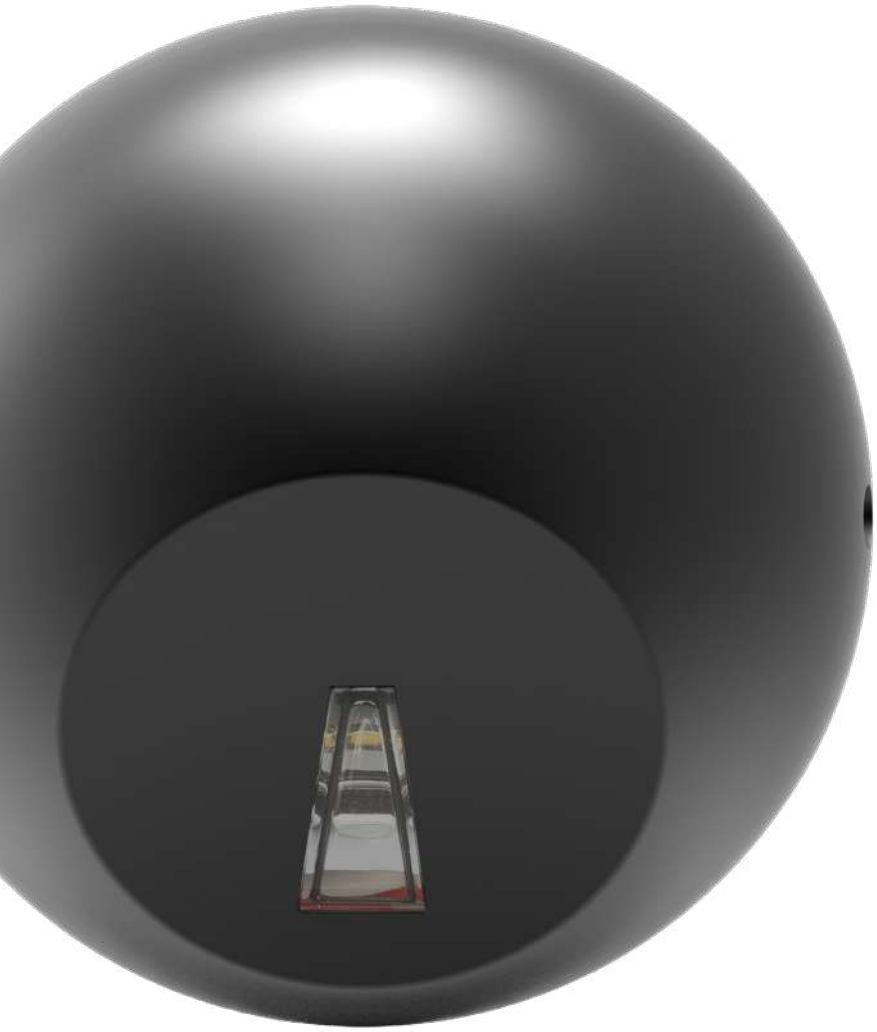




STE7
(Dark Grey)



STE8
(White)

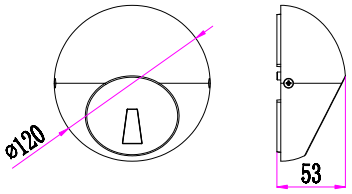

- Exterior LED surface mounted step lights
- Input voltage range: 100-240V AC 50/60Hz
- Housing: aluminium
- Bracket: aluminium
- LED chips: 1pc XPE
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors





Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Cut Out	Carton QTY
STE7	STEP LED 240V AC S/M Dark Grey RND	3000K	45LM	3.5W	>80	Ø120x53mm	205x106mm	1/16
STE8	STEP LED 240V AC S/M WH RND	3000K	45LM	3.5W	>80	Ø120x53mm	205x106mm	1/16

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






STE9
(Aged Bronze)



STE10
(Brass Nickel Plated)



STE27
(Aged Brass)

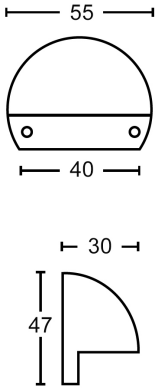


- Exterior LED surface mounted eyelid step lights
- Input voltage range: 12-24V
- External control gear required
- Recommended CLA drivers: OTTER1 series
- Material: solid bronze or solid brass
- Colours: aged bronze or nickel plated
- LED chip: 1pc XP-E-Q5
- Power factor: ≥0.95
- Ambient temperature: -40 to 85^{0}C
- Not suitable for dimming





Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
STE9	STEP EYELID LED 12V S/M BRONZE Aged RND	3000K	107LM	1W	80	55x30mm	1/50
STE10	STEP EYELID LED 12V S/M Brass Nickel Plated RND	3000K	107LM	1W	80	55x30mm	1/50
STE27	STEP EYELID LED 12V S/M Aged brass Brush Finish RND	3000K	107LM	1W	80	55x30mm	1/50

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

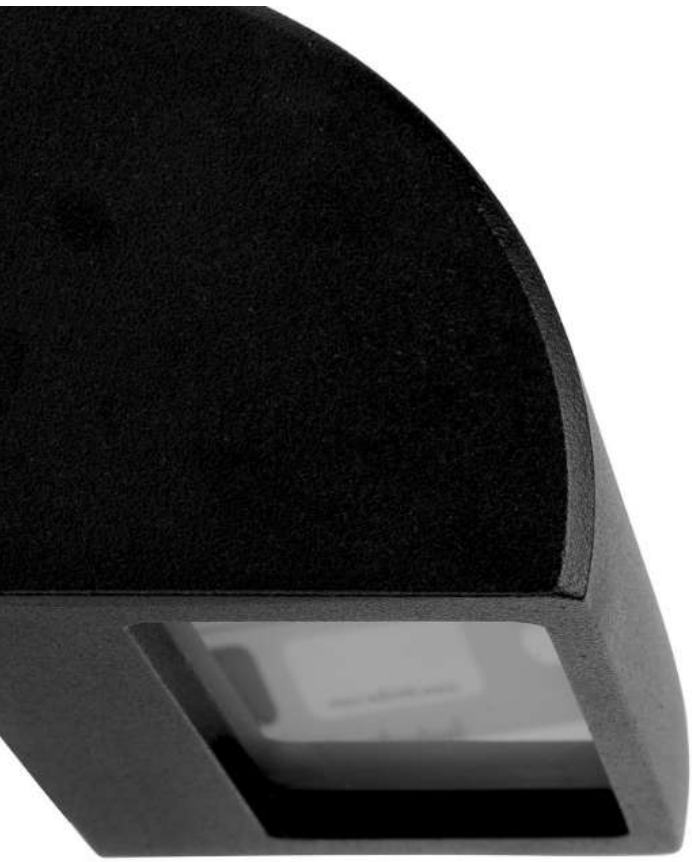



STE12
(Aged Bronze)




STE23
(Antique Bronze)



STE25
(Matte Black)



STE24
(Matte Black)

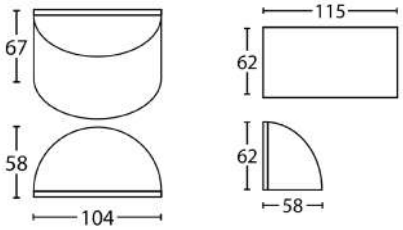

- Exterior surface mounted curved step lights
- Input voltage range: 12-24V
- External control gear required
- CLA recommended drivers: OTTER series
- Material: solid bronze or aluminium
- Lamp holder: G4 (Max.20W)
- Globe not included
- Recommended CLA LED globes: G401, G403, CLAG4L3CW/WW & CLAG4L15CW


G4 | IP65 Rated | 2 YEAR Replacement Warranty



Part No.	Description	Colour	Lamp Holder	Max. Wattage	Dimensions	Carton QTY
STE23	WALL 12V S/M Antique Bronze Curved G4 Bi-Pin	Antique Bronze	1xG4	20W	58x104x67mm	1/10
STE12	WALL 12V S/M Bronze Lge Curved G4 Bi-Pin	Aged Bronze	1xG4	20W	115x62x58mm	1/10
STE24	WALL 12V S/M Matte Black Curved G4 Bi-Pin	Matte Black	1xG4	20W	58x104x67mm	1/20
STE25	WALL 12V S/M Matte Black Large Curved G4 Bi-Pin	Matte Black	1xG4	20W	115x62x58mm	1/20

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*








STE13
(Anodized 316 Stainless Steel)



STE14
(Polished Solid Copper)

- Exterior LED surface mounted eyelid step lights
- Input voltage range: 12-14V
- External control gear required
- Material: Anodized 316 stainless steel / polished solid copper
- LED chips: 3pcs XB-D
- Power factor: 0.95
- Ambient temperature: -40 to 85^{0}C



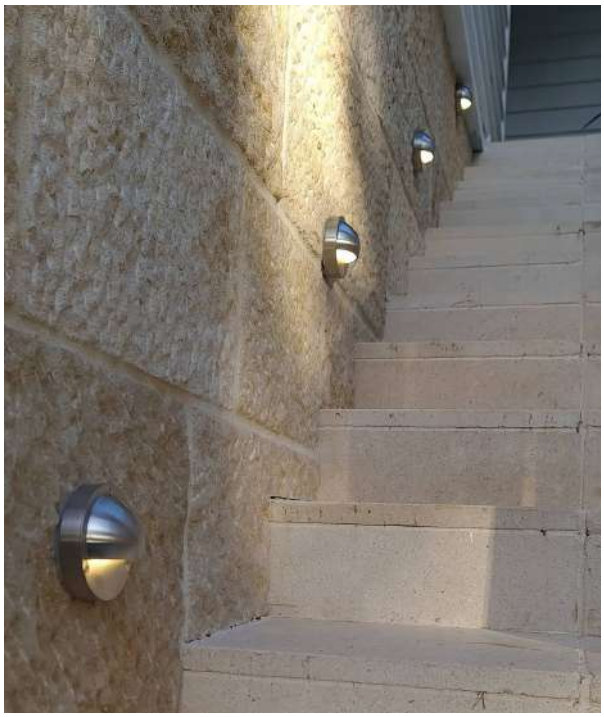


Part No.	Description	Kelvin	Lumens	Watt	CRI	Power Factor	Dimensions	Carton QTY
STE13	WALL 12V Built in LED S/M SS316 Lge Curved	3000K	240LM	3W	80	0.95	Ø98x55mm	1/25
STE14	WALL 12V Built in LED S/M Solid Copper Lge Curved	3000K	240LM	3W	80	0.95	Ø98x55mm	1/25

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






STE15 & STE17
(Matte Black Aluminium)



STE16 & STE18
(Titanium Aluminium)

- Exterior LED surface mounted eyelid step lights
- Input voltage range: 12-14V or 220-240V AC
- 12V fitting requires external control gear
- Material: matt black or titanium aluminium
- Diffuser: PC
- LED chips: 12pcs 2835 LED
- Power factor: 0.98
- Ambient temperature: -40 to 85^{0}C





Part No.	Description	Kelvin	Lumens	Watt	CRI	Power Factor	Dimensions	Carton QTY
STE15	STEP EYELID LED 240V S/M BLK RND	3000K	480LM	6W	75	0.98	Ø98x43mm	1/50
STE16	STEP EYELID LED 240V S/M Titanium RND	3000K	480LM	6W	75	0.98	Ø98x43mm	1/50
STE17	STEP EYELID LED 12V S/M BLK RND	3000K	480LM	6W	75	0.98	Ø98x43mm	1/50
STE18	STEP EYELID LED 12V S/M Titanium RND	3000K	480LM	6W	75	0.98	Ø98x43mm	1/50

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





STE19 & STE20
(Antique Brass)




STE26
(Aged Brass)





STE21 & STE22
(Antique Brass)

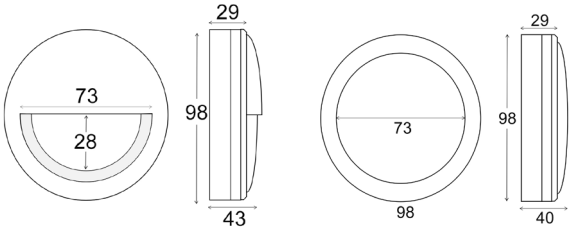

- Exterior LED surface mounted step lights
- Input voltage range: 12-14V / 220-240V AC
- 12V fitting requires external control gear
- Diffuser: PC
- LED chips: 12pcs 2835 LED
- Power factor: 0.98
- Ambient temperature: -40 to 85^{0}C





Part No.	Description	Kelvin	Lumens	Watt	CRI	Power Factor	Dimensions	Carton QTY
STE19	STEP EYELID LED 240V S/M Antique Brass	3000K	480LM	6W	75	0.98	Ø98x43mm	1/20
STE20	STEP EYELID LED 12V S/M Antique Brass	3000K	480LM	6W	75	0.98	Ø98x43mm	1/20
STE21	STEP LED 240V S/M Antique Brass	3000K	600LM	6W	75	0.98	Ø98x43mm	1/20
STE22	STEP LED 12V S/M Antique Brass	3000K	600LM	6W	75	0.98	Ø98x43mm	1/20
STE26	STEP LED EYELID 12V S/M Aged Brass	3000K	480LM	6W	75	0.98	Ø98x43mm	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





STE28
(Black)



STE29
(White)





STE30
(Black)



STE31
(White)

- Exterior LED recessed step lights
- Input voltage range: 220-240V AC 50/60Hz
- External constant current LED driver
- Material: aluminium, glass & plastic
- Faceplate & housing: powder coated aluminium
- Tri-CCT (3000K / 4000K / 6000K) in one fitting
- CCT switch on external LED driver
- LED chips: COB
- Power factor: >0.8
- CRI: 80
- Ambient temperature: -20 to 50^{0}C
- Suitable for dimming







Part No.	Description	Lumens			Watt	Cut out	Carton QTY
		3000K	4000K	6000K			
STE28	STEP Recessed TRI Dim Blk Eyelid Detachable RND Faceplate	95lm	110lm	105lm	5W	Ø85mm	1/50
STE29	STEP Recessed TRI Dim WH Eyelid Detachable RND Faceplate	140lm	170lm	160lm	5W	Ø85mm	1/50
STE30	STEP Recessed TRI Dim Blk Eyelid Detachable Square Faceplate	95lm	110lm	105lm	5W	85x85mm	1/50
STE31	STEP Recessed TRI Dim WH Eyelid Detachable Square Faceplate	140lm	170lm	160lm	5W	85x85mm	1/50

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

LED Pillar Lights

Exterior Lighting

LED






PDL1SQBL
(Black Aluminium)



PDL1SQBRZ
(Bronze)



PDL1SQSS
(316 Stainlesss Steel)



- Exterior LED pillar wall lights
- Input voltage: 12V
- External control gear required
- Housing: bronze/ aluminium/ Marine Grade 316 SS
- LED chips: 2835
- CRI: 75
- Ambient temperature: -40 to 85^{0}C
- Not suitable for dimming



Tested & Recommended Drivers:

All CLA 12V DC Constant Voltage drivers

Part No.	Min.Load	Max.Load
DRIV1	1.2W	9.6W
OTTER1	1.2W	9.6W
CLA111011	1W	8W

Part No.	**PDL1SQBL, PDL1SQBRZ, PDL1SQSS**
Description	WALL/ PILLAR LED S/M SQ 1 WAY
Material	PDL1SQBL: Aluminium PDL1SQBRZ: Bronze PDL1SQSS: 316 Stainless Steel
Kelvin	3000K
Lumens	300LM
Wattage	3W
LED Chips	6pcs 2835
Power factor	0.98
CRI	75
Dimensions	L 80 x W 80 x D 13mm
Carton QTY	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*






PDLUDRECTBLK
(Black Aluminium)



PDLUDRECTBRZ
(Bronze)



PDLUDRECTSS
(316 Stainless Steel)



- Exterior LED pillar wall lights
- Input voltage: 12V DC
- External control gear required
- Housing: bronze/ aluminium/ Marine Grade 316 SS
- LED chips: 2835
- CRI: 75
- Ambient temperature: -40 to 85^{0}C
- Not suitable for dimming



Tested & Recommended Drivers:

All CLA 12V DC Constant Voltage drivers

Part No.	Min.Load	Max.Load
DRIV1	1.2W	9.6W
OTTER1	1.2W	9.6W
CLA111011	1W	8W

Part No.	**PDLUDRECTBLK, PDLUDRECTBRZ, PDLUDRECTSS**
Description	WALL/ PILLAR LED S/M RECT Up/ Down
Material	PDLUDRECTBLK: Aluminium PDLUDRECTBRZ: Bronze PDLUDRECTSS: 316 Stainless Steel
Kelvin	3000K
Lumens	2x300LM
Wattage	2x3W
LED Chips	2x6pcs 2835
Power factor	0.98
CRI	75
Dimensions	L 180 x W 80 x D 13mm
Carton QTY	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Security Pillar Lights

Exterior Lighting

LED Tri-CCT





SEC05
(Single Head)



SEC08
(Double Heads)





SEC08S
(Double Heads with Sensor)

- LED Tri-CCT security pillar lights with/without sensor
- Input voltage: 240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Adjustable: 180^0 (90^0 up/down and left/right)
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- Diffuser: clear glass with honeycomb louver
- Tri-CCT (3000K/ 4000K/ 5500K)
- CCT inbuilt switch under back plate
- LED chips: 1616 LEDs
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

IP65 Rated

2YEAR Replacement Warranty





Sensor Technical Spec:

- Sensor type: PIR sensor
- Installation height: recommended 2-2.5m
- Detection angle: 120^0
- Detection area: max.10m
- Detection range (ØxH): max.10m when installed 2-2.5m
- Time delay: 8 ± 5 sec to 12 ± 2 min (adjustable)
- Manual override: yes

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
SEC05	Security S/ADJ LED WH No Sensor	760LM	800LM	850LM	8W	≥0.9	≥80	1/20
SEC08	D/ADJ LED Matte WH No Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10
SEC08S	D/ADJ LED Matte WH with Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





SEC06
(Single Head)




SEC09
(Double Heads)




SEC09S
(Double Heads with Sensor)

- LED Tri-CCT security pillar lights with/without sensor
- Input voltage: 240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Adjustable: 180^0 (90^0 up/down and left/right)
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- Diffuser: clear glass with honeycomb louver
- Tri-CCT (3000K/ 4000K/ 5500K)
- CCT inbuilt switch under back plate
- LED chips: 1616 LEDs
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

IP65 Rated | 2YEAR Replacement Warranty





Sensor Technical Spec:

- Sensor type: PIR sensor
- Installation height: recommended 2-2.5m
- Detection angle: 120^0
- Detection area: max.10m
- Detection range (ØxH): max.10m when installed 2-2.5m
- Time delay: 8 ± 5 sec to 12 ± 2 min (adjustable)
- Manual override: yes

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
SEC06	Security S/ADJ LED BLK No Sensor	760LM	800LM	850LM	8W	≥0.9	≥80	1/20
SEC09	D/ADJ LED Matte BLK No Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10
SEC09S	D/ADJ LED Matte BLK with Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





SEC07
(Single Head)




SEC10
(Double Heads)




SEC10S
(Double Heads with Sensor)

- LED Tri-CCT security pillar lights with/without sensor
- Input voltage: 240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Adjustable: 180^0 (90^0 up/down and left/right)
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- Diffuser: clear glass with honeycomb louver
- Tri-CCT (3000K/ 4000K/ 5500K)
- CCT inbuilt switch under back plate
- LED chips: 1616 LEDs
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

IP65 Rated | 2YEAR Replacement Warranty





Sensor Technical Spec:

- Sensor type: PIR sensor
- Installation height: recommended 2-2.5m
- Detection angle: 120^0
- Detection area: max.10m
- Detection range (ØxH): max.10m when installed 2-2.5m
- Time delay: 8 ± 5 sec to 12 ± 2 min (adjustable)
- Manual override: yes

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
SEC07	Security S/ADJ LED Titanium No Sensor	760LM	800LM	850LM	8W	≥0.9	≥80	1/20
SEC010	D/ADJ LED Titanium No Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10
SEC10S	D/ADJ LED Titanium with Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Briller Exterior Lighting







BRILLER1



BRILLER2







- Exterior black up/down single / double pillar spot lights
- Input voltage: 110-265V AC
- Material: Powder coated aluminium
- Lamp holder: GU10 (Max.35W globe)
- Globe not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Base	Carton QTY
BRILLER1	PILLAR Up/Dn GU10 x 2 SQ Base Blk	2XGU10	80x80xD25mm	1/10
BRILLER2	PILLAR Up/Dn Double GU10 x 4 RECT Base Blk	4XGU10	100x80xD25mm	1/4

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Rustic Brass) Exterior Lighting





PGUDBR
(Up/Down)




PG1FBR
(Single)




PG1ABR
(Single Adjustable)




PG2ABR
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: solid brass
- Colour: rustic brass
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max.Watt	Base	Carton QTY
PGUDBR	WALL GU10 X 2 (Max 35W) PILLAR UP/DN Rustic Brass	2XGU10	2X35W	Ø68X22mm	1/10
PG1FBR	WALL GU10 (Max 35W) PILLAR FIXED Rustic Brass	1XGU10	35W	Ø68X22mm	1/10
PG1ABR	WALL GU10 (Max 35W) PILLAR S/ADJ Rustic Brass	1XGU10	35W	Ø68X22mm	1/10
PG2ABR	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE Rustic Brass	2XGU10	2X35W	Ø100X20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Aged Brass) Exterior Lighting






PGUDBR1




PG1FBR1



PG1ABR1









- Exterior surface mounted wall pillar lights
- Input voltage: 110-265V AC 50/60Hz
- Material: solid brass
- Lamp holder: GU10 (Max.35W)
- Globe not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Base	Carton QTY
PGUDBR1	WALL GU10 X 2 PILLAR UP/DN Aged Brass	2XGU10	Ø68X22mm	1/10
PG1FBR1	WALL GU10 PILLAR FIXED Aged Brass	1XGU10	Ø68X22mm	1/10
PG1ABR1	WALL GU10 PILLAR S/ADJ Aged Brass 90D Tilt	1XGU10	Ø68X22mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Solid Polished Brass) Exterior Lighting






PGUDBR2



PG1FBR2



PG1ABR2

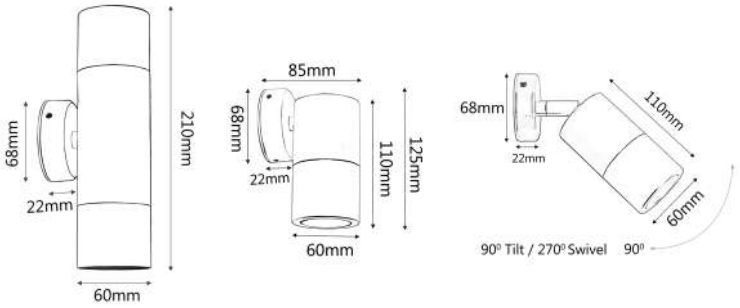



- Exterior surface mounted wall pillar lights
- Input voltage: 110-265V AC 50/60Hz
- Material: solid brass
- Colour: polished brass
- Lamp holder: GU10 (Max.35W)
- Globe not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Base	Carton QTY
PGUDBR2	WALL GU10 X 2 PILLAR UP/DN Solid Polished Brass	2XGU10	Ø68X22mm	1/10
PG1FBR2	WALL GU10 PILLAR FIXED Solid Polished Brass	1XGU10	Ø68X22mm	1/10
PG1ABR2	WALL GU10 PILLAR S/ADJ Solid Polished Brass 90D Tilt	1XGU10	Ø68X22mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Copper) Exterior Lighting





PGUDC
(Up/Down)




PG1FC
(Single)




PG1AC
(Single Adjustable)




PG2AC
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: copper
- Colour: copper
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Base	Carton QTY
PGUDC	WALL GU10 X 2 (Max 35W) PILLAR UP/DN COPPER	2xGU10	2x35W	Ø68x22mm	1/10
PG1FC	WALL GU10 (Max 35W) PILLAR FIXED COPPER	1xGU10	35W	Ø68x22mm	1/10
PG1AC	WALL GU10 (Max 35W) PILLAR S/ADJ COPPER	1xGU10	35W	Ø68x22mm	1/10
PG2AC	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE COPPER	2xGU10	2x35W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Light Weight Copper) Exterior Lighting





PGUDCEC
(Up/Down)




PG1FCEC
(Single)



PG1ACEC
(Single Adjustable)



PG2ACEC
(Double Adjustable)

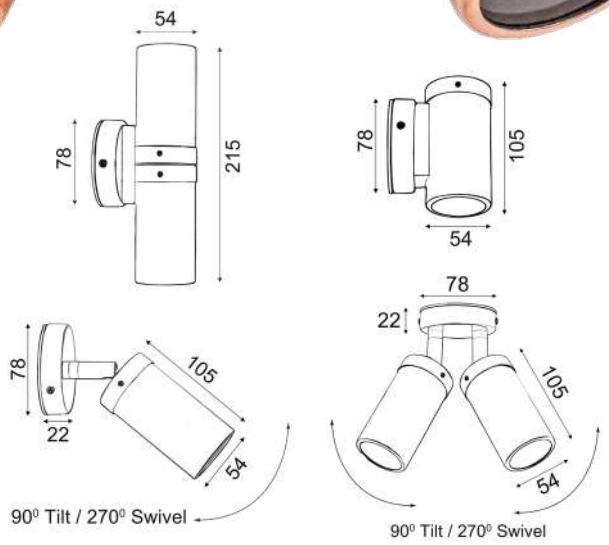



- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: copper (light weight)
- Colour: copper
- Anti-glare honey comb louver
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP54 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDCEC	WALL GU10 X 2 (Max 35W) PILLAR UP/DN COPPER	2xGU10	2x35W	Ø78x22mm	1/20
PG1FCEC	WALL GU10 (Max 35W) PILLAR FIXED COPPER	1xGU10	35W	Ø78x22mm	1/20
PG1ACEC	WALL GU10 (Max 35W) PILLAR S/ADJ COPPER	1xGU10	35W	Ø78x22mm	1/20
PG2ACEC	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE COPPER	2xGU10	2x35W	Ø78x22mm	1/20

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Light Weight Aged Copper) Exterior Lighting





PGUDCECA
(Up/Down)




PG1FCECA
(Single)



PG1ACECA
(Single Adjustable)



PG2ACECA
(Double Adjustable)

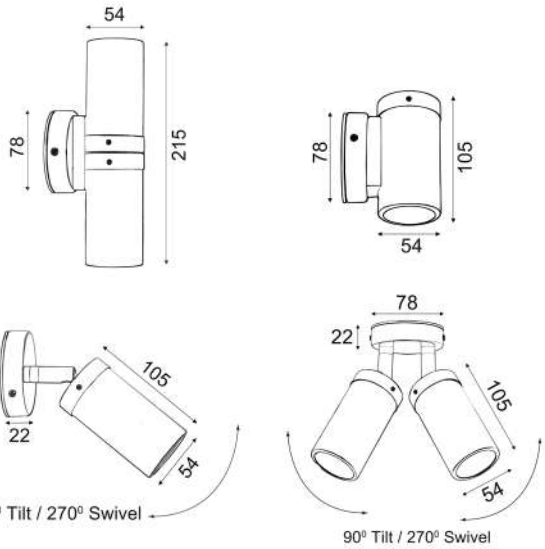

- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: copper (light weight)
- Colour: aged copper
- Anti-glare honey comb louver
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP54 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDCECA	WALL GU10 X 2 (Max 35W) PILLAR UP/DN AGED COP	2xGU10	2x35W	Ø78x22mm	1/20
PG1FCECA	WALL GU10 (Max 35W) PILLAR FIXED AGED COP	1xGU10	35W	Ø78x22mm	1/20
PG1ACECA	WALL GU10 (Max 35W) PILLAR S/ADJ AGED COPP	1xGU10	35W	Ø78x22mm	1/20
PG2ACECA	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE AGED COP	2xGU10	2x35W	Ø78x22mm	1/20

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (316 Stainlesss Steel) Exterior Lighting





PGUDSS
(Up/Down)




PG1FSS
(Single)




PG1ASS
(Single Adjustable)




PG2ASS
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: 316 stainless steel
- Colour: stainless steel
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDSS	WALL GU10 X 2 (Max 35W) PILLAR UP/DN 316 SS	2xGU10	2x35W	Ø68x22mm	1/10
PG1FSS	WALL GU10 (Max 35W) PILLAR FIXED 316 SS	1xGU10	35W	Ø68x22mm	1/10
PG1ASS	WALL GU10 (Max 35W) PILLAR S/ADJ 316 SS	1xGU10	35W	Ø68x22mm	1/10
PG2ASS	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE 316 SS	2xGU10	2x35W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Titanium Aluminium) Exterior Lighting





PGUDT
(Up/Down)



PG1FT
(Single)




PG1AT
(Single Adjustable)




PG2AT
(Double Adjustable)


- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: anodized aluminium
- Colour: titanium
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2 YEAR Replacement Warranty










Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDT	WALL GU10 X 2 (Max 35W) PILLAR UP/DN TITANIUM	2xGU10	2x35W	Ø68x22mm	1/20
PG1FT	WALL GU10 (Max 35W) PILLAR FIXED TITANIUM	1xGU10	35W	Ø68x22mm	1/20
PG1AT	WALL GU10 (Max 35W) PILLAR S/ADJ TITANIUM	1xGU10	35W	Ø68x22mm	1/25
PG2AT	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE TITANIUM	2xGU10	2x35W	Ø100x20mm	1/10


**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*



90⁰ Tilt / 270⁰ Swivel on al heads




PG2BART
(2 Heads)

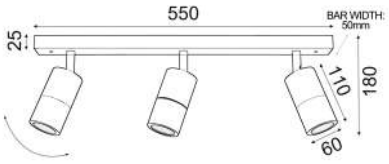

90⁰ Tilt / 270⁰ Swivel on al heads




PG3BART
(3 Heads)

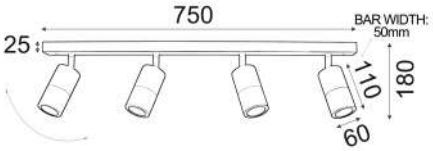

90⁰ Tilt / 270⁰ Swivel on al heads



PG4BART
(4 Heads)



90⁰ Tilt / 270⁰ Swivel



PG4SQT
(4 Heads)

- Exterior surface mounted pillar bar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: anodized aluminium
- Colour: titanium
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP44 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PG2BART	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ BAR TITANIUM	2xGU10	2x35W	350x50x25mm	1/10
PG3BART	WALL GU10 X 3 (Max 35W) PILLAR 3 Light BAR TITANIUM	3xGU10	3x35W	550x50x25mm	1/10
PG4BART	WALL GU10 X 4 (Max 35W) PILLAR 4 Light BAR TITANIUM	4xGU10	4x35W	750x50x25mm	1/10
PG4SQT	WALL GU10 X 4 (Max 35W) PILLAR 4 Light BAR SQ TITANIUM	4xGU10	4x35W	240x240mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Black Aluminium) Exterior Lighting





PGUDBL
(Up/Down)




PG1FBL
(Single)



PG1ABL
(Single Adjustable)



PG2ABL
(Double Adjustable)

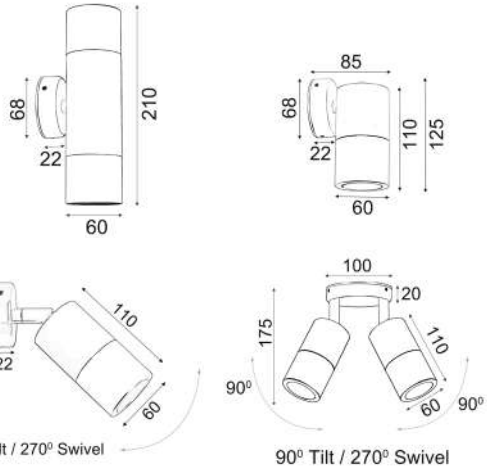




- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: aluminium
- Colour: powder coated black
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDBL	WALL GU10 X 2 (Max 35W) PILLAR UP/DN BLK	2xGU10	2x35W	Ø68x22mm	1/20
PG1FBL	WALL GU10 (Max 35W) PILLAR FIXED BLK	1xGU10	35W	Ø68x22mm	1/20
PG1ABL	WALL GU10 (Max 35W) PILLAR S/ADJ BLK	1xGU10	35W	Ø68x22mm	1/25
PG2ABL	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE BLK	2xGU10	2x35W	Ø100x20mm	1/10


**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*



90⁰ Tilt / 270⁰ Swivel on al heads




PG2BARBL
(2 Heads)

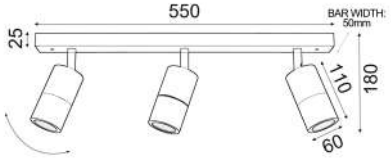

90⁰ Tilt / 270⁰ Swivel on al heads




PG3BARBL
(3 Heads)

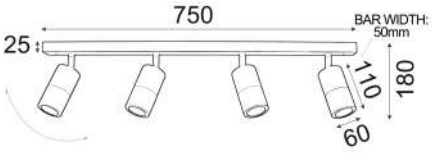

90⁰ Tilt / 270⁰ Swivel on al heads



PG4BARBL
(4 Heads)



90⁰ Tilt / 270⁰ Swivel



PG4SQBL
(4 Heads)

- Exterior surface mounted pillar bar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: aluminium
- Colour: powder coated black
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP44 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PG2BARBL	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ BAR BLK	2xGU10	2x35W	350x50x25mm	1/10
PG3BARBL	WALL GU10 X 3 (Max 35W) PILLAR 3 Light BAR BLK	3xGU10	3x35W	550x50x25mm	1/10
PG4BARBL	WALL GU10 X 4 (Max 35W) PILLAR 4 Light BAR BLK	4xGU10	4x35W	750x50x25mm	1/10
PG4SQBL	WALL GU10 X 4 (Max 35W) PILLAR 4 Light BAR SQ BLK	4xGU10	4x35W	240x240mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (White Aluminium) Exterior Lighting





PGUDWH
(Up/Down)




PG1FWH
(Single)




PG1AWH
(Single Adjustable)




PG2AWH
(Double Adjustable)










- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: aluminium
- Colour: powder coated white
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2 YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDWH	WALL GU10 X 2 (Max 35W) PILLAR UP/DN WHITE	2xGU10	2x35W	Ø68x22mm	1/20
PG1FWH	WALL GU10 (Max 35W) PILLAR FIXED WHITE	1xGU10	35W	Ø68x22mm	1/20
PG1AWH	WALL GU10 (Max 35W) PILLAR S/ADJ WHITE	1xGU10	35W	Ø68x22mm	1/25
PG2AWH	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE WHITE	2xGU10	2x35W	Ø100x20mm	1/10


**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*



90⁰ Tilt / 270⁰ Swivel on al heads




PG2BARWH
(2 Heads)

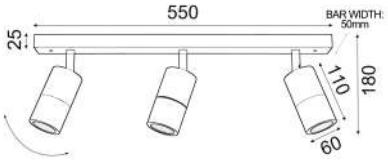

90⁰ Tilt / 270⁰ Swivel on al heads




PG3BARWH
(3 Heads)

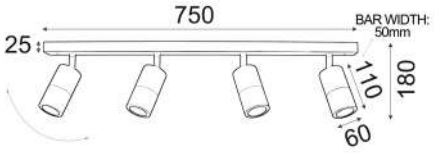

90⁰ Tilt / 270⁰ Swivel on al heads



PG4BARWH
(4 Heads)



90⁰ Tilt / 270⁰ Swivel



PG4SQWH
(4 Heads)

- Exterior surface mounted pillar bar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: aluminium
- Colour: powder coated white
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP44 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PG2BARWH	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ BAR WHITE	2xGU10	2x35W	350x50x25mm	1/10
PG3BARWH	WALL GU10 X 3 (Max 35W) PILLAR 3 Light BAR WHITE	3xGU10	3x35W	550x50x25mm	1/10
PG4BARWH	WALL GU10 X 4 (Max 35W) PILLAR 4 Light BAR WHITE	4xGU10	4x35W	750x50x25mm	1/10
PG4SQWH	WALL GU10 X 4 (Max 35W) PILLAR 4 Light BAR SQ WHITE	4xGU10	4x35W	240x240mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Anodized Aluminium) Exterior Lighting





PGUDSHSIL
(Up/Down)




PG1FSHSIL
(Single)




PG1ASHSIL
(Single Adjustable)




PG2ASHSIL
(Double Adjustable)











- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: Aluminium
- Colour: Anodized aluminium
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDSHSIL	WALL GU10 X 2 (Max 35W) PILLAR UP/DN Anodized AL	2xGU10	2x35W	Ø68x22mm	1/10
PG1FSHSIL	WALL GU10 (Max 35W) PILLAR FIXED Anodized AL	1xGU10	35W	Ø68x22mm	1/10
PG1ASHSIL	WALL GU10 (Max 35W) PILLAR S/ADJ Anodized AL	1xGU10	35W	Ø68x22mm	1/10
PG2ASHSIL	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE Anodized AL	2xGU10	2x35W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Pillar Lights (Matte Grey Aluminium) Exterior Lighting





PGUDSIL
(Up/Down)




PG1FSIL
(Single)




PG1ASIL
(Single Adjustable)




PG2ASIL
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 110-265V AC 50/60Hz
- Material: aluminium
- Colour: powder coated matte grey
- Lamp holder: GU10 (Max.35W)
- Globes not included

GU10 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PGUDSIL	WALL GU10 X 2 (Max 35W) PILLAR UP/DN MATTE GREY	2xGU10	2x35W	Ø68x22mm	1/20
PG1FSIL	WALL GU10 (Max 35W) PILLAR FIXED MATTE GREY	1xGU10	35W	Ø68x22mm	1/20
PG1ASIL	WALL GU10 (Max 35W) PILLAR S/ADJ MATTE GREY	1xGU10	35W	Ø68x22mm	1/25
PG2ASIL	WALL GU10 X 2 (Max 35W) PILLAR D/ADJ RND BASE MATTE GREY	2xGU10	2x35W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Rustic Brass) Exterior Lighting





PMUDBR
(Up/Down)




PM1FBR
(Single)




PM1ABR
(Single Adjustable)




PM2ABR
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: solid brass
- Colour: rustic brass
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDBR	WALL MR16X2 (Max 20W) PILLAR UP/DN RUSTIC BRASS	2xMR16	2x20W	Ø68x22mm	1/10
PM1FBR	WALL MR16 (Max 20W) PILLAR FIXED RUSTIC BRASS	1xMR16	20W	Ø68x22mm	1/10
PM1ABR	WALL MR16 (Max 20W) PILLAR S/ADJ RUSTIC BRASS	1xMR16	20W	Ø68x22mm	1/10
PM2ABR	WALL MR16X2 (Max 20W) PILLAR D/ADJ RND BASE RUSTIC BRASS	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Light Weight Copper) Exterior Lighting





PMUDCEC
(Up/Down)




PM1FCEC
(Single)



PM1ACEC
(Single Adjustable)



PM2ACEC
(Double Adjustable)

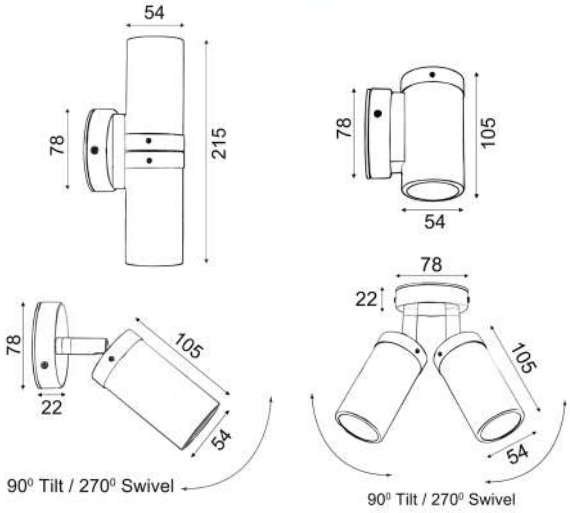

- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: copper (light weight)
- Colour: copper
- Anti-glare honey comb louver
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP54 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDCEC	WALL MR16 12V PILLAR UP/DN COP	2xMR16	2x20W	Ø78x22mm	1/20
PM1FCEC	WALL MR16 (Max 20W) 12V PILLAR FIXED COP	1xMR16	20W	Ø78x22mm	1/20
PM1ACEC	WALL MR16 12V PILLAR S/ADJ COP (Brass knuckle)	1xMR16	20W	Ø78x22mm	1/20
PM2ACEC	WALL MR16 12V PILLAR D/ADJ RND BASE COP	2xMR16	2x20W	Ø78x22mm	1/20

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Light Weight Aged Copper) Exterior Lighting





PMUDCECA
(Up/Down)




PM1FCECA
(Single)





PM1ACECA
(Single Adjustable)




PM2ACECA
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: copper (light weight)
- Colour: aged copper
- Anti-glare honey comb louver
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP54 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDCECA	WALL MR16 12V PILLAR UP/DN AGED COP	2xMR16	2x20W	Ø78x22mm	1/20
PM1FCECA	WALL MR16 (Max 20W) 12V PILLAR FIXED AGED COP	1xMR16	20W	Ø78x22mm	1/20
PM1ACECA	WALL MR16 12V PILLAR S/ADJ AGED COP (Brass knuckle)	1xMR16	20W	Ø78x22mm	1/20
PM2ACECA	WALL MR16 12V PILLAR D/ADJ RND BASE AGED COP	2xMR16	2x20W	Ø78x22mm	1/20

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (316 Stainless Steel) Exterior Lighting





PMUDSS
(Up/Down)




PM1FSS
(Single)




PM1ASS
(Single Adjustable)




PM2ASS
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: 316 stainless steel
- Colour: stainless steel
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDSS	WALL MR16 X 2 (Max 20W) PILLAR UP/DN 316 SS	2xMR16	2x20W	Ø68x22mm	1/10
PM1FSS	WALL MR16 (Max 20W) PILLAR FIXED 316 SS	1xMR16	20W	Ø68x22mm	1/25
PM1ASS	WALL MR16 (Max 20W) PILLAR S/ADJ 316 SS	1xMR16	20W	Ø68x22mm	1/25
PM2ASS	WALL MR16X2 (Max 20W) PILLAR D/ADJ RND BASE 316 SS	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Anodized Aluminium) Exterior Lighting






PMUDSHSIL
(Up/Down)





PM1ASHSIL
(Single Adjustable)



PM2ASHSIL
(Double Adjustable)







- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: aluminium
- Colour: anodized aluminium
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDSHSIL	WALL MR16 X 2 (Max 20W) PILLAR UP/DN ANODIZED AL	2xMR16	2x20W	Ø68x22mm	1/25
PM1ASHSIL	WALL MR16 (Max 20W) PILLAR S/ADJ MATTE ANODIZED AL	1xMR16	20W	Ø68x22mm	1/25
PM2ASHSIL	WALL MR16X2 (Max 20W) PILLAR D/ADJ RND BASE ANODIZED AL	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Titanium Aluminium) Exterior Lighting





PMUDT
(Up/Down)




PM1FT
(Single)




PM1AT
(Single Adjustable)




PM2AT
(Double Adjustable)










- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: anodized aluminium
- Colour: titanium
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2YEAR Replacement Warranty

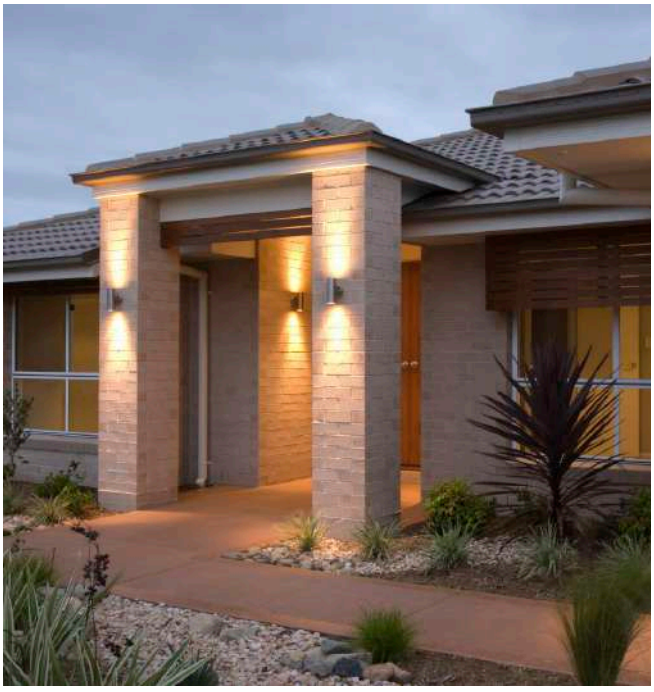

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDT	WALL MR16X2 (Max 20W) PILLAR UP/DN TITANIUM	2xMR16	2x20W	Ø68x22mm	1/25
PM1FT	WALL MR16 (Max 20W) PILLAR FIXED TITANIUM	1xMR16	20W	Ø68x22mm	1/25
PM1AT	WALL MR16 (Max 20W) PILLAR S/ADJ TITANIUM	1xMR16	20W	Ø68x22mm	1/25
PM2AT	WALL MR16X2 (Max 20W) PILLAR D/ADJ RND BASE TITANIUM	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Matte Grey Aluminium) Exterior Lighting





PMUDSIL
(Up/Down)




PM1FSIL
(Single)




PM1ASIL
(Single Adjustable)




PM2ASIL
(Double Adjustable)











- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: aluminium
- Colour: matte grey
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDSIL	WALL MR16 X 2 (Max 20W) PILLAR UP/DN MATTE GREY	2xMR16	2x20W	Ø68x22mm	1/25
PM1FSIL	WALL MR16 (Max 20W) PILLAR FIXED MATTE GREY	1xMR16	20W	Ø68x22mm	1/25
PM1ASIL	WALL MR16 (Max 20W) PILLAR S/ADJ MATTE GREY	1xMR16	20W	Ø68x22mm	1/25
PM2ASIL	WALL MR16 X 2 (Max 20W) PILLAR D/ADJ RND BASE MATTE GREY	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (Black Aluminium) Exterior Lighting





PMUDBL
(Up/Down)




PM1FBL
(Single)




PM1ABL
(Single Adjustable)




PM2ABL
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: aluminium
- Colour: powder coated black
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2 YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDBL	WALL MR16 X 2 (Max 20W) PILLAR UP/DN BLK	2xMR16	2x20W	Ø68x22mm	1/25
PM1FBL	WALL MR16 (Max 20W) PILLAR FIXED BLK	1xMR16	20W	Ø68x22mm	1/25
PM1ABL	WALL MR16 (Max 20W) PILLAR S/ADJ BLK	1xMR16	20W	Ø68x22mm	1/25
PM2ABL	WALL MR16 X 2 (Max 20W) PILLAR D/ADJ RND BASE BLK	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Pillar Lights (White Aluminium) Exterior Lighting





PMUDWH
(Up/Down)




PM1FWH
(Single)




PM1AWH
(Single Adjustable)




PM2AWH
(Double Adjustable)









- Exterior surface mounted pillar lights
- Input voltage range: 12-24V AC/DC
- Material: aluminium
- Colour: white
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Remote control gear required

MR16 | IP65 Rated | 2YEAR Replacement Warranty



Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
PMUDWH	WALL MR16 X 2 (Max 20W) PILLAR UP/DN WHITE	2xMR16	2x20W	Ø68x22mm	1/25
PM1FWH	WALL MR16 (Max 20W) PILLAR FIXED WHITE	1xMR16	20W	Ø68x22mm	1/25
PM1AWH	WALL MR16 (Max 20W) PILLAR S/ADJ WHITE	1xMR16	20W	Ø68x22mm	1/25
PM2AWH	WALL MR16X2 (Max 20W) PILLAR D/ADJ RND BASE WHITE	2xMR16	2x20W	Ø100x20mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Sakup Exterior Lighting






SAKUP1
(White)



SAKUP2
(Black)





- Exterior GU10 spot ceiling lights
- Input voltage: 110-265V AC
- Material: Powder coated aluminium
- Lamp holder: 3xGU10 (Max.35W globe)
- Globe not included

GU10 | IP54 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Base	Carton QTY
SAKUP1	SPOT GU10 X 3 Outdoor Ceiling Adjustable Wh	3xGU10	Ø240mm	1/4
SAKUP2	SPOT GU10 X 3 Outdoor Ceiling Adjustable Black	3xGU10	Ø240mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Adjustable Pillar Spot Lights Exterior Lighting






SM1ACEC & SG1ACEC
(GU10 / MR16 Copper)



SM1ACECA & SG1ACECA
(GU10 / MR16 Aged Copper)





- Exterior single adjustable wall pillar/ spot lights
- Input voltage: 12V or 240V
- Material: solid copper (light weight)
- Anti-glare honey comb louver
- Lamp holder: GU10 or MR16
- Max 35W globe for GU10 models
- Max 20W globe for MR16 models
- Globes not included
- MR16 fitting requires external control gear

GU10 | MR16 | IP54 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Back Plate	Carton QTY
SG1ACEC	WALL GU10 PILLAR SPOT S/ADJ (Brass Bracket) COP	GU10	35W	Ø76mm	1/20
SG1ACECA	WALL GU10 PILLAR SPOT S/ADJ (Brass Bracket) AGED COP	GU10	35W	Ø76mm	1/20
SM1ACEC	WALL MR16 12V SPOT S/ADJ (Brass Bracket) COP	MR16	20W	Ø76mm	1/20
SM1ACECA	WALL MR16 PILLAR SPOT S/ADJ (Brass Bracket) AGED COP	MR16	20W	Ø76mm	1/20

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

- Exterior surface mounted wall & bollard lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: powder coated 304 stainless steel
- Screws & surface mounting bracket + louvres: stainless steel (Not for use inground)
- Diffuser: clear PC
- Lamp holder: E27 (Max.18W)
- Recommended CLA globes: 3U001-003 (when used with external control gear), CAN & LT series (Limited space of Ø53mm x H 145mm available)
- Globe not included
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

E27 | IP44 Rated | 2YEAR Replacement Warranty



CLAW32
(Wall Light)



CLA1615SBL
(Bollard Light)

CLA1615S
(Bollard Light)

CLA1615LBL
(Bollard Light)

CLA1615L
(Bollard Light)

Part No.	Description	Lamp Holder	Diam	Inside Louvr	Height	Mounting Plate	Carton QTY
CLAW32	WALL ES S/M FIXED	E27	Ø101mm	Ø53 x H 145mm	265mm	Ø97mm	1/10
CLA1615SBL	BOLLARD SS304 ES BLK	E27	Ø101mm	Ø53 x H 145mm	500mm	Ø145mm	1/10
CLA1615S	BOLLARD SS304 ES	E27	Ø101mm	Ø53 x H 145mm	500mm	Ø145mm	1/10
CLA1615LBL	BOLLARD SS304 ES BLK LONG	E27	Ø101mm	Ø53 x H 145mm	1000mm	Ø145mm	1/4
CLA1615L	BOLLARD SS304 ES LONG	E27	Ø101mm	Ø53 x H 145mm	1000mm	Ø145mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Borda Exterior Lighting





BORDA1
(Black / Wall Light)



BORDA2
(Stainless Steel / Wall Light)




BORDA3
(Black / Bollard Light / Short)



BORDA6
(Stainless Steel / Bollard Light/ Long)

- Exterior surface mounted wall & bollard lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: 304 stainless steel
- Diffuser: opal PC (Ø115 x H 160mm)
- Lamp holder: E27 (Max.18W)
- Globe not included
- Recommended CLA globes: 3U001-003 (when used with external control gear), CAN & LT series
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

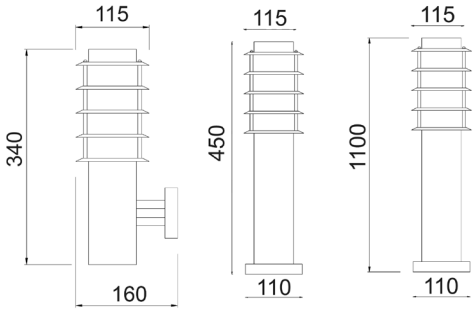

E27 | IP44 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Diam	Inside Louvr	Height	Base	Carton QTY
BORDA1	WALL ES S/M FIXED SS304 BLACK	Ø115mm	Ø76x160mm	340mm	Ø110mm	1/10
BORDA2	WALL ES S/M FIXED SS304	Ø115mm	Ø76x160mm	340mm	Ø110mm	1/10
BORDA3	BOLLARD SHORT SS304 ES BLACK H450MM	Ø115mm	Ø76x160mm	450mm	Ø110mm	1/10
BORDA4	BOLLARD SHORT SS304 ES H450MM	Ø115mm	Ø76x160mm	450mm	Ø110mm	1/10
BORDA5	BOLLARD LONG SS304 ES BLACK H1000MM	Ø115mm	Ø76x160mm	1100mm	Ø110mm	1/10
BORDA6	BOLLARD LONG SS304 ES H1000MM	Ø115mm	Ø76x160mm	1100mm	Ø110mm	1/10

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Torre Exterior Lighting





TORRE1
(Black/ Wall Light)



TORRE2
(Stainless Steel/ Wall Light)




TORRE3
(Black/ Bollard Light/ Short)



TORRE4
(Stainless Steel/ Bollard Light/ Short)

- Exterior surface mounted wall & bollard lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing: 304 stainless steel
- Diffuser: opal PC (Ø76 x H 160mm)
- Lamp holder: E27 (Max.18W)
- Globe not included
- Recommended CLA globes: 3U001-003 (when used with external control gear), CAN & LT series
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

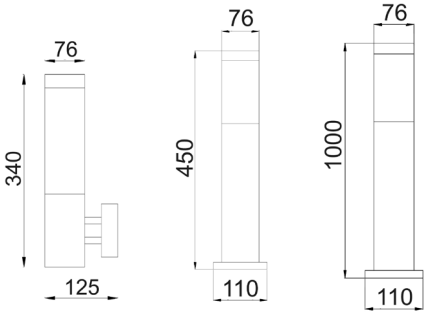

E27 | IP44 Rated | 2 YEAR Replacement Warranty


Part No.	Description	Diam	Height	Base	Carton QTY
TORRE1	WALL ES S/M FIXED SS304 BLACK RND	Ø76mm	340mm	Ø110mm	1/10
TORRE2	WALL ES S/M FIXED SS304 RND	Ø76mm	340mm	Ø110mm	1/10
TORRE3	BOLLARD SHORT SS304 ES BLK H450mm	Ø76mm	450mm	Ø110mm	1/10
TORRE4	BOLLARD SHORT SS304 ES H450mm	Ø76mm	450mm	Ø110mm	1/10
TORRE5	BOLLARD LONG SS304 BLACK ES H1000mm	Ø76mm	1000mm	Ø110mm	1/10
TORRE6	BOLLARD LONG SS304 ES H1000mm	Ø76mm	1000mm	Ø110mm	1/10

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Phare (GU10) Exterior Lighting

- Exterior surface mounted wall & bollard lights
- Input voltage range: 110-265V AC
- Housing: aluminium /acrylic/ 316 stainless steel
- Lamp holder: GU10 (Max.35W)
- Globe not included
- IP rating: wall lamps IP65 and bollard lights IP54
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

GU10 | IP65 Rated | IP54 Rated | 2YEAR Replacement Warranty







PHARE01G
(Wall Light)




PHARE02G
(Wall Light)

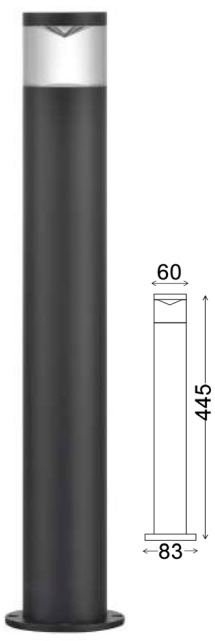


PHARE03G
(Bollard Light)

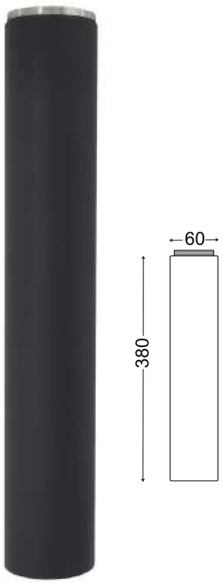


PHARE03EXT
(Bollard Extension)

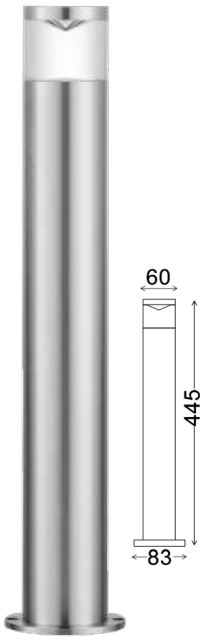

PHARE04G
(Bollard Light)

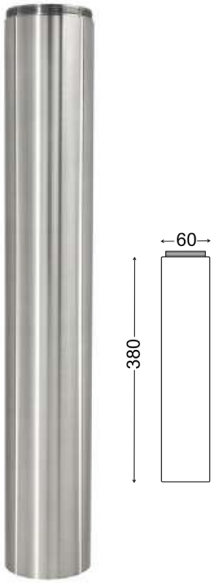

PHARE04EXT
(Bollard Extension)

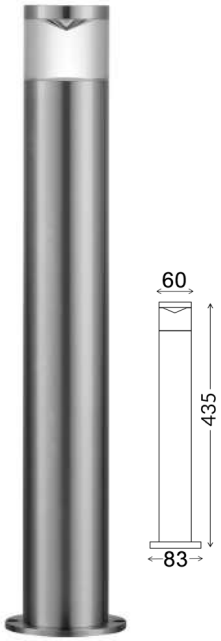

PHARE05G
(Bollard Light)


Part No.	Description	Lamp Holder	Max. Watt	Diam	Height	Mounting Plate	Carton QTY
PHARE01G	WALL PILLAR UP/DN MATTE BLK Anti Glare	2xGU10	35W	Ø60mm	263mm	Ø68mm	1/20
PHARE02G	WALL PILLAR UP/DN ALU TITANIUM Anodized	2xGU10	35W	Ø60mm	263mm	Ø68mm	1/20
PHARE03G	BOLLARD ALU MATTE BLK Anti Glare	1xGU10	35W	Ø60mm	445mm	Ø83mm	1/10
PHARE04G	BOLLARD ALU TITANIUM Anodized Anti Glare	1xGU10	35W	Ø60mm	445mm	Ø83mm	1/10
PHARE05G	BOLLARD SS316 35W Anti Glare	1xGU10	35W	Ø60mm	435mm	Ø83mm	1/10
BOLLARD EXTENSION							
PHARE03EXT	BOLLARD EXTENSION MATTE BLK Screw in	-	-	Ø60mm	380mm	-	1/25
PHARE04EXT	BOLLARD EXTENSION TITANIUM Screw in	-	-	Ø60mm	380mm	-	1/25

**For bollard Lights, Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Phare (MR16) Exterior Lighting

- Exterior surface mounted wall & bollard lights
- Input voltage range: 12-24V AC/DC
- Housing: aluminium /acrylic/ 316 stainless steel
- Lamp holder: MR16 (Max.20W)
- Globe not included
- IP rating: wall lamps IP65 and bollard lights IP54
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

MR16 | IP65 Rated | IP54 Rated | 2YEAR Replacement Warranty





PHARE01G
(Wall Light)



PHARE02G
(Wall Light)



PHARE03G
(Bollard Light)

PHARE03EXT
(Bollard Extension)

PHARE04G
(Bollard Light)

PHARE04EXT
(Bollard Extension)


PHARE05G
(Bollard Light)

Part No.	Description	Lamp Holder	Max. Watt	Diam	Height	Mounting Plate	Carton QTY
PHARE01M	WALL PILLAR UP/DN MATTE BLK Anti Glare	2xMR16	20W	Ø60mm	263mm	Ø68mm	1/20
PHARE02M	WALL PILLAR UP/DN ALU TITANIUM Anodized	2xMR16	20W	Ø60mm	263mm	Ø68mm	1/20
PHARE03M	BOLLARD ALU MATTE BLK Anti Glare	1xMR16	20W	Ø60mm	445mm	Ø83mm	1/10
PHARE04M	BOLLARD ALU TITANIUM Anodized Anti Glare	1xMR16	20W	Ø60mm	445mm	Ø83mm	1/10
PHARE05M	BOLLARD SS316 35W Anti Glare	1xMR16	20W	Ø60mm	435mm	Ø83mm	1/10
BOLLARD EXTENSION							
PHARE03EXT	BOLLARD EXTENSION MATTE BLK Screw in	-	-	Ø60mm	380mm	-	1/25
PHARE04EXT	BOLLARD EXTENSION TITANIUM Screw in	-	-	Ø60mm	380mm	-	1/25

**For bollard Lights, Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Geb Exterior Lighting LED







GEB1
(Wall Light)







GEB2
(Bollard Light H500mm)

GEB3
(Bollard Light H800mm)

- Exterior LED surface mounted wall & bollard lights
- Input voltage rang: 100-240V 50/60Hz
- Output voltage range: 18-42V
- Material: aluminium post, die-cast & PC
- LED chips: 12pcs 3030
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

30,000hr Lifetime | 120^0 Beam Angle | IP54 Rated | 3YEAR Replacement Warranty






GEB2 & 3 Pole base OD: 90mm ID: 29mm

Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
GEB1	WALL LED S/M Dark Grey Tapered	3000K	580LM	13W	>0.5	>80	L 276 x W 140mm	-	1/8
GEB2	BOLLARD LED Dark Grey Tapered	3000K	580LM	13W	>0.5	>80	H 500mm	Ø90mm	1/4
GEB3	BOLLARD LED Dark Grey Tapered	3000K	580LM	13W	>0.5	>80	H 800mm	Ø90mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Amun Exterior Lighting LED







AMUN1
(Wall Light)




AMUN2
(Bollard Light H300mm)

AMUN3
(Bollard Light H500mm)

AMUN4
(Bollard Light H800mm)

- Exterior LED surface mounted wall & bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Constant current driver included
- Material: double anti-corrosion powder coate high-pressure cast aluminium & anti aging UV protected PC diffuser
- All products have diffusers both front & back
- Comes with stainless steel screws
- LED chips: 2835 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



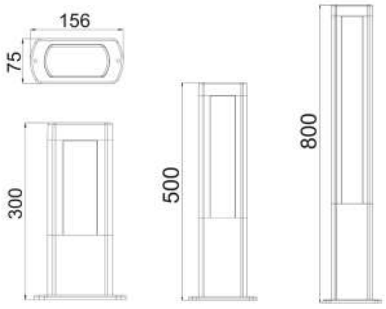


Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
AMUN1	WALL LED Matte Black Rect	3000K	560LM	10W	>0.5	>80	L250 x W110mm	-	1/6
AMUN2	BOLLARD LED Matte Black Rect	3000K	560LM	10W	>0.5	>80	H300mm	156x75mm	1/8
AMUN3	BOLLARD LED Matte Black	3000K	645LM	12.5W	>0.5	>80	H500mm	156x75mm	1/4
AMUN4	BOLLARD LED Matte Black	3000K	756LM	12.5W	>0.5	>80	H800mm	156x75mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Seth Exterior Lighting LED







SETH1
(Wall Light)

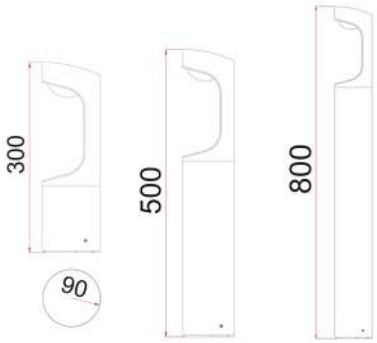

- Exterior LED surface mounted wall & bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Constant current driver included
- Material: double anti-corrosion powder coate high-pressure cast aluminium & anti aging UV protected PC diffuser
- LED chips: 8pcs 3030 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector





SETH2
(Bollard Light
H300mm)



SETH3
(Bollard Light
H500mm)



SETH4
(Bollard Light
H800mm)

Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
SETH1	WALL LED 240V S/M Matte Black	3000K	428.76LM	9W	>0.5	>80	L 272 x W 90mm	-	1/8
SETH2	BOLLARD LED Matte Black	3000K	428.76LM	9W	>0.5	>80	H 300mm	Ø90mm	1/9
SETH3	BOLLARD LED Matte Black	3000K	428.76LM	9W	>0.5	>80	H 500mm	Ø90mm	1/9
SETH4	BOLLARD LED Matte Black	3000K	428.76LM	9¥W	>0.5	>80	H 800mm	Ø90mm	1/9

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Horus Exterior Lighting LED







HORUS1
(Wall Light)




HORUS2
(Bollard Light H300mm)

HORUS3
(Bollard Light H500mm)

HORUS4
(Bollard Light H800mm)

- Exterior LED surface mounted wall & bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Constant current driver included
- Material: double anti-corrosion powder coate high-pressure cast aluminium & anti aging UV protected PC diffuser
- Comes with stainless steel screws
- LED chips: 8pcs 3030 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



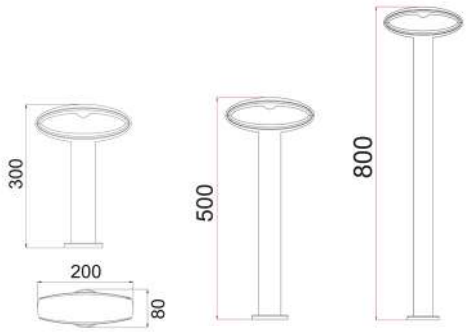


Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Carton QTY
HORUS1	WALL LED S/M Matte Black Crescent	3000K	364LM	9W	>0.5	>80	L 200x W66.6mm	1/8
HORUS2	BOLLARD LED Matte Black Open Oval	3000K	368LM	9W	>0.5	>80	H 300mm	1/8
HORUS3	BOLLARD LED Matte Black Open Oval	3000K	350LM	9W	>0.5	>80	H 500mm	1/4
HORUS4	BOLLARD LED Matte Black Open Oval	3000K	355LM	9W	>0.5	>80	H 800mm	1/4


**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Hathor Exterior Lighting LED


- Exterior LED surface mounted wall & bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt constant current driver included
- Driver output voltage range: 18-42V
- Housing & heatsink: powder coated-aluminium
- Diffuser: PC
- HATHOR1 back plate: PC
- HATHOR2-3 surface mounting plate: die cast aluminium
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector


30,000hr Lifetime | 120° Beam Angle | IP54 Rated | 3YEAR Replacement Warranty



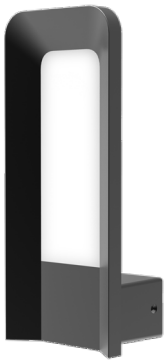


HATHOR1
(Wall Light)

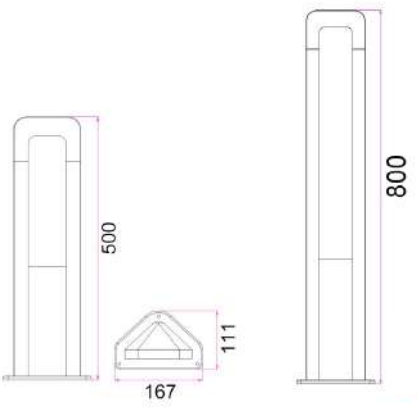

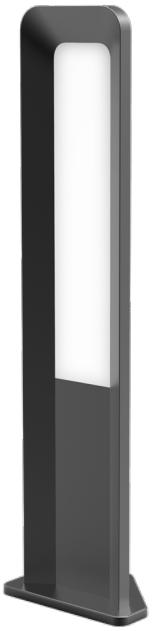

HATHOR2
(Bollard Light H500mm)

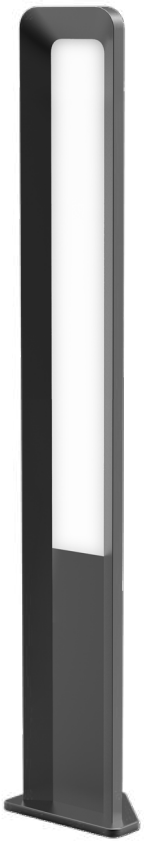

HATHOR3
(Bollard Light H800mm)


Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
HATHOR1	WALL LED DARK GREY S/M	3000K	175.58LM	9W	>0.5	>80	280x127x102mm	-	1/8
HATHOR2	BOLLARD LED DARK GREY	3000K	242.19LM	13W	>0.5	>80	H 500mm	167x111mm	1/4
HATHOR3	BOLLARD LED DARK GREY	3000K	242.19LM	13W	>0.5	>80	H 800mm	167x111mm	1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Seker Exterior Lighting LED

- Exterior LED surface mounted bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt driver output range: 18-42V
- Housing: powder coated aluminium
- Heatsink & mounting bracket: aluminium
- LED chip: 1pc 7070
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not for use inground
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



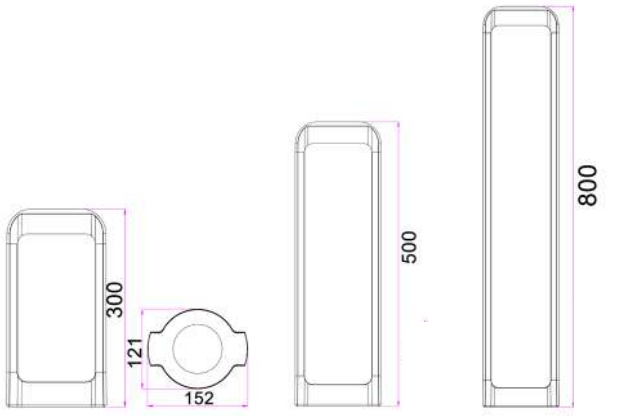



SEKER1
(Bollard Light H300mm)



SEKER2
(Bollard Light H500mm)



SEKER3
(Bollard Light H800mm)

Part No.	Description	Kelvin	Lumenes	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
SEKER1	BOLLARD LED Dark Grey Short	3000K	530LM	13W	>0.5	80	H 300mm	152x121mm	1/8
SEKER2	BOLLARD LED Dark Grey med	3000K	530LM	13W	>0.5	80	H 500mm	152x121mm	1/4
SEKER3	BOLLARD LED Dark Grey long	3000K	530LM	13W	>0.5	80	H 800mm	152x121mm	1/4

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Toren Exterior Lighting LED Tri-CCT

- Exterior LED Tri-CCT bollard light
- Input voltage: 100-240V 50/60Hz
- Inbuilt Constant Current LED driver
- Housing: powder coated Aluminium
- Heat sink: Aluminium
- Mounting plate: PC
- LED chips: 24pcs 2835 SMD
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- CRI: >80
- Power factor: >0.8
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensor
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector





TOREN1
(Bollard Light H800mm)

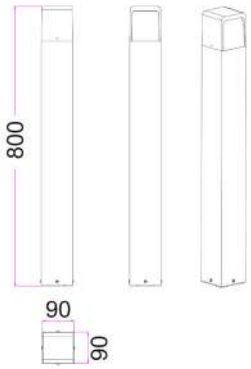



Part No.	Description	Lumens			Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
		3000K	4000K	6500K						
TOREN1	BOLLARD LED Dark Grey	214LM	236LM	211LM	13W	0.8	80	H 800mm	90x90mm	1/4

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Bol Exterior Lighting LED

- Exterior LED surface mounted bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt driver output voltage range: 18-42V
- Housing: powder coated aluminium
- Heatsink & mounting bracket: aluminium
- LED chip: 1pc 7070
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not for use inground
- Not suitable for dimming
- Suitable for 2-way switching
- For bollard lights, they are designed for mounting on a solid surface such as a concrete path or sturdy timber decking. To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector


30,000hr Lifetime | IP54 Rated | 3YEAR Replacement Warranty



BOL1A
(Bollard Light H800mm)



BOL2A
(Bollard Light H800mm)

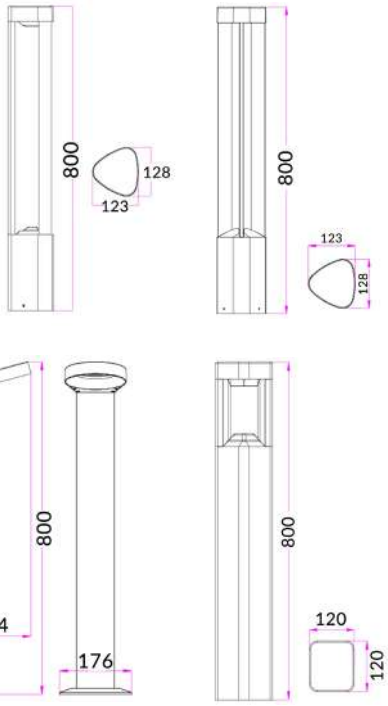



BOL3A
(Bollard Light H800mm)



BOL4A
(Bollard Light H800mm)

Part No.	Description	Kelvin	Lumens	Watt	Beam Angle	PF	CRI	Height	Mounting Plate	Carton QTY
BOL1A	BOLLARD LED GREY 3 SECTIONS	3000K	216LM	7W	197^0	>0.5	>80	800mm	see line drawings above	1/4
BOL2A	BOLLARD LED GREY TRIANGULAR	3000K	120LM	7W	106^0	>0.5	>80	800mm		1/4
BOL3A	BOLLARD LED GREY HOOP	3000K	211LM	7W	119^0	>0.5	>80	800mm		1/4
BOL4A	BOLLARD LED GREY SQUARE	3000K	193LM	7W	343^0	>0.5	>80	800mm		1/4

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Mestolo Exterior Lighting LED






MESTOLO1
(Aged Brass)

MESTOLO2
(Matte Black Aluminium)

- Exterior LED garden spike lights
- Input voltage: 12-14V AC/DC
- External control gear required
- Material: weathered solid brass / powder coated aluminium
- Spike material: brass/aluminium
- Flex: 1000mm
- LED chips: 9pcs 2835
- Power factor: 0.98
- CRI: 80
- Ambient temperature: -40 to 85^{0}C
- Not suitable for dimming
- Suitable for use with PIR or Microwave sensor
- Suitable for 2 way switching
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



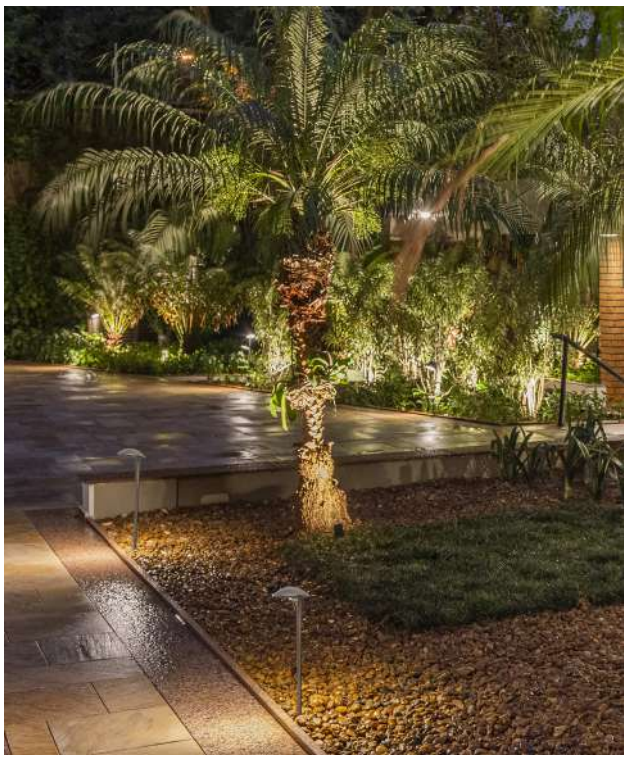

Part No.	Description	Colour	Material	Kelvin	Lumens	Watt	Carton Qty
MESTOLO1	SPIKE LED Fixed Aged Brassn L500mm Anti Glare	Aged Brass	Solid Brass	3000K	400LM	5W	1/10
MESTOLO2	SPIKE LED Fixed Black (Aluminium) L500mm Anti Glare	Matte Black	Aluminium	3000K	400LM	5W	1/10

To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

Coolie Exterior Lighting





COOLIE01
(Rustic Brass)




COOLIE02
(Matte Black)

- Exterior garden spike lights
- Input voltage range: 12-25V
- Material: solid brass / aluminium
- Colour: rustic antique brass / matte black
- Lamp holder: G4 (Max.20W)
- Globe not included
- Flex: 920mm
- External control gear required
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

G4 | IP54 Rated | 2 YEAR Replacement Warranty



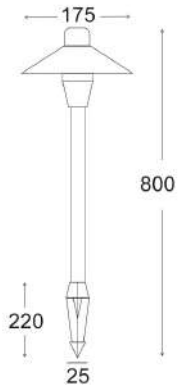

Part No.	Description	Lamp Holder	Max. Watt	Diam	Total Length	Spike L	Carton QTY
COOLIE01	SPIKE G4 12V FIXED Rustic Brass	1xG4	20W	Ø175mm	800mm	220mm	1/10
COOLIE02	SPIKE G4 12V FIXED Matte Black	1xG4	20W	Ø175mm	800mm	220mm	1/10

**Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Spm Exterior Lighting

- Exterior garden spike lights
- Input voltage range: 12-25V AC/DC
- Material: aluminium, copper, brass & 316 stainless steel
- Lamp hoder: MR16 (Max.20W)
- Globes not included
- Cable included (L 2000mm)
- External control gear required
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

MR16 | IP65 Rated | 2YEAR Replacement Warranty



SPMSBL
(Aluminium Black)



SPMSC
(Copper)



SPMSSS
(316 Stainless Steel)




SPMST
(Aluminium Titanium)




SPMSBR1
(Aged Brass)



SPMSBR2
(Polished Brass)

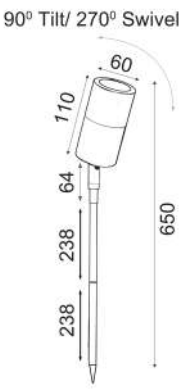

SPMS

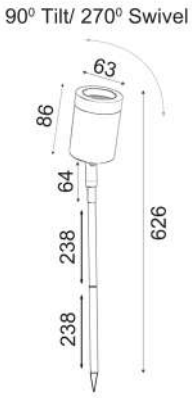

SPMS 86



SPMSBL86
(Aluminium Black)



SPMSSS86
(316 Stainless Steel)

Part No.	Description	Lamp Holder	Max. Watt	Height	Barrel	Carton QTY
SPMSBL	SPIKE MR16 12V S/ADJ BLK L650mm	1xMR16	20W	650mm	110xØ60mm	1/20
SPMSBR1	SPIKE MR16 12V AGED BRASS L650mm	1xMR16	20W	650mm	110xØ60mm	1/20
SPMSBR2	SPIKE MR16 12V POLISHED BRASS L650mm	1xMR16	20W	650mm	110xØ60mm	1/20
SPMSC	SPIKE MR16 12V S/ADJ COP L650mm	1xMR16	20W	650mm	110xØ60mm	1/10
SPMSSS	SPIKE MR16 12V S/ADJ 316 SS L650mm	1xMR16	20W	650mm	110xØ60mm	1/10
SPMST	SPIKE MR16 12V S/ADJ TITANIUM L650mm	1xMR16	20W	650mm	110xØ60mm	1/20
SPMSBL86	SPIKE MR16 S/ADJ BLK L626mm	1xMR16	20W	626mm	86xØ63mm	1/20
SPMSSS86	SPIKE MR16 S/ADJ 316 SS L626mm	1xMR16	20W	626mm	86xØ63mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*





SPM1ALC
(Copper)



SPM2ALC
(Copper)

- Exterior garden spike lights
- Input voltage range: 12-25V AC/DC
- Material: solid copper/ 316 stainless steel/ aluminium
- Lamp holder: MR16 (Max.20W)
- Globes not included
- Spike length: 1000mm
- Cable included (L 900mm)
- External control gear required
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector


MR16 | IP65 Rated | 2 YEAR Replacement Warranty



SPM1ALSS
(316 Stainless steel)



SPM2ALSS
(316 Stainless steel)

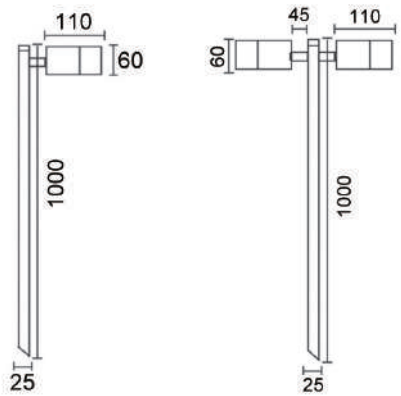



SPM1ALBL
(Aluminium black)



SPM2ALBL
(Aluminium black)

Part No.	Description	Lamp Holder	Max. Watt	Height	Barrel	Carton QTY
SPM1ALBL	SPIKE MR16 12V S/ADJ AL BLK L1000mm	1xMR16	20W	1000mm	110xØ60mm	1/10
SPM1ALC	SPIKE MR16 12V S/ADJ COP L1000mm	1xMR16	20W	1000mm	110xØ60mm	1/10
SPM1ALSS	SPIKE MR16 12V S/ADJ SS316 L1000mm	1xMR16	20W	1000mm	110xØ60mm	1/10
SPM2ALBL	SPIKE MR16 12V D/ADJ AL BLK L1000mm	2xMR16	20W	1000mm	110xØ60mm	1/10
SPM2ALC	SPIKE MR16 12V D/ADJ COP L1000mm	2xMR16	20W	1000mm	110xØ60mm	1/10
SPM2ALSS	SPIKE MR16 12V D/ADJ SS316 L1000mm	2xMR16	20W	1000mm	110xØ60mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Phare Exterior Lighting






PHARE06M
(Titanium Anodized)



PHARE07M
(Black)

- Exterior garden spike lights
- Input voltage range: 12-25V
- Housing: aluminium & acrylic
- Lamp holder: MR16 (Max.20W)
- Globe not included
- Flex: 1100mm
- Anti-glare
- External control gear required
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



MR16 | IP65 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Watt	Barrel Diam	Barrel Length	Spike L	Carton QTY
PHARE06M	SPIKE MR16 12V FIXED Titanium Anodized	1xMR16	20W	Ø60mm	140mm	400mm	1/10
PHARE07M	SPIKE MR16 12V FIXED Powder Coated BLK	1xMR16	20W	Ø60mm	140mm	400mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Kolec Exterior Lighting

LED

- Exterior LED garden spike light
- Input voltage: 12V
- Material: die cast aluminium
- Spike material: PC
- Diffuser: clear glass
- Adjustable up/down head : 10-80^0
- LED chip: 1 COB
- Power factor: >0.5
- CRI: >80
- Flex only: 1m
- Ambient temp: -20 to 50^{0}C
- Suitable for 2 way switching
- Suitable for use with Microwave or PIR sensors
- External Constant voltage driver required
- Recommended CLA 12V waterproof LED drivers
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector





KOLEC1
(Dark Grey)

Part No.	Description	Colour	Kelvin	Lumens	Watt	Carton QTY
KOLEC1	SPIKE/HOOD (Dark Grey) Adj 12V L314mm	Dark Grey	3000K	930LM	13W	1/12

Kam Exterior Lighting

- Exterior garden spike lights
- Input voltage: 12V
- Material: powder coated aluminium
- Lamp holder: MR16 (Max.20W)
- Globe not included
- Flex: 1000mm
- External control gear required
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector





KAM01
(Dark Grey)


Part No.	Description	Colour	Lamp Holder	Max. Watt	Carton QTY
KAM01	SPIKE/HOOD (Dark Grey) 20W MR16 IP65	Dark Grey	1xMR16	20W	1/12

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Pond Spot Light Exterior Lighting

- Surface mount adjustable pond/ spot light
- Input voltage: 12-24V
- External control gear required
- Material: 316 stainless steel
- Lamp holder: MR16 (Max.35W)
- Globe not included
- IP rating: IP68
- Flex: 900mm
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

MR16 | IP68 Rated | 2 YEAR Replacement Warranty






SMIP68ASS

Part No.	Description	Colour	Lamp Holder	Max. Watt	Carton QTY
SMIP68ASS	SPOT 12V MR16 35W S/M SS316 (5mm tempered glass)	Stainless steel	1xMR16	35W	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

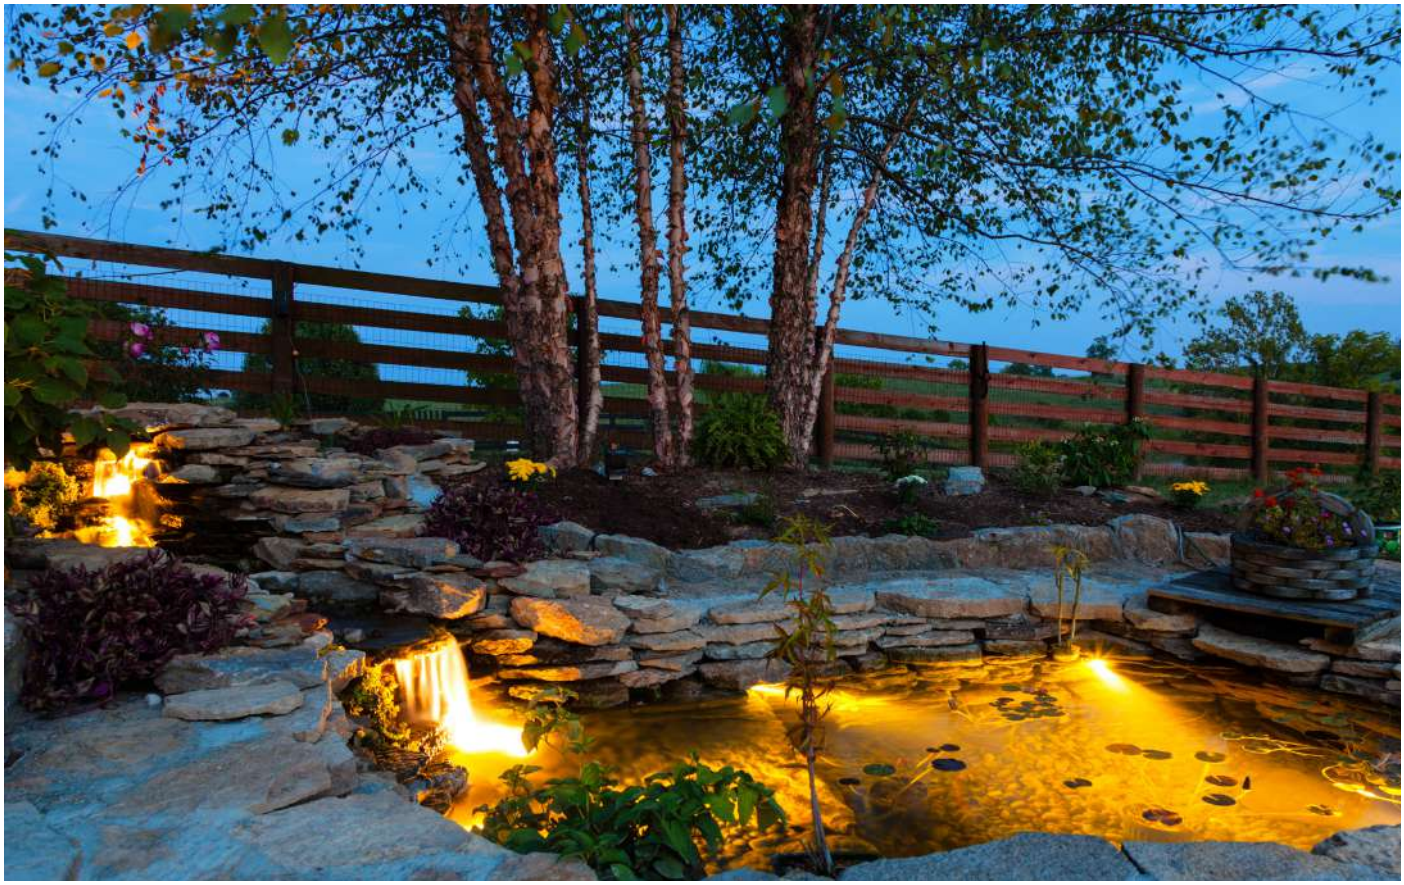


Deck Exterior Lighting LED





DECK01 & DECK02
(316 Stainless Steel)





DECK03 & DECK04
(Copper)

- Exterior LED deck lights
- Input voltage range: 9-14V DC
- Faceplate: 316 stainless steel / copper
- Housing: aluminium
- Diffuser: PVC
- Flex: 900mm
- LED chip: 1pc Brightlux 45mil
- Power factor: 0.98
- CRI: 80
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- External control gear required
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

30,000hr Lifetime | 30^{0} Beam Angle | IP67 Rated | 2YEAR Replacement Warranty



Part No.	Description	Colour	Kelvin	Lumens	Watt	CRI	Cut out	Carton QTY
DECK01	DECK LIGHT LED 3000K 12V 3W 43mm	Stainless Steel	3000K	160LM	3W	80	Ø43mm	1/50
DECK02	DECK LIGHT LED 6000K 12V 3W 43mm	Stainless Steel	6000K	180LM	3W	80	Ø43mm	1/50
DECK03	DECK LIGHT LED 3000K 12V 3W 43mm	Natural Copper	3000K	160LM	3W	80	Ø43mm	1/50
DECK04	DECK LIGHT LED 6000K 12V 3W 43mm	Natural Copper	6000K	180LM	3W	80	Ø43mm	1/50

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

GU10 Inground Up Lights Exterior Lighting






IGGLSQSS
(316 Stainless Steel)



IGGLSS
(316 Stainless Steel)

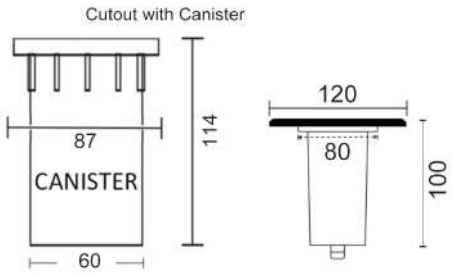

- Exterior recessed inground up lights
- Input voltage: 240V AC
- Faceplate: 316 stainless steel
- Housing: aluminium
- Lamp holder: GU10 (Max.35W)
- Globe not included
- Plastic sleeve included (must be installed)
- Fitting slides and screws into sleeve
- Cable included (L950mm)
- 8mm tempered glass, max load capacity 600kg
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

GU10 | IP67 Rated | 2YEAR Replacement Warranty



Part No.	Description	Colour	Lamp Holder	Max. Watt	Faceplate	Carton QTY
IGGLSQSS	INGROUND / WALL GU10 SS316 LGE SQ	316 SS clear anodized	1xGU10	35W	120x120mm	1/10
IGGLSS	INGROUND / WALL GU10 SS316 LGE RND	316 SS clear anodized	1xGU10	35W	Ø120mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Inground Up Lights





IGMLSQBR
(Solid Brass)



IGMLBR
(Solid Brass)



IGMLSQC
(Solid Copper)



IGMLC
(Solid Copper)




IGMLSQSS
(316 Stainless Steel)



IGMLSS
(316 Stainless Steel)

- Exterior recessed inground up lights
- Input voltage range: 12-25V DC / AC
- External Control Gear Required
- Housing: aluminium
- Faceplate: 316 Stainless steel, solid copper/solid brass
- Lamp holder: MR16 (Max.20W)
- Globe not included
- Plastic sleeve included (must be installed)
- Fitting slides and screws into sleeve
- Cable included (L950mm)
- 8mm tempered glass, max load capacity 600kg
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector



MR16 | IP67 Rated | 2 YEAR Replacement Warranty

Part No.	Description	Colour	Lamp Holder	Max. Watt	Faceplate	Carton QTY
IGMLBR	INGROUND / WALL MR16 12V Brass LGE RND	Rustic Brass	MR16	20W	Ø120mm	1/20
IGMLC	INGROUND / WALL MR16 12V COP LGE RND	Polished Copper	MR16	20W	Ø120mm	1/20
IGMLSS	INGROUND / WALL MR16 12V SS316 LGE RND	316 SS clear anodized	MR16	20W	Ø120mm	1/20
IGMLSQBR	INGROUND / WALL MR16 12V Brass LGE SQ	Rustic Brass	MR16	20W	120x120mm	1/20
IGMLSQC	INGROUND / WALL MR16 12V COP LGE SQ	Polished Copper	MR16	20W	120x120mm	1/20
IGMLSQSS	INGROUND / WALL MR16 12V SS316 LGE SQ	316 SS clear anodized	MR16	20W	120x120mm	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Inground Up Lights Exterior Lighting





IGM1SS
(1 Way)




IGM2SS
(2 Way)



IGML3SS
(3 Way)



IGML4SS
(4 Way)



- Exterior recessed inground up lights
- Input voltage range: 12-25V DC / AC
- External Control Gear Required
- Housing & faceplate: 316 Stainless steel
- Lamp holder: MR16 (Max.20W)
- Globe not included
- Plastic sleeve included (must be used when installing in concrete)
- Fitting slides into sleeve and remains unattached
- Cable included (L950mm)
- 4mm tempered glass, max load capacity 100kg
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

MR16 | IP67 Rated | 2 YEAR Replacement Warranty



Part No.	Description	Colour	Lamp Holder	Max. Watt	Faceplate	Carton QTY
IGM1SS	INGROUND / WALL 1 WAY MR16 12V SS316 RND	316 SS	1xMR16	20W	Ø90mm	1/20
IGM2SS	INGROUND / WALL 2 WAY MR16 12V SS316 RND	316 SS	1xMR16	20W	Ø90mm	1/20
IGM3SS	INGROUND / WALL 3 WAY MR16 12V SS316 RND	316 SS	1xMR16	20W	Ø90mm	1/20
IGM4SS	INGROUND / WALL 4 WAY MR16 12V SS316 RND	316 SS	1xMR16	20W	Ø90mm	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

MR16 Inground Up Lights





IGMEYESS
(Eyelid / 316 Stainless Steel)



IGMGRSS
(Grilled / 316 Stainless Steel)




IGMSMC
(Round / Copper)




IGMSMSS
(Round / 316 Stainless Steel)

- Exterior recessed inground up lights
- Input voltage range: 12-25V AC/DC
- External Control Gear Required
- Housing: 316 Stainless steel/ solid copper
- Faceplate: 316 Stainless steel/ solid copper
- Lamp holder: MR16 (Max.20W)
- Globe not included
- Plastic sleeve included (must be used when installing in concrete)
- Fitting slides into sleeve and remains unattached
- Cable included (L950mm)
- To maintain the IP rating please use circular cable in junction. For parallel and single connection we recommend using an appropriate IP68 connector

MR16 | IP67 Rated | 2 YEAR Replacement Warranty



IGMEYE



IGMSM & IGMGRSS

IGMEYESS	4mm Tempered Glass. Max load capacity 100Kg
IGMSMC	4mm Tempered Glass. Max load capacity 600Kg
IGMSMSS	4mm Tempered Glass. Max load capacity 600Kg
IGMGRSS	4mm Tempered Glass. Max load capacity 600Kg

Part No.	Description	Colour	Lamp Holder	Max. Watt	Faceplate	Carton QTY
IGMEYESS	INGROUND / WALL EYELID MR16 12V 316 SS RND	316 SS	1xMR16	20W	Ø88mm	1/20
IGMSMC	INGROUND / WALL MR16 12V COP SM RND	Polished Copper	1xMR16	20W	Ø90mm	1/20
IGMSMSS	INGROUND / WALL MR16 12V 316 SS SM RND	316 SS	1xMR16	20W	Ø90mm	1/20
IGMGRSS	INGROUND / WALL Grilled MR16 12V SS316 RND	316 SS	1xMR16	20W	Ø90mm	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

SMTFlood Exterior Lighting

SMART LIGHTS LED

NO HUB REQUIRED

- Input voltage range: 220-240V 50/60Hz
- Inbuilt constant current LED driver included
- Housing: powder coated aluminium
- Heatsink: aluminium
- Diffuser: glass
- LED chips: SMD2835
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -20 to 40°C
- Flex & Plug: 1.2m
- App: control all functions via Tuya app on smart devices
- Manual: on/off control via normal wall switch
- Dimmable only via app or voice control through Amazon Alexa, Google Home and other compatible voice activated control devices (Not compatible with wall switch dimmer)
- Setup requires WiFi with Internet connection
- Suitable for 2-way switching
- Not suitable for use with sensor

30,000hr Lifetime | 110° Beam Angle | IP65 Rated | DIMMABLE | 3 YEAR Replacement Warranty




SMTFLOOD1 & SMTFLOOD2


Additional SMART Features:

- Tuneable RGB colour spectrum (up to 14 million colours)
- Colour temperature: 5000K
- Works with any 2.4GHz enabled WiFi network (note: will not currently pair with 5.0GHz bandwidth.)
- Create schedules plans, Biorhythm and timing to automate your home
- Ability to set power-on behaviour
- Control from anywhere via app or voice control using Alexa Hubs, Google Home and other compatible devices
- Compatible with all Tuya Powered apps

Google Assistant | amazon alexa



SMTFLOOD1



SMTFLOOD2

Tuya Smart
Formal version

Part No.	Description	Kelvin	Lumens	Watt	Product Dimensions	Carton QTY
SMTFLOOD1	FLOOD LED SMART Blk Dimm 5K+RGB 10W	5000K	800LM	10W	152x125x28mm	1/20
SMTFLOOD2	FLOOD LED SMART Blk Dimm 5K+RGB 30W	5000K	2400LM	30W	209x168x30mm	1/20

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Security Flood Light

Exterior Lighting

LED Tri-CCT






SEC11S



- LED Tri-CCT adjustable security light with sensor
- Input voltage: 220-240V 50/60Hz
- Housing, faceplate & heatsink: plastic
- Diffuser: clear glass
- LED chips: 48pcs(3000K) + 48pcs (6500K) SMD2835
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- Power Factor: >0.9
- CRI: >80
- Beam angle: 270^0 ($3x90^0$)
- Adjustable / Tilt / Swivel: 270^0
- Ambient temperature: -20 to 40^0C
- Not suitable for dimming
- Suitable for 2 way switching
- Double insulated

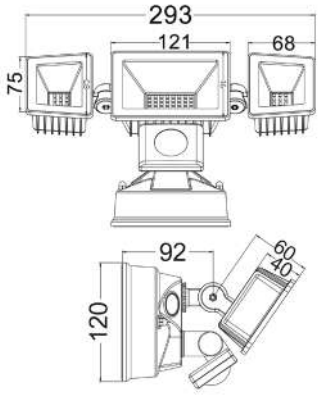

Sensor Technical Spec:

- Sensor type: PIR
- Wattage / power consumption: <0.5W
- Installation height: 1.8-3.5m
- Detection angle: 140^0 Max
- Motion detection speed: 1.5m/s
- Time delay: 8secs to 9mins
- UV resistant: yes
- Manual override: yes



Part No.	Description	Lumens			Watt	PF	CRI	Carton QTY
		3000K	4000K	6500K				
SEC11S	SECURITY S/M 30W LED TRI Blk w/sensor	2700LM	3000LM	2800LM	10W	>0.9	>80	1/12

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*


Flood Exterior Lighting LED

- LED slim flood lights
- Input voltage: 240V 50/60Hz
- Housing: PC
- Bracket: aluminium
- LED chips: SMD 2835
- Power factor: ≥0.9
- Flex & plug not included
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with Microwave or PIR sensors






FLOOD15 & FLOOD16



FLOOD15



FLOOD16

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
FLOOD15	FLOOD LED BLK P/C (aluminum bracket) 15W	5000K	1200LM	15W	80	148x198x52mm	1/10
FLOOD16	FLOOD LED BLK P/C (aluminum bracket) 30W	5000K	2200LM	30W	80	179x227x52mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*

Shield Exterior Lighting

LED Tri-CCT




SHIELDTRI1 & SHIELDTRI2




Back plate

- Exterior LED waterproof **DUAL POWER TRI-CCT** battens
- Input voltage range: 220-240V 50Hz
- Inbuilt Constant Current LED driver
- Housing & diffuser: PC
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- Tri-CCT switch on internal driver
- Wattage switch inside driver
- LED chips: 120pcs or 240pcs SMD2835
- CRI: >80
- Power factor: 0.9
- Ambient temperature: -20 to 40^{0}C
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors
- Includes: 2xMounting brackets(SS grade 304); 1xConnector(IP65)





SHIELDTRI1



SHIELDTRI2

Part No.	Description	Lumens						Dimensions	Carton QTY
		3000K		4000K		5000K			
		9W	18W	9W	18W	9W	18W		
SHIELDTRI1	BATTEN LED S/M TRIP-ROOF 9W/18W	800LM	1600LM	1000LM	2000LM	900LM	1800LM	600x80x75 mm	1/10
		18W	36W	18W	36W	18W	36W		
SHIELDTRI2	BATTEN LED S/M TRIP-ROOF 18W/36W	1750LM	3500LM	2000LM	4000LM	1850LM	3700LM	1200x80x75 mm	1/10

**To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.*



GENERAL LIGHTING | **DOWNLIGHTS**


Tele Downlights - LED Recessed

LED Tri-CCT






TELE1



Retractable In / Out: 60mm
Swivel: 355⁰
Adjustable Angle: 80⁰

- LED recessed retractable dimmable spot downlight
- Input voltage: 220-240V AC
- External Constant Current LED driver
- Housing: Powder coated Aluminium
- Heatsink: Aluminium
- Diffuser: PC
- Tri-CCT (3000K/ 4000K/ 6000K) in one fitting
- CCT switch on driver
- LED chip: 1pc COB
- CRI: >80
- Power factor: 0.9
- Ambient temperature: -20 to 40°C
- Flex & plug: 0.6m
- Suitable for dimming
- **Convertible white plate (to support TELE1 to fit 90mm cut out) is also available** (sold separately)

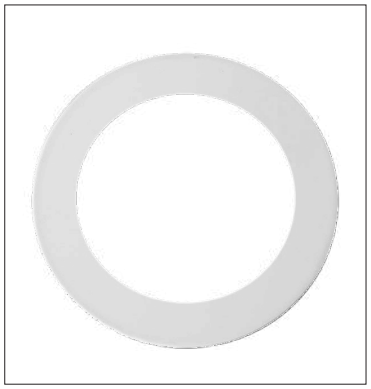

TELEPLATE1
(Convertible Plate for 90mm Cut out)

IP20 Rated | 30⁰ Beam Angle | 30,000hr Lifetime | 3YEAR Replacement Warranty | DIMMABLE

Tested and Recommended Dimmers:

Brand	Part No.
CLA	LYNX1, VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM
DIGINET	MEDM, MMDM/RT
HPM	CAT250T, CAT400T

Part No.	Description	Lumens			Watt	Dimensions	Cut Out	Carton QTY
		3000K	4000K	5700K				
TELE1	D/L LED GIMBAL DIMM WH RND Tri	640LM	720LM	720LM	8W	Ø111x32.7mm	Ø90mm	1/40
TELEPLATE1	D/L Convertible plate (Support TELE1 to fit into a 90mm hole) WH OD 115mm					Ø115mm		

GENERAL

Tubo Downlights - LED Recessed

LED Tri-CCT







TUBO1



TUBO2

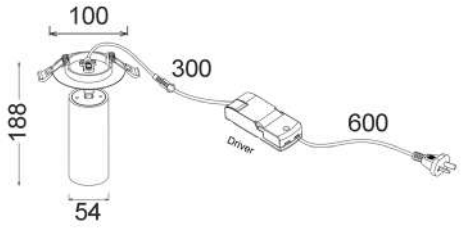

- LED recessed Tri-CCT tiltable & rotatable spot downlights
- Input voltage: 220-240V AC 50/60Hz
- External Constant Current LED driver
- Diffuser: PC
- Housing & heatsink: aluminium
- Tilt: 90° / Swivel: 355°
- LED chips: 1pc COB
- Tri-CCT (3000K/ 4000K/ 6000K) in one fitting
- CCT switch on driver
- Power factor: 0.9
- CRI: 80
- Flex & plug: 0.6m
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor

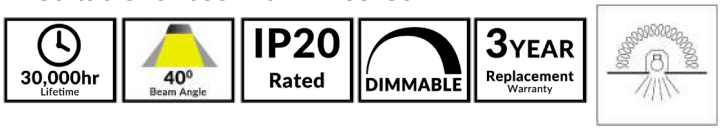



Tested and Recommended Dimmers:

Brand	Part No.
CLA	LYNX1, VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM
DIGINET	MEDM, MMDM/RT
HPM	CAT250T, CAT400T

Part No.	Description	Lumens			Watt	Housing	Cut Out	Carton QTY
		3000K	4000K	6000K				
TUBO1	D/L Adjustable DIMM Spot WH Tri	800LM	850LM	820LM	10W	Ø54x125mm	Ø70-90mm	1/20
TUBO2	D/L Adjustable DIMM Spot BLK Tri	800LM	850LM	820LM	10W	Ø54x125mm	Ø70-90mm	1/20

Gal Downlights - LED Recessed

LED Tri-CCT









GALTRI01A & GALTRI02A

- LED dimmable Tri-CCT recessed downlights
- Input voltage: 220-240V
- Remote dimmable driver included
- Housing & heatsink: plastic & aluminium
- Diffuser: frosted PC
- Faceplate: PBT
- LED chip: SMD2835
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on driver
- CRI: ≥ 80
- Power factor: >0.9
- Flex & plug: 600mm
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors

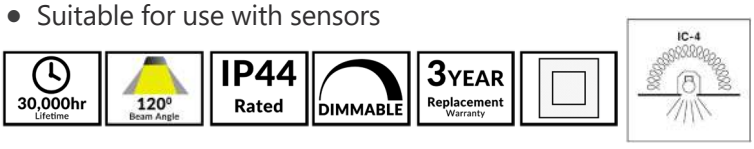



Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32E450TM, 32ELEDM
HPM	CAT400T
DIGINET	MEDM, MMDM/RT

Part No.	Description	Lumens			Watt	CRI	Power Factor	Dimensions	Cut out	Carton QTY
		3000K	4000K	5700K						
GALTRI01A	D/L FIXED DIMM 10W RND WH Tri	750LM	850LM	750LM	10W	≥ 80	0.9	Ø113x40mm	Ø90mm	1/40
GALTRI02A	D/L FIXED DIMM 10W RND WH Tri	900LM	1020LM	900LM	12W	≥ 80	0.9	Ø113x40mm	Ø90mm	1/40

Comet Downlights - LED Recessed

LED Tri-CCT





TRI-CCT switch on rear



COMET01
(Black / Low Glare)



COMET03
(White / Low Glare)




COMET02
(Brushed Nickel)




COMET04
(White)

- LED recessed Tri-CCT dimmable centre tilt downlights
- Input voltage range: 185-265V AC 50/60Hz
- Constant current LED driver included
- Material: aluminium body & PMMA lens
- Heatsink: aluminium
- Centre tilt: 25^0
- Tri-CCT (3000K/ 4200K/ 6000K) in one fitting
- LED chips: 1pc COB LED
- Power factor: ≥0.9
- Ambient temperature: -20 to 40^{0}C
- Flex & plug: COMET01&03: 1640mm;
  COMET02&04: 1460mm
- Suitable for 2-way switching
- Suitable for dimming
- Suitable for 3 wire motion/ microwave sensors





COMET01 & 03



COMET02 & 04

Tested & Recommended Dimmers:

Brand	Part No.
Diginet	MEDM & MMDM/RT
CLIPSAL	32ELEDM-WE, 32E450TM, 32E450LM, 32E450UDM & 31E2PUDM
HPM	CAT250L, CAT250T & CAT400T

Part No.	Description	Lumens			Watt	CRI	Diam	Depth	Cut Out	Carton QTY
		3000K	4200K	6000K						
COMET01	D/L LED DIMM C/TILT MATTE BL RND LOW GLARE Tri	750LM	850LM	800LM	10W	80	Ø100mm	107mm	Ø90mm	1/24
COMET02	D/L LED DIMM C/TILT MATTE Brushed Nickel Tri	800LM	900LM	850LM	10W	80	Ø100mm	85mm	Ø70-90mm	1/24
COMET03	D/L LED DIMM C/TILT MATTE WH RND LOW GLARE Tri	750LM	850LM	800LM	10W	80	Ø100mm	107mm	Ø90mm	1/24
COMET04	D/L LED DIMM C/TILT WH RND Tri	800LM	900LM	850LM	10W	80	Ø100mm	85mm	Ø70-90mm	1/24





COMET05
(Fixed)



COMET06
(Fixed)




COMET07
(Gimbal Tilt: 30⁰)



COMET08
(Gimbal Tilt: 30⁰)

- LED dimmable low glare Tri-CCT downlights
- Input voltage: 220-240V AC
- Inbuilt constant current LED driver included
- Housing & heatsink: plastic & aluminium
- Diffuser: PC
- Tri-CCT (3000K/ 4000K/ 6000K) in one fitting
- Rear switch
- CRI: ≥80
- Power factor: 0.9
- Flex & plug: 1m
- Ambient temperature: -20 to 40⁰C
- Suitable for dimming
- Suitable for 2-way switching
- COMET05-06: IP20 (IP54 for front face only)
- COMET07-08: IP20






COMET05-06



COMET07-08



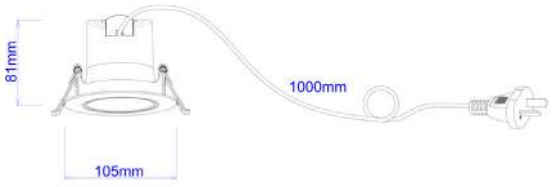

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM
HPM	CAT250T, CAT400T
DIGINET	MEDM

Part No.	Description	Lumens			Watt	Dimensions	Cut Out	Carton QTY
		3000K	4000K	6000K				
COMET05	D/L LED FIXED DIMM BLK RND Low Glare COB TRI	700LM	800LM	750LM	9W	Ø100x85mm	Ø85-90mm	1/45
COMET06	D/L LED FIXED DIMM WH RND Low Glare COB TRI	700LM	800LM	750LM	9W	Ø100x85mm	Ø85-90mm	1/45
COMET07	D/L LED GIMBAL DIMM BLK RND Low Glare COB TRI	700LM	800LM	750LM	9W	Ø105x85mm	Ø90mm	1/45
COMET08	D/L LED GIMBAL DIMM WH RND Low Glare COB TRI	700LM	800LM	750LM	9W	Ø105x85mm	Ø90mm	1/45

SMTNova Downlights - LED Recessed

SMART LIGHTS | LED


NO HUB REQUIRED



SMTNOVA1

- LED SMART dimmable Tri-CCT + RGB downlight
- Input voltage range: 220-240V 50Hz
- Inbuilt constant current LED driver included
- Housing: plastic & aluminium
- Faceplate: PC
- Heatsink: aluminium
- Frosted Diffuser
- LED chips: SMD2835
- CRI: ≥80
- Power factor: ≥0.5
- Ambient temperature: -20 to 40°C
- Flex & Plug: 1m
- **App: control all functions via Tuya app on smart devices**
- **Manual: on/off control via normal wall switch**
- **Dimmable only via app or voice control through Amazon Alexa, Google Home and other compatible voice activated control devices (Not compatible with wall switch dimmer)**
- Setup requires WiFi with Internet connection
- Suitable for 2-way switching
- Not suitable for use with sensor

30,000hr Lifetime | 90° Beam Angle | IP44 Rated | DIMMABLE | 3YEAR Replacement Warranty | IC-4



Additional SMART Features:

- Tuneable RGB colour spectrum (up to 14 million colours)
- Tuneable colour temperature (3000K warm white through to 6500K daylight)
- Works with any 2.4GHz enabled WiFi network (note: will not currently pair with 5.0GHz bandwidth or Bluetooth LE 4.2
- Create schedules and timing to automate your home
- Control from anywhere via app or voice control using Alexa Hubs, Google Home and other compatible devices
- Compatible with all Tuya Powered apps

Google Assistant | amazon alexa

Tuya Smart
Formal version

Scan QRCode to download

Part No.	Description	Kelvin	Lumens	Watt	Product Dimensions	Cut Out	Carton QTY
SMTNOVA1	D/L LED SMART WH RND DIMM TRI+RGB	RGB+ 3000-6500K	750LM - 3000K 820LM - 6500K 60LM - Red 45LM - Blue 190LM - Green	9W	Ø115x58mm	Ø90mm	1/48

GENERAL

Firefly Downlights - LED Recessed

LED Tri-CCT






FIREFLY01A
CENTRE TILT: 20⁰



REAR CCT SWITCH

- LED gimbal white dimmable Tri-CCT recessed downlight
- Input voltage: 220-240V
- External Constant Current LED driver included
- Degree of tilt: 20⁰
- Housing & heatsink: plastic & aluminium
- Diffuser: clear PC
- Faceplate: plastic
- LED chip: 1pc COB
- Tri-CCT changeable: 3000K/ 4000K/ 5700K
- Rear switch
- CRI: >80
- Power factor: >0.9
- Flex & plug: 0.6m
- Ambient temperature: -20 to 40⁰C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

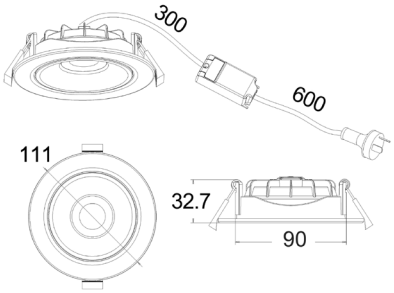

Tested & recommended dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32E450TM, 32ELEDM
HPM	CAT400T
DIGINET	MEDM, MMDM/RT



Part No.	Description	Lumens			Watt	Dimensions	Cut Out	Carton QTY
		3000K	4000K	5700K				
FIREFLY01A	D/L LED GIMBAL DIMM WH RND Tri	640LM	720LM	720LM	8W	Ø111X32.7mm	Ø90mm	1/40

GENERAL

Novadlux Downlights - LED Recessed

LED Tri-CCT



NOVADLUX01A Box Include:

- 1x Downlight (NOVADLUX01A) with white faceplate
- 1x Loose Satin Chrome faceplate



NOVADLUX01A




Satin Chrome Faceplate

Available faceplates (Sold Separately):

- Matte Black (NOVADBLK01A)
- Antique Brass (NOVADBR01A)




NOVADBR01A




NOVADBLK01A

- LED dimmable Tri-CCT with changeable faceplate (via clip) recessed downlights
- Input voltage range: 220-240V 50/60Hz
- Inbuilt constant current driver included
- Housing: aluminium & plastic
- Faceplate: powder coated aluminium
- Diffuser: frosted PC
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on side
- LED chip: 24pcs SMD2835
- Power factor: 0.9
- CRI: ≥ 80
- Flex & plug: 600mm
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors





NOVADLUX01A Line Drawing



Faceplate Line Drawing

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32E450TM
HPM	CAT400T
DIGINET	MEDM, MMDM/RT

Part No.	Description	Lumens			Watt	Dimensions	Cut Out	Carton QTY
		3000K	4000K	5700K				
NOVADLUX01A	D/L LED COB FIXED WH+S/C DIMM RND TRI	800LM	950LM	850LM	10W	Ø113x55mm	Ø90mm	1/40
NOVADBLK01A	FACEPLATE TO SUIT NOVADLUX01A MATTE BLK Ø113mm							
NOVADBR01A	FACEPLATE TO SUIT NOVADLUX01A ANTIQUE BRASS Ø113mm							




NOVADLUX02 Box Include:

- 1x Downlight (NOVADLUX02) with white faceplate
- 1x Loose Satin Chrome (NOVADSC02) faceplate



NOVADLUX02



NOVADSC02

Available faceplates (Sold Separately):

- Matte Black (NOVADBLK02)
- Antique Brass (NOVADBR02)





NOVADBR02




NOVADBLK02

- LED dimmable Tri-CCT with changeable faceplate (via clip) recessed downlights
- Input voltage range: 220-240V 50/60Hz
- Inbuilt constant current driver included
- Housing: aluminium & plastic
- Faceplate: White: plastic; Satin chrome, matte black & brass: aluminium
- Diffuser: frosted PC
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on side
- LED chip: 20pcs SMD2835
- Power factor: 0.9
- CRI: ≥ 80
- Flex & plug: 600mm
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors

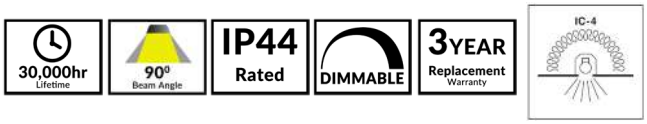

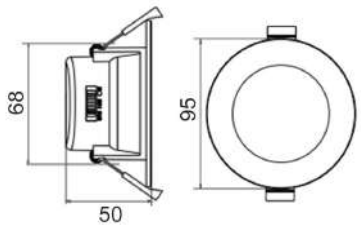

NOVADLUX02 Line



Faceplate Line

Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32E450TM
HPM	CAT400T
DIGINET	MEDM, MMDM/RT

Part No.	Description	Lumens			Watt	Dimensions	Cut Out	Carton QTY
		3000K	4000K	5700K				
NOVADLUX02	D/L LED FIXED WH+S/C DIMM RND TRI	640LM	720LM	680LM	8W	Ø95x50mm	Ø70mm	1/50
NOVADBLK02	FACEPLATE TO SUIT NOVADLUX02 MATTE BLK OD 95mm							
NOVADBR02	FACEPLATE TO SUIT NOVADLUX02 ANTIQUE BRASS OD 95mm							

Novatris Downlights - LED Recessed


LED Tri-CCT






NOVATRIS

- LED Tri-CCT motion sensor downlight
- Input voltage: 220-240V 50Hz
- Inbuilt constant current driver included
- Housing & heatsink: plastic & aluminium
- LED chips: SMD2835
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- Rear switch
- Power factor: 0.9
- CRI: ≥ 80
- Flex & plug: 1.0m
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching

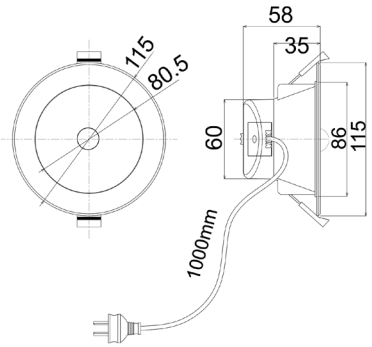

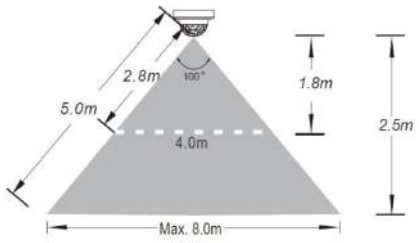

Sensor Technical Spec:

- Sensor type: PIR
- Wattage / power consumption: <0.5W
- Installation height: 1.8-2.5m
- Detection angle: 360^0
- Motion detection speed: 1.5m/s
- Time delay: 70 ± 10s
- UV resistant: Yes
- Manual override: No



Recommended Height of Installation: 1.8-2.5m
Detection Distance: Max. 8m
Height: 1.8M = 4 meter detection range
Height: 2.5M = 8 meter detection range
***Note: The detection distance will vary with change of installation height**

Part No.	Description	Lumens			Watt	CRI	Dimensions	Cut out	Carton QTY
		3000K	4000K	5000K					
NOVATRIS	D/L LED FIXED DIMM MOTION SENSOR WH RND TRI	750LM	850LM	800LM	9W	80	Ø115x58mm	Ø90mm	1/48

GENERAL


Motion Downlights - LED Recessed

LED






MOTION1-4

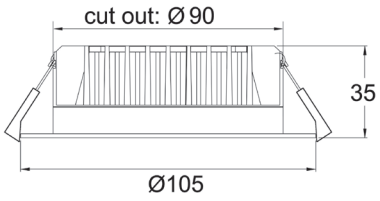

MOTION1 & 3

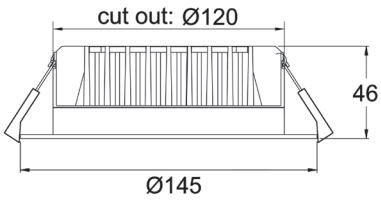


MOTION2 & 4

- LED recessed motion sensor downlights
- Input voltage range: 180-260V AC 50/60Hz
- Constant current LED driver included
- Material: aluminium & PC
- LED chips: SMD2835 LED
- Power factor: >0.5
- CRI: >80

Sensor Technical Spec:

- Sensor type: PIR
- Max.detection diameter radius: 5m
- Sensor time delay: 90 seconds
- Detection range: 80^0
- Block time: 0.2 seconds
- Flex & plug: 1200mm
- Ambient temperature: -20 to 45^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Sensor operates Day and Night (No Manual Override)



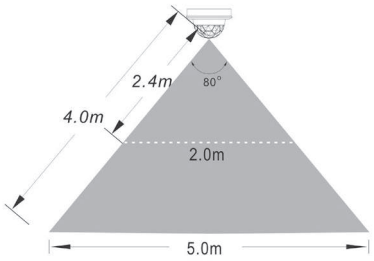

Applications:

Great design. Suitable for hallway, laundry room, living room and most indoor locations.

Part No.	Kelvin	Lumens	LED Chips	Watt	CRI	Diam	Depth	Cut Out	Carton QTY
MOTION1	3000K	800LM	24pcs 2835	10W	>80	Ø105mm	35mm	Ø90mm	1/36
MOTION2	3000K	1200LM	36pcs 2835	15W	>80	Ø145mm	46mm	Ø120mm	1/24
MOTION3	5000K	850LM	24pcs 2835	10W	>80	Ø105mm	35mm	Ø90mm	1/36
MOTION4	5000K	1250LM	36pcs 2835	15W	>80	Ø145mm	46mm	Ø120mm	1/24


Cosmo Downlights - LED Recessed

LED Tri-CCT







COSMOTRI03-05

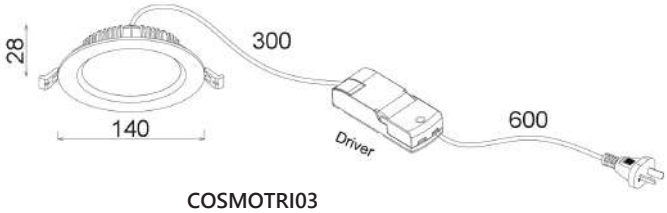

COSMOTRI03

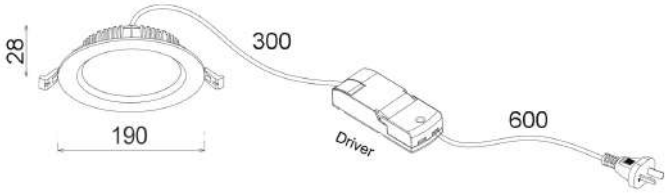


COSMOTRI04

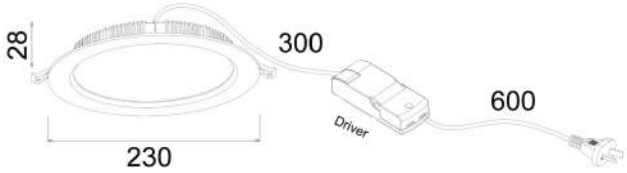

COSMOTRI05

- Input voltage: 220-240V AC 50/60Hz
- External constant current LED driver included
- Housing & heatsink: plastic & aluminium
- Diffuser: Opal PC
- Faceplate: PBT
- Power factor: 0.9
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on driver
- LED chips: SMD2835
- CRI: ≥ 80
- Flex & plug: 600mm
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensor

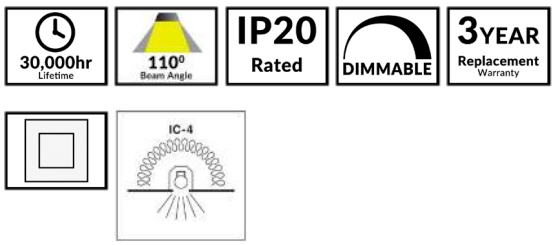

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM,
HPM	CAT250T, CAT400T
DIGINET	MEDM, MMDM/RT

Part No.	Lumens			Watt	CRI	Power Factor	Dimensions	Cut out	Carton QTY
	3000K	4000K	5700K						
COSMOTRI03	1200LM	1350LM	1250LM	15W	≥ 80	0.9	Ø140x28mm	Ø110-120mm	1/30
COSMOTRI04	1800LM	2000LM	1900LM	20W	≥ 80	0.9	Ø190x28mm	Ø155-170mm	1/20
COSMOTRI05	2250LM	2500LM	2375LM	25W	≥ 80	0.9	Ø230x28mm	Ø195-210mm	1/20

Slick Downlights - LED Recessed

LED Tri-CCT







SLICKTRI1-3R
(Round)




SLICKTRI1-3S
(Square)

- LED dimmable ultra slim Tri-CCT recessed downlights
- Input voltage range: 220-240V
- Remote constant current driver included
- Housing & faceplate: PC
- Diffuser: white PS
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- CCT switch on DC cable
- LED chips: SMD2835
- Power factor: 0.9
- CRI: >80
- Flex & plug: 1.2m
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with Microwave/ motion sensor
- Recommended usage: 8-10 hours/day
- The driver should NOT BE covered with thermal insulation







SLICKTRI1R




SLICKTRI1S




SLICKTRI2R



SLICKTRI2S



SLICKTRI3R



SLICKTRI3S

Tested & Recommended Dimmers:


Brand	Part No.
CLA	VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDDWE, 32E450TM, PDL354PBDMUN-VW
HPM	Cat 250T, Cat 400T
DIGINET	MEDM, MMDM/RT

Part No.	Shape	Lumens			Watt	Dimensions	Driver Size	Switch Size	Carton QTY
		3000K	4000K	5000K					
SLICKTRI1R	Round	630LM	720LM	680LM	9W	Ø150x22mm	80x31x20mm	45x23x15mm	1/40
SLICKTRI2R	Round	840LM	960LM	900LM	12W	Ø175x22mm	87x37x20mm	45x23x15mm	1/40
SLICKTRI3R	Round	1350LM	1550LM	1450LM	18W	Ø222x22mm	87x37x20mm	45x23x15mm	1/20
SLICKTRI1S	Square	630LM	720LM	680LM	9W	150x150x22mm	80x31x20mm	45x23x15mm	1/40
SLICKTRI2S	Square	840LM	960LM	900LM	12W	175x175x22mm	87x37x20mm	45x23x15mm	1/40
SLICKTRI3S	Square	1350LM	1550LM	1450LM	18W	222x222x22mm	87x37x20mm	45x23x15mm	1/20





SHOPTRI01
(Power switch & CCT switch on rear)



- LED gimabl white recessed shop lighter downlight
- 6 fittings in 1: Dual power & Tri-CCT changeable
- Input voltage: 220-240V AC 50/60Hz
- Remote Constant Current driver included
- Degree of tilt: 50^0
- Housing & heatsink: aluminium
- Diffuser: Textured clear glass
- Faceplate: powder coated aluminium
- Dual power: 28W/ 38W
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- Rear switches
- Power factor: 0.94
- LED chips: SMD2835
- CRI: ≥ 80
- Flex & plug: 1500mm
- Ambient temperature: -20 to 40^0C
- Not suitable for dimming
- Suitable for use with PIR/ Microwave sensors



Part No.	Lumens						Dimensions	Cut Out	Carton QTY
	3000K		4000K		5700K				
	28W	38W	28W	38W	28W	38W			
SHOPTRI01	2426LM	3270LM	2800LM	3800LM	2460LM	3300LM	Ø195X135mm	Ø165mm	1/12






SHOPTRI
(CCT switch on DC cable)

- LED gimbal dimmable Tri-CCT rectangular shop lighter
- Input voltage: 200-240V AC 50/60Hz
- External constant current dimmable driver included
- Housing: white powder coated aluminium
- Textured clear glass diffuser
- Mounting plate & heatsink: aluminium
- Surface mounted or recessed
- Adjustable: 90^0
- Tri-CCT (3000K / 4000K / 5700K) switch on DC cable
- LED chips: SMD2835
- Power factor: 0.95
- CRI: ≥ 80
- Flex & plug: 1200mm
- Ambient temperature: -20 to 40^0C
- Mounting bracket: L 222mm x W 28.2mm
- Suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR/ Microwave sensors



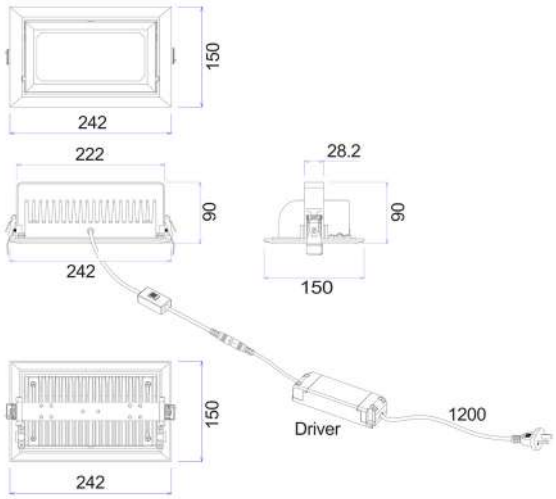

Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32ELEDM, 32E450UDM, 31E2PUDM
HPM	CAT250, CAT250T, CAT400T
DIGINET	MMDM/RT, MEDM

Part No.	Description	Lumens			Watt	Power Factor	Dimensions	Cut Out	Carton QTY
		3000K	4000K	5700K					
SHOPTRI	D/L LED SHOP GIMBAL DIMM WH RECT 35W TRI	2900LM	3200LM	3000LM	35W	0.95	242x150x-90mm	230x130mm	1/6


Surface (LED) Downlights - Surface Mounted

LED





SURFACE13-14



- LED surface mounted ceiling downlights
- Input voltage range: 220-240V AC 50/60Hz
- Constant current LED driver included
- Housing & heat sink: aluminium
- Bracket: aluminium
- LED chips: 1pc COB
- Power factor: ≥0.9
- CRI: ≥80
- Ambient temperature: -20 to 40°C
- 150mm 3 core cable without plug
- Suitable for dimming
- Recommended Universal trailing edge & leading edge dimmers
- Suitable for 2-way switching
- Suitable for use with PIR sensors





Tested & Recommended Dimmers:

Brand	Part No.
HPM	CAT250L, CAT250T, CAT400T
CLIPSAL	32ELEDM, 31E2PUDM, 32E450UDM, 32E450LM

Part No.	Description	Kelvin	Lumens	Watt	CRI	Barrell	Carton QTY
SURFACE13	D/L DIMM LED S/M WHITE GLOSS RND	3000K	800LM	13W	≥80	Ø105x146mm	1/12
SURFACE14	D/L DIMM LED S/M WHITE GLOSS RND	5000K	900LM	13W	≥80	Ø105x146mm	1/12

Surface (GU10) Downlights - Surface Mounted





SURFACE17A



SURFACE18A



SURFACE22



SURFACE23




SURFACE24



SURFACE25

- GU10 surface mounted downlights
- Input voltage range: 220-240V
- Housing: powder coated aluminium
- Mounting plate: aluminium
- Fitting colours: matte black and matte white
- SURFACE22-25: 15^{0}C tilt/ adjustable
- Lamp holder: GU10 (Max.50W)
- Globe not included
- Flex & plug not included

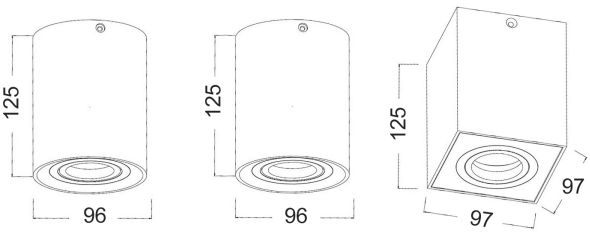

GU10 | IP54 Rated | 1 YEAR Replacement Warranty

Part No.	Description	Lamp Holder	Max. Wattage	Barrell	Carton QTY
SURFACE17A	D/L GU10 (Max 50W) S/M Matte WH RND	GU10	50W	Ø96x125mm	1/30
SURFACE18A	D/L GU10 (Max 50W) S/M Matte BLK RND	GU10	50W	Ø96x125mm	1/30
SURFACE22	D/L GU10 (Max 50W) S/M Gimbal Matte WH RND	GU10	50W	Ø96x125mm	1/20
SURFACE23	D/L GU10 (Max 50W) S/M Gimbal Matte BLK RND	GU10	50W	Ø96x125mm	1/20
SURFACE24	D/L GU10 (Max 50W) S/M Gimbal Matte WHSQ	GU10	50W	97x97x125mm	1/20
SURFACE25	D/L GU10 (Max 50W) S/M Gimbal Matte BLK SQ	GU10	50W	97x97x125mm	1/20



GENERAL LIGHTING | **OYSTER LIGHTS**


Oys Oyster Lights

LED Tri-CCT















OYSTRI1



OYSTRI2

- Input voltage: 220-240V 50Hz
- Inbuilt LED driver
- Housing: PP
- Diffuser: frosted PS
- Heat sink: PCB + aluminium
- Tri-CCT (3000K / 4000K / 6500K) in one fitting
- CCT switch by dip switch inside the fitting
- LED chips: 2835
- CRI: 80
- Power factor: >0.9
- Ambient temperature: -20 to 45^{0}C
- Suitable for dimming, suitable for use with most dimmers
- Suitable for use with 2-way switching
- Suitable for use with sensors



Tested and recommended dimmers:

Brand	Part No.
CLA	VELA, LYNX
HPM	Cat250T, Cat400T
Clipsal	32E450UDM, 31E2PUDM, 32ELEDDM-WE, 32E450TM, PDL354PBDMUN-VW
Diginet	MEDM, MMDM/RT

Part No.	Description	Lumens			Watt	CRI	PF	Carton QTY
		3000K	4000K	6500K				
OYSTRI1	OYSTER Slim LED Dimm RND Wh 24W Tri IP54	1800lm	1900lm	1850lm	24W	80	>0.6	1/10
OYSTRI2	OYSTER Slim LED Dimm RND Wh 36W Tri IP54	2800lm	2900lm	2850lm	36W	80	>0.9	1/10

Oysdim Oyster Lights

LED Tri-CCT






OYSDIM001-002




Tri-CCT Switch on Rear

- Waterproof LED Tri-CCT dimmable oyster lights
- Input voltage range: 200-240V AC 50/60Hz
- Inbuilt driver output voltage range: 60-80V
- Material: PC
- Tri-CCT: 3000K/ 4000K/ 5000K in one fitting
- LED chips: SMD2835
- Power factor: >0.9
- CRI: 80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or microwave sensors
- Suitable for indoor & outdoor use
- Changes to appearance due to climatic conditions not covered under warranty





OYSDIM001



OYSDIM002

Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32ELEDM, 31E2PUDM, 32E450T, 31E450UDM
HPM	CAT250L

Part No.	Lumens			Watt	CRI	Diam	Depth	Back Plate	Carton QTY
	3000K	4000K	5000K						
OYSDIM001	1200LM	1300LM	1250LM	15W	80	Ø200mm	48mm	Ø175mm	1/20
OYSDIM002	2000LM	2200LM	2100LM	24W	80	Ø300mm	40mm	Ø270mm	1/12

GENERAL





OYSDIM003-005




- LED Tri-CCT dimmable oyster lights
- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver output voltage: 60-80VDC
- Base: metal
- Diffuser: PS
- LED chips: SMD2835 LED
- Power factor: >0.9
- Tri-CCT (3000K/ 4000K/5000K) in one fitting
- CRI: 80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or microwave sensors
- Changes to appearance due to climatic conditions not covered under warranty






OYSDIM003

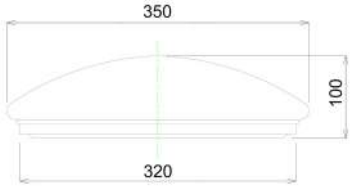

OYSDIM004

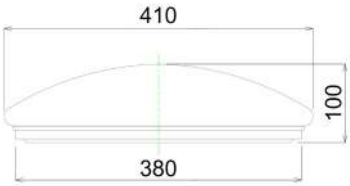

OYSDIM005

Tested & Recommended Dimmers:


Brand	Part No.
HPM	CAT250L, CAT250T & CAT400T
CLIPSAL	32E450UDM, 31E2PUDM, 32E450LM, 32ELEDM-WE & 32E450TM
DIGINET	MEDM, MMDM/RT
HPM	CAT250L

Part No.	Lumens			Watt	CRI	Power Factor	Diam	Depth	Back Plate	Carton QTY
	3000K	4000K	5000K							
OYSDIM003	960LM	1140LM	1020LM	12W	80	>0.9	Ø290mm	83mm	Ø259.3mm	1/10
OYSDIM004	1400LM	1650LM	1500LM	18W	80	>0.9	Ø350mm	100mm	Ø320mm	1/10
OYSDIM005	1700LM	2000LM	1800LM	24W	80	>0.9	Ø410mm	100mm	Ø380mm	1/8

SMTOys Oyster Lights


SMART LIGHTS | LED

- LED smart Tri-CCT dimmable oyster light
- Input voltage range: 220-240V 50Hz
- Inbuilt constant current LED driver included
- Housing: powder coated iron
- Mounting plate: iron
- Heatsink: iron & aluminium
- Diffuser: PMMA
- LED chips: SMD2835
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -20 to 40^{0}C
- App: control all functions via Tuya app on smart devices
- Manual: on/off control via normal wall switch
- Dimmable only via app or voice control through Amazon Alexa, Google Home and other compatible voice activated control devices (Not compatible with wall switch dimmer)
- Setup requires WiFi with Internet connection
- Suitable for 2-way switching
- Not suitable for use with sensor





SMTOYS1



Additional SMART Features:

- Tuneable colour temperature (3000K warm white through to 6500K daylight)
- Works with any 2.4GHz enabled WiFi network(note: will not currently pair with 5.0GHz bandwidth.) or Bluetooth LE 4.2
- Create schedules and timing to automate your home
- Control from anywhere via app or voice control using Alexa Hubs, Google Home and other compatible devices
- Compatible with all Tuya Powered apps

Google Assistant | amazon alexa

Tuya Smart
Formal version

Scan QRCode to download



Part No.	Description	Kelvin	Lumens	Watt	Dimensions	Base	Carton QTY
SMTOYS1	OYSTER LED SMART WH RND DIMM TRI CCT	3000-6500K	1350-1550LM	18W	Ø340x85mm	Ø300mm	1/8

GENERAL

Surface Oyster Lights

LED Tri-CCT






SURFACETRI1-3R
(Round)




SURFACETRI1-3S
(Square)

- Input voltage range: 220-240V
- Inbuilt constant current driver included
- Housing & faceplate: PC
- Diffuser: white PS
- Mounting bracket: aluminium
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- CCT switch on DC cable
- LED chips: SMD2835
- Power factor: 0.9
- CRI: ≥ 80
- Flex & plug not included
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with motion or Microwave sensors







SURFACETRI1R




SURFACETRI2R



SURFACETRI3R



SURFACETRI1S




SURFACETRI3S

Tested & Recommended Dimmers:

BRAND	PART NO.
CLA	VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDDM-WE, 32E450TM, PDL354PBDMUN-VW
HPM	Cat 250T, Cat 400T
Diginet	MEDM, MMDM/RT

Part No.	Description	Lumens			Watt	CRI	Carton QTY
		3000K	4000K	5000K			
SURFACETRI1R	OYSTER DIMM LED S/M WH RND TRI	420LM	480LM	450LM	6W	≥ 80	1/40
SURFACETRI2R	OYSTER DIMM LED S/M WH RND TRI	840LM	960LM	900LM	12W	≥ 80	1/40
SURFACETRI3R	OYSTER DIMM LED S/M WH RND TRI	1350LM	1550LM	1450LM	18W	≥ 80	1/20
SURFACETRI1S	OYSTER DIMM LED S/M WH SQ TRI	420LM	480LM	450LM	6W	≥ 80	1/40
SURFACETRI3S	OYSTER DIMM LED S/M WH SQ TRI	1350LM	1550LM	1450LM	18W	≥ 80	1/20

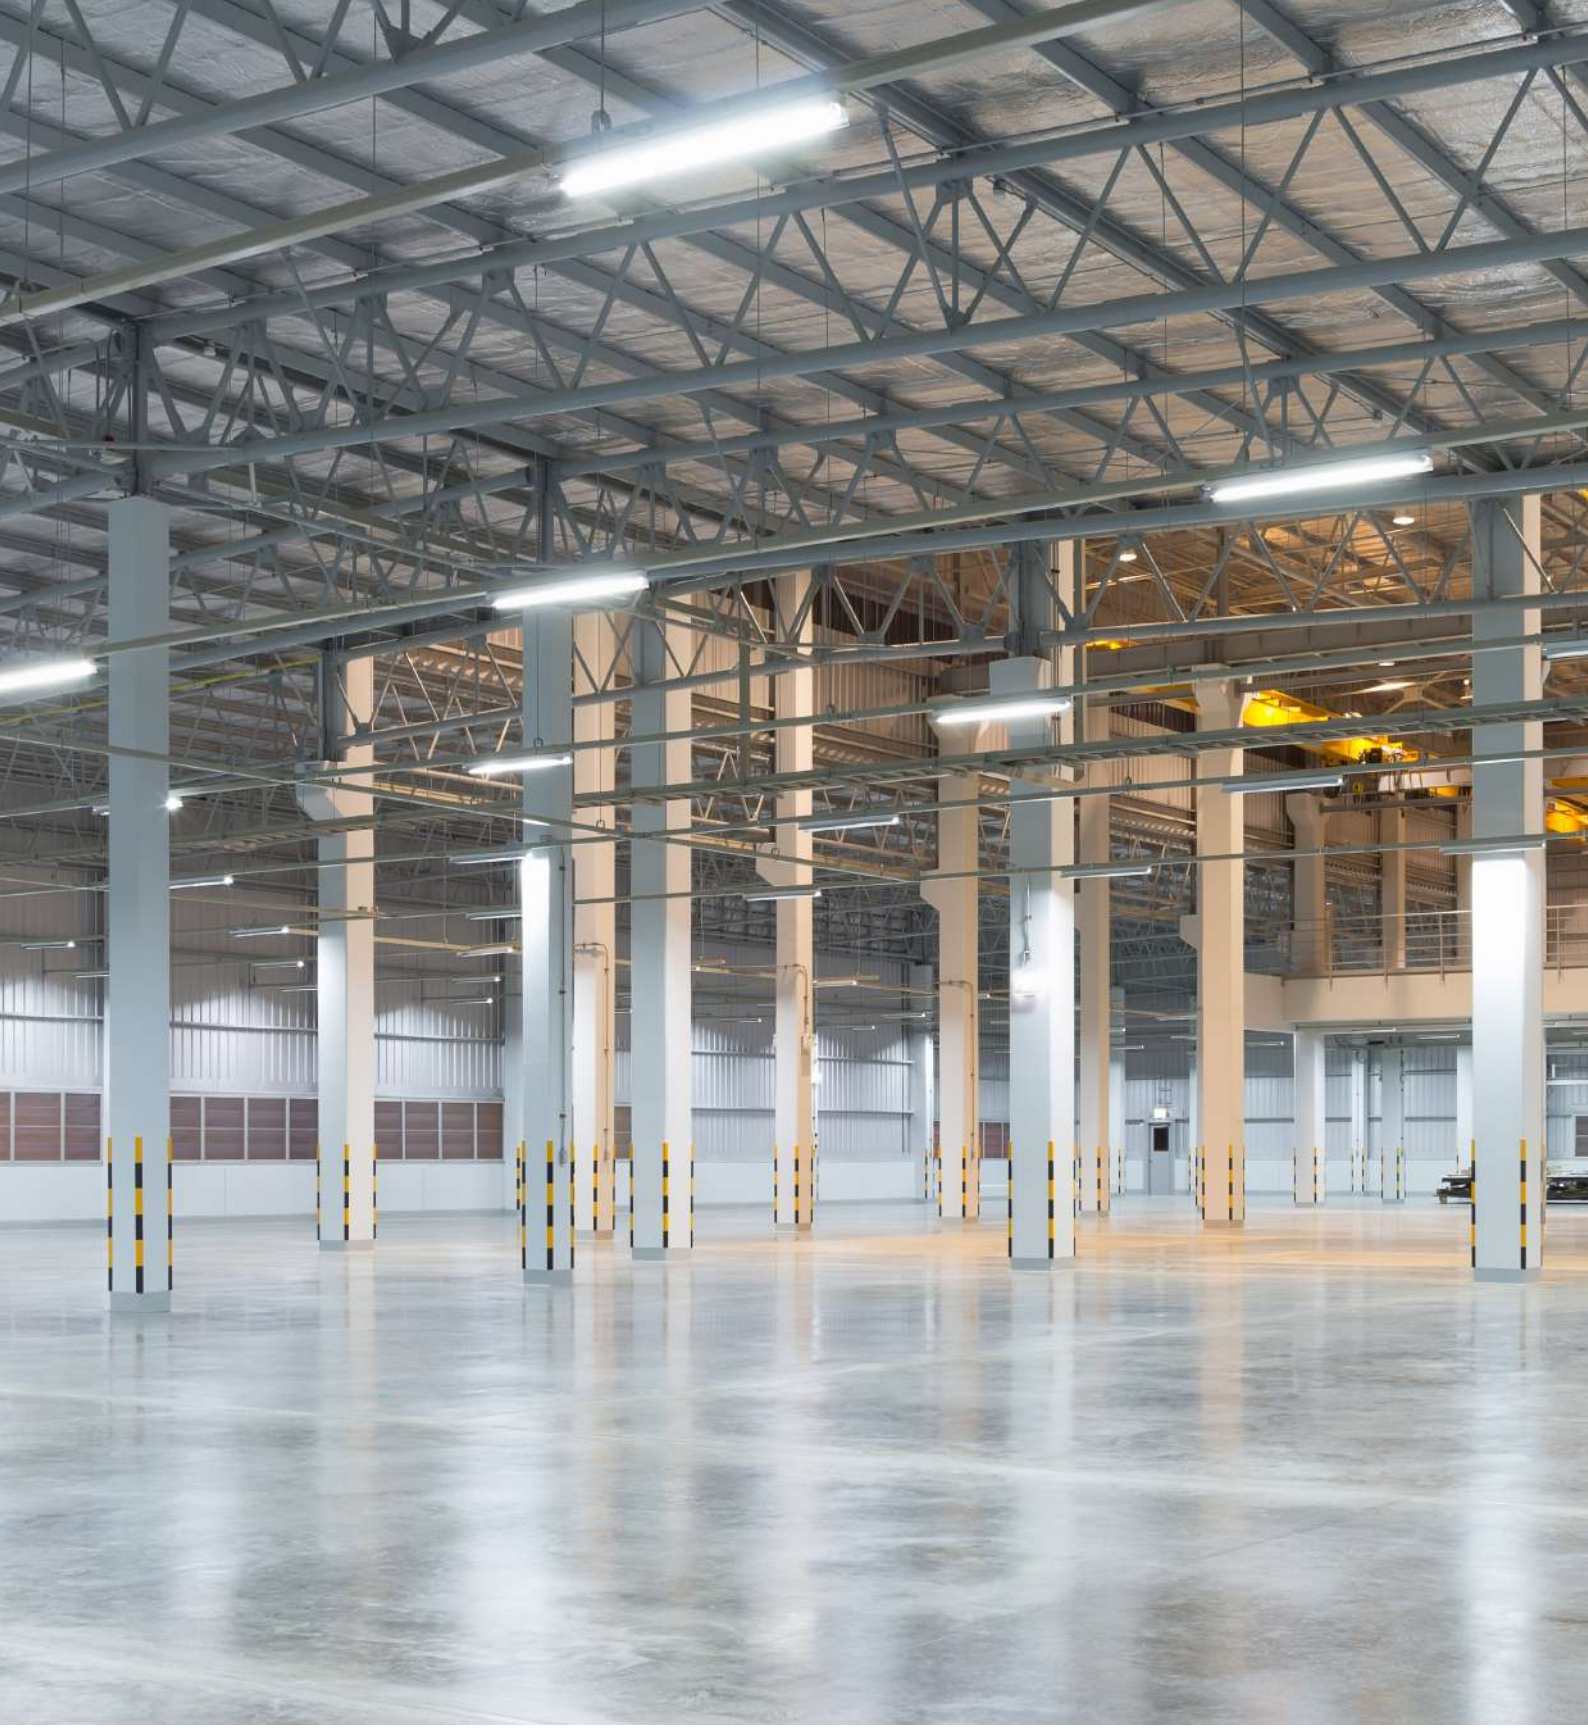

GENERAL LIGHTING | **BATTENS**

Bat Battens

LED Tri-CCT






BAT001-002



Back plate



BAT001



BAT002

- LED Tri-CCT dimmable dual power oyster lights
- Input voltage: 220-240V
- Driver inbuilt
- Material: steel & PC
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch inside the fitting
- Power factor: 0.9
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire sensor
- Large terminal block for easy installation



Part No.	Description	Lumens						Dimensions	Carton QTY
		3000K		4000K		5700K			
	BATTEN LED S/M	10W	20W	10W	20W	10W	20W	620x65x70 mm	1/9
BAT001	10W/20W Tri L620mm	900LM	1800LM	1100LM	2200LM	1000LM	2000LM		
	BATTEN LED S/M	20W	40W	20W	40W	20W	40W	1220x65x70 mm	1/9
BAT002	20W/40W Tri L1220mm	1800LM	3600LM	2200LM	4400LM	2000LM	4000LM		


GENERAL

Razordm Battens


LED Tri-CCT



RAZORDM001A-002A
(Central hole in mounting plate)



RAZORDM001A



RAZORDM002A

- Interior LED dimmable Tri-CCT surface mounted battens
- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- LED chips: SMD2835
- Power factor: ≥0.9
- CRI: >80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors



Tested & Recommended Dimmers:


Brand	Part No.
DIGINET	LEDSmart: MMDM/BP, MMDM/RT
Clipsal	Universal: 32ELEDM, 32E450UDM
HPM	CAT400L, CAT400T

Part No.	Lumens			Watt	CRI	Power Factor	Length	Width	Depth	Carton QTY
	3000K	4000K	5000K							
RAZORDM001A	1500LM	1700LM	1500LM	18W	>80	≥0.9	600mm	75mm	31mm	1/10
RAZORDM002A	3000LM	3400LM	3000LM	36W	>80	≥0.9	1200mm	75mm	31mm	1/10


Razordmw Battens LED Tri-CCT



RAZORDMW001-002
(Wide Housing: 120mm; Central hole in mounting plate)



RAZORDMW001



RAZORDMW002

- Interior LED Surface Mounted Dimmable Tri-CCT Battens (Wide)
- Input voltage: 220-240V AC 50/60Hz
- Inbuilt driver included
- Diffuser: PC (white)
- Housing: powder coated aluminium
- Heatsink: aluminium
- High power factor: ≥ 0.9
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- Internal switch (under diffuser)
- Central hole in mounting plate
- LED chips: SMD2835
- CRI: >80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming with most trailing edge dimmers
- Suitable for 2-way switching
- Suitable for use with 3 wire Microwave & Motion sensors



Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32E450TM, 32E450UDM 32ELEDM 400W 41E300PBUD2SM-VM
HPM	Cat 400L, Cat400T, MMDM/BP400W, MMDM(RT)400W

Part No.	Description	Lumens			Watt	CRI	Power Factor	Dimensions	Carton QTY
		3000K	4000K	5000K					
RAZORDMW01	BATTEN LED S/M WH DIMM Central Hole 1700Lm TRI	1500LM	1700LM	1500LM	18W	>80	≥0.9	600x120mm	1/10
RAZORDMW02	BATTEN LED S/M WH DIMM Central Hole 3400Lm TRI	3000LM	3400LM	3000LM	36W	>80	≥0.9	1200x120mm	1/10

Shield Battens LED Tri-CCT




SHIELDTRI1 & SHIELDTRI2




Back plate

- Exterior LED waterproof **DUAL POWER TRI-CCT** battens
- Input voltage range: 220-240V 50Hz
- Inbuilt Constant Current LED driver
- Housing & diffuser: PC
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- Tri-CCT switch on internal driver
- Wattage switch inside driver
- LED chips: 120pcs or 240pcs SMD2835
- CRI: >80
- Power factor: 0.9
- Ambient temperature: -20 to 40^{0}C
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors
- Includes: 2xMounting brackets(SS grade 304); 1xConnector(IP65)





SHIELDTRI1



SHIELDTRI2

Part No.	Description	Lumens						Dimensions	Carton QTY
		3000K		4000K		5000K			
		9W	18W	9W	18W	9W	18W		
SHIELDTRI1	BATTEN LED S/M TRIP-ROOF 9W/18W	800LM	1600LM	1000LM	2000LM	900LM	1800LM	600x80x75 mm	1/10
		18W	36W	18W	36W	18W	36W		
SHIELDTRI2	BATTEN LED S/M TRIP-ROOF 18W/36W	1750LM	3500LM	2000LM	4000LM	1850LM	3700LM	1200x80x75 mm	1/10

GENERAL



GENERAL LIGHTING |

CONNECTABLE TRACK SYSTEMS

Track Heads (LED 4 Wire 3 Circuit) Connectable Track System LED Tri-CCT





TRKTRI01
(Black)



TRKTRI02
(White)




Additional 60⁰ lens is included in the package



Rear Switch

- 4 wire 3 circuit LED track light heads
- Input voltage: 220-240V
- Faceplate & housing: PC
- Diffuser: PMMA
- Heatsink: aluminium
- Tri-CCT: 2700K/ 4000K/ 6000K in one fitting
- LED chip: 1pc COB LED
- Rear switch
- Power factor: 0.9
- CRI: ≥ 90
- Tilt: 90⁰ / Swivel: 355⁰
- Ambient temperature: -20 to 40⁰C
- Suitable for dimming
- Suitable for 2-way switching





Tested & Recomended Dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32ELEDM, 32E450UDM
DIGINET	MEDM
HPM LEGRAND	EM400TRWE

Part No.	Description	Lumens			Watt	CRI	Carton QTY
		2700K	4000K	6000K			
TRKTRI01	TRACK 4 WIRE 3 Circuit LED HEAD BLK	1120lm	1260lm	1220lm	15W	≥90	1/16
TRKTRI02	TRACK 4 WIRE 3 Circuit LED HEAD WH	1250lm	1420lm	1370lm	15W	≥90	1/16





TRKTRI05
(Black)



TRKTRI06
(White)




COB LED



Rear Switch

- 4 wire 3 circuit LED track light heads
- Input voltage: 220-240V
- Diffuser: clear PMMA
- Housing: aluminium
- Tri-CCT: 2700K/ 4000K/ 6000K in one fitting
- Switch on rear
- LED chip: 1pc COB LED
- Rear switch
- Power factor: 0.9
- CRI: ≥ 90
- Tilt: 90°/ Swivel: 330°
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching





Tested & Recomended Dimmers:

Brand	Part No.
CLA	VELA, LYNX
CLIPSAL	32E450TM, 32E450UDM, 42E350RUD2M-VW
DIGINET	MEDM
HPM LEGRAND	EM400TR

Part No.	Description	Lumens			Watt	CRI	Carton QTY
		2700K	4000K	6000K			
TRKTRI05	TRACK 4 WIRE 3 Circuit LED HEAD BLK	1700lm	1900lm	1800lm	25W	≥90	1/20
TRKTRI06	TRACK 4 WIRE 3 Circuit LED HEAD WH	1800lm	2000lm	1900lm	25W	≥90	1/20

Track Heads (LED 3 Wire 1 Circuit) Connectable Track System LED Tri-CCT





TRKTRI03
(Black)



TRKTRI04
(White)




Additional 60⁰ lens is included in the package



Rear Switch

- 3 wire 1 circuit LED track light heads
- Input voltage: 220-240V
- Faceplate & housing: PC
- Diffuser: PMMA
- Heatsink: aluminium
- Tri-CCT: 2700K/ 4000K/ 6000K in one fitting
- LED chip: 1pc COB LED
- Rear switch
- Power factor: 0.9
- CRI: ≥ 90
- Tilt: 90⁰ / Swivel: 355⁰
- Ambient temperature: -20 to 40⁰C
- Suitable for dimming
- Suitable for 2-way switching

30,000hr Lifetime | 36⁰ Beam Angle | IP20 Rated | 3YEAR Replacement Warranty | DIMMABLE



Tested & Recomended Dimmers:

Brand	Part No.
CLA	VELA
CLIPSAL	32ELEDM, 32E450UDM
DIGINET	MEDM
HPM LEGRAND	EM400TRWE

Part No.	Description	Lumens			Watt	CRI	Carton QTY
		2700K	4000K	6000K			
TRKTRI03	TRACK 3 WIRE 1 Circuit LED HEAD BLK	1120lm	1260lm	1220lm	15W	≥90	1/16
TRKTRI04	TRACK 3 WIRE 1 Circuit LED HEAD WH	1250lm	1420lm	1370lm	15W	≥90	1/16

GENERAL






TRKTRI07
(Black)



TRKTRI08
(White)




COB LED



Rear Switch

- 3 wire 1 circuit LED track light heads
- Input voltage: 220-240V
- Diffuser: clear PMMA
- Housing: aluminium
- Tri-CCT: 2700K/ 4000K/ 6000K in one fitting
- Switch on rear
- LED chip: 1pc COB LED
- Rear switch
- Power factor: 0.9
- CRI: ≥ 90
- Tilt: 90°/ Swivel: 330°
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching





Tested & Recomended Dimmers:

Brand	Part No.
CLA	VELA, LYNX
CLIPSAL	32E450TM, 32E450UDM, 42E350RUD2M-VW
DIGINET	MEDM
HPM LEGRAND	EM400TR

Part No.	Description	Lumens			Watt	CRI	Carton QTY
		2700K	4000K	6000K			
TRKTRI07	TRACK 3 WIRE 1 Circuit LED HEAD BLK	1700lm	1900lm	1800lm	25W	≥90	1/20
TRKTRI08	TRACK 3 WIRE 1 Circuit LED HEAD WH	1800lm	2000lm	1900lm	25W	≥90	1/20

Track Heads (GU10) Connectable Track System






TRKB3G002 & TRKB1G002




TRKW3G002 & TRKW1G002


- Interior GU10 universal track head lights
- Suitable for universal track
- Input voltage range: 100-240V
- Material: aluminium
- Colour: black and white
- Lamp holder: 1xGU10 (Max.50W)
- Globe not included
- Tilt: 90^0 / Swivel: 328^0
- Globe grabber/suction cap included

GU10 | IP20 Rated | 2YEAR Replacement Warranty









TRKB3G002 & TRKW3G002

TRKB1G002 & TRKW1G002

4 WIRE 3 CIRCUIT TRACK HEAD LIGHTS:

Part No.	Description	Carton QTY
TRKB3G002	TRACK Head 4 WIRE 3 Circuit GU10 BLK (No Globes) (Suitable for Universal Track)	1/50
TRKW3G002	TRACK Head 4 WIRE 3 Circuit GU10 WH (No Globes) (Suitable for Universal Track)	1/50

3 WIRE 1 CIRCUIT TRACK HEAD LIGHTS:

Part No.	Description	Carton QTY
TRKB1G002	TRACK Head 1 Circuit GU10 BLK (No Globes) IP20 (Suitable for Universal Track)	1/50
TRKW1G002	TRACK Head 1 Circuit GU10 WH (No Globes) IP20 (Suitable for Universal Track)	1/50

4 Wire 3 Circuits Track & Accessories Connectable Track System

4 Wire 3-Circuit Track


- Input voltage range: 220-240V/ 16A
- Material: PC and aluminium
- Colour: black and white
- Universal track



TRK3BL1M
TRK3BL2M



TRK3WH1M
TRK3WH2M





Part No.	Description	Dimensions	Carton QTY
TRK3BL1M	TRACK 3 Circuit 4 Wire 1M BLK (incl LIVE TRK3BLLIVER & END CAP TRK3BLEND)	L1000xW35.2xH35.51mm	1/12
TRK3BL2M	TRACK 3 Circuit 4 Wire 2M BLK (incl LIVE TRK3BLLIVER & END CAP TRK3BLEND)	L2000xW35.2xH35.51mm	1/12
TRK3WH1M	TRACK 3 Circuit 4 Wire 1M WH (incl LIVE TRK3WHLIVER & END CAP TRK3WHEND)	L1000xW35.2xH35.51mm	1/12
TRK3WH2M	TRACK 3 Circuit 4 Wire 2M WH (incl LIVE TRK3WHLIVER & END CAP TRK3WHEND)	L2000xW35.2xH35.51mm	1/12

4 Wire 3-Circuit Track Straight Connectors



TRK3BLCON1




TRK3WHCON1




TRK3BLCON2



TRK3WHCON2



TRK3BLCON1
TRK3WHCON1



TRK3BLCON2
TRK3WHCON2

Part No.	Description	Carton QTY
TRK3BLCON1	TRACK 3 Circuit 4 Wire Mini Straight Connector BLK	1/100
TRK3BLCON2	TRACK 3 Circuit 4 Wire Straight Connector BLK	1/100
TRK3WHCON1	TRACK 3 Circuit 4 Wire Mini Straight Connector WH	1/100
TRK3WHCON2	TRACK 3 Circuit 4 Wire Straight Connector WH	1/100


4 Wire 3-Circuit Track 'L-Piece' Connectors (Left or right)




TRK3BLCON3R
TRK3BLCON3L



TRK3WHCON3R
TRK3WHCON3L



TRK3BLCON3L
TRK3WHCON3L



TRK3BLCON3R
TRK3WHCON3R

Part No.	Description	Carton QTY
TRK3BLCON3L	TRACK 3 Circuit 4 Wire L-Piece Connector - LEFT BLK	1/30
TRK3BLCON3R	TRACK 3 Circuit 4 Wire L-Piece Connector - RIGHT BLK	1/30
TRK3WHCON3L	TRACK 3 Circuit 4 Wire L-Piece Connector - LEFT WH	1/30
TRK3WHCON3R	TRACK 3 Circuit 4 Wire L-Piece Connector - RIGHT WH	1/30


4 Wire 3-Circuit Track 'T-Piece' Connectors (Left or right)




TRK3BLCON4L1
TRK3BLCON4L2
TRK3BLCON4R1
TRK3BLCON4R2




TRK3WHCON4L1
TRK3WHCON4L2
TRK3WHCON4R1
TRK3WHCON4R2




TRK3BLCON4L1
TRK3WHCON4L1



TRK3BLCON4L2
TRK3WHCON4L2



TRK3BLCON4R1
TRK3WHCON4R1



TRK3BLCON4R2
TRK3WHCON4R2

Part No.	Description	Carton QTY
TRK3BLCON4L1	TRACK 3 Circuit 4 Wire T-Piece Connector - LEFT1 BLK	1/30
TRK3BLCON4L2	TRACK 3 Circuit 4 Wire T-Piece Connector - LEFT2 BLK	1/30
TRK3BLCON4R1	TRACK 3 Circuit 4 Wire T-Piece Connector - RIGHT1 BLK	1/30
TRK3BLCON4R2	TRACK 3 Circuit 4 Wire T-Piece Connector - RIGHT2 BLK	1/30
TRK3WHCON4L1	TRACK 3 Circuit 4 Wire T-Piece Connector - LEFT1 WH	1/30
TRK3WHCON4L2	TRACK 3 Circuit 4 Wire T-Piece Connector - LEFT2 WH	1/30
TRK3WHCON4R1	TRACK 3 Circuit 4 WireT-Piece Connector - RIGHT1 WH	1/30
TRK3WHCON4R2	TRACK 3 Circuit 4 Wire T-Piece Connector - RIGHT2 WH	1/30

4 Wire 3-Circuit Track 'Cross-Piece' & Elbow Connectors



TRK3BLCON5




TRK3WHCON5




TRK3BLCON6




TRK3WHCON6



TRK3BLCON5
TRK3WHCON5



TRK3BLCON6
TRK3WHCON6



Part No.	Description	Carton QTY
TRK3BLCON5	TRACK 3 Circuit 4 Wire Cross-Piece Connector BLK	1/30
TRK3BLCON6	TRACK 3 Circuit 4 Wire Elbow Connector BLK	1/30
TRK3WHCON5	TRACK 3 Circuit 4 Wire Cross-Piece Connector WH	1/30
TRK3WHCON6	TRACK 3 Circuit 4 Wire Elbow Connector WH	1/30


4 Wire 3-Circuit Track Flexible Connector



TRK3BLFLEXCON



TRK3WHFLEXCON



Part No.	Description	Carton QTY
TRK3BLFLEXCON	TRACK 3 Circuit 4 Wire Flexible Connector BLK	1/1
TRK3WHFLEXCON	TRACK 3 Circuit 4 Wire Flexible Connector WH	1/1

*NOTE: Except TRK3BL/WHCON1 & TRK3BL/WHCON6, all our connectors and joiners have center feed facility (ability to connect with power supply)

4 Wire 3-Circuit Track End Cap & Live End (Left or right)



TRK3BLEND




TRK3WHEND




TRK3BLLIVEL
TRK3BLLIVER




TRK3WHLIVEL
TRK3WHLIVER



TRK3BLEND
TRK3WHEND



TRK3BLLIVEL
TRK3WHLIVEL



TRK3BLLIVER
TRK3WHLIVER

Part No.	Description	Carton QTY
TRK3BLEND	TRACK 3 Circuit 4 Wire End Cap BLK	1/100
TRK3BLLIVEL	TRACK 3 Circuit 4 Wire TRACK LIVE END - LEFT BLK	1/100
TRK3BLLIVER	TRACK 3 Circuit 4 Wire TRACK LIVE END - RIGHT BLK	1/100
TRK3WHEND	TRACK 3 Circuit 4 Wire End Cap WH	1/100
TRK3WHLIVEL	TRACK 3 Circuit 4 Wire TRACK LIVE END - LEFT WH	1/100
TRK3WHLIVER	TRACK 3 Circuit 4 Wire TRACK LIVE END - RIGHT WH	1/100


4 Wire 3-Circuit Track Ceiling Kits



TRK3BLCEILKIT1



TRK3WHCEILKIT1






TRK3BLCEILKIT2




TRK3WHCEILKIT2




Part No.	Description	Carton QTY
TRK3BLCEILKIT1	TRACK 3 Circuit 4 Wire Ceiling Kit With Spring BLK	1/1
TRK3BLCEILKIT2	TRACK 3 Circuit 4 Wire Ceiling Clamp Kit For Track Connection BLK	1/1
TRK3WHCEILKIT1	TRACK 3 Circuit 4 Wire Ceiling Kit With Spring WH	1/1
TRK3WHCEILKIT2	TRACK 3 Circuit 4 Wire Ceiling Clamp Kit For Track Connection WH	1/1

4 Wire 3-Circuit Track Installation:

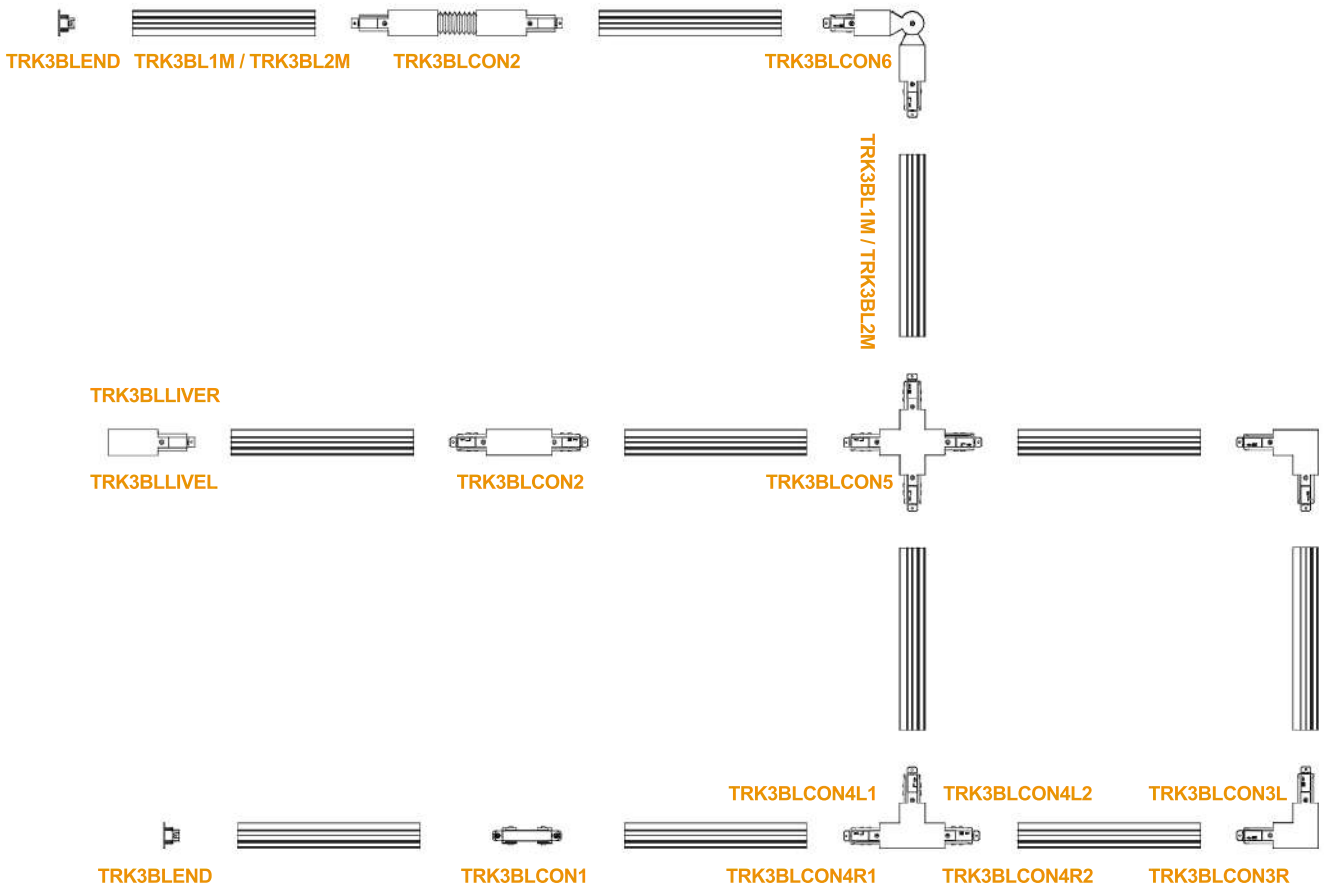

Installation :

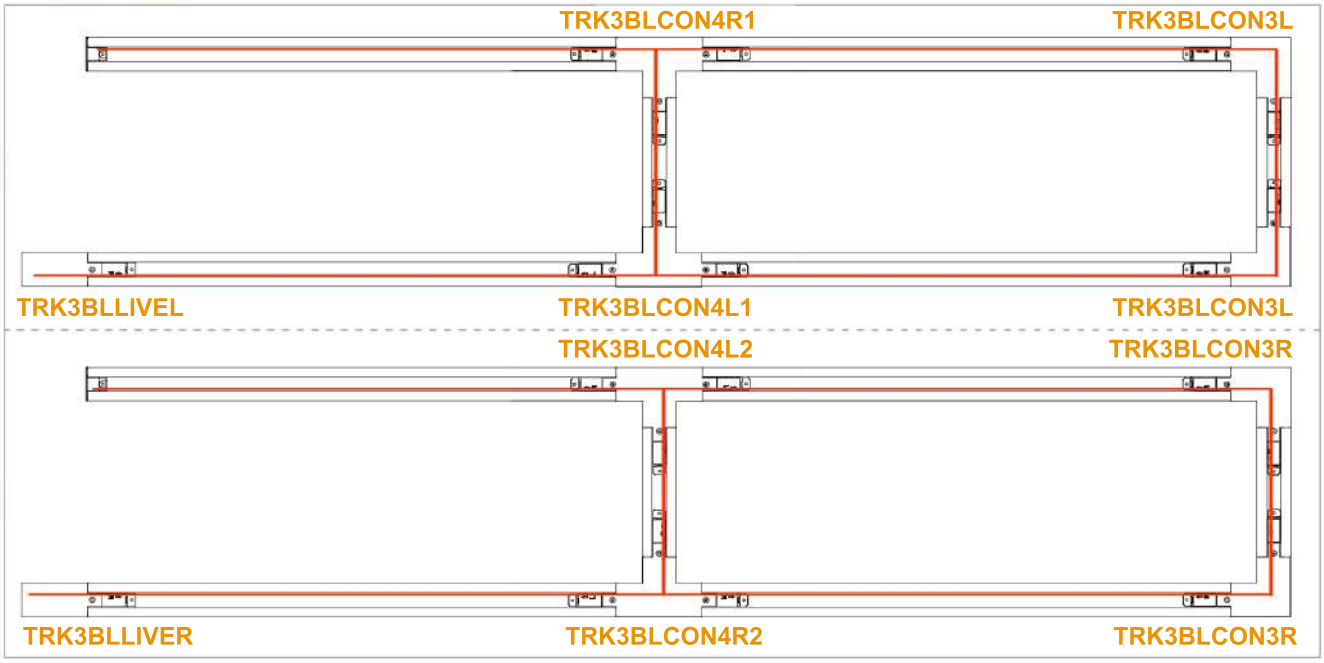

GENERAL

4 Wire 3-Circuit Track Pendant Light Adaptors




TRK3BLADAP3
TRACK 3 Circuit 4 Wire Adaptor Big Hold Weight 10Kg Max BLK



TRK3WHADAP3
TRACK 3 Circuit 4 Wire Adaptor Big Hold Weight 10Kg Max WH

- For 4 wire 3 circuit track
- Hold weight: 10kg Max
- Colour: black and white
- To be used with split nipple (Part No. TRK3BL/WHNIPCON sold separately)
- Warranty: 3 year replacement

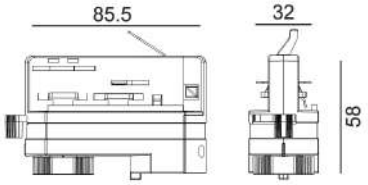




TRK3BLADAP4
TRACK 3 Circuit 4 Wire Adaptor Smal l Hold Weight 5Kg Max BLK



TRK3WHADAP4
TRACK 3 Circuit 4 Wire Adaptor Small Hold Weight 5Kg Max BLK

- For 4 wire 3 circuit track
- Hold weight: 5kg Max
- Colour: black and white
- To be used with split nipple (Part No. TRK3BL/WHNIPCON sold separately)
- Warranty: 3 year replacement

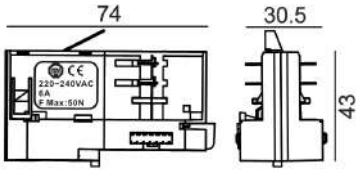


4 Wire 3-Circuit Track Split Nipple Connector



TRK3BLNIPCON
TRACK 3 Circuit 4 Wire Split Nipple Connector BLK



TRK3WHNIPCON
TRACK 3 Circuit 4 Wire Split Nipple Connector WH










4 Wire 3-Circuit Track Suspension Kits



TRK3BLSUSKIT1
TRACK 3 Circuit 4 Wire Suspension Mount Kit (With 1.5m Steel Wire) BLK



TRK3WHSUSKIT1
TRACK 3 Circuit 4 Wire Suspension Mount Kit (With 1.5m Steel Wire) WH






TRK3BLSUSKIT2
TRACK 3 Circuit 4 Wire Suspension Mount Ezclick Kit (With 1.5m Steel Wire) BLK



TRK3WHSUSKIT2
TRACK 3 Circuit 4 Wire Suspension Mount Ezclick Kit (With 1.5m Steel Wire) WH






TRK3BLSUSKIT3
TRACK 3 Circuit 4 Wire Suspension Mount Rod Kit With M6x1 Metre Threaded Rod BLK



TRK3WHSUSKIT3
TRACK 3 Circuit 4 Wire Suspension Mount Rod Kit With M6x1 Metre Threaded Rod WH

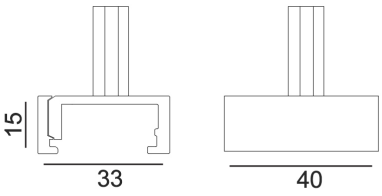




TRK3BLSUSKIT4
TRACK 3 Circuit 4 Wire Suspension Mount Ezclick Kit With M6x1 Metre Threaded Rod BLK



TRK3WHSUSKIT4
TRACK 3 Circuit 4 Wire Suspension Mount Ezclick Kit With M6x1 Metre Threaded Rod WH






TRK3BLSUSKIT5
TRACK 3 Circuit 4 Wire Suspension Kit With Spring (Added With 1.5m Steel Wire) BLK



TRK3WHSUSKIT5
TRACK 3 Circuit 4 Wire Suspension Kit With Spring (Added With 1.5m Steel Wire) WH

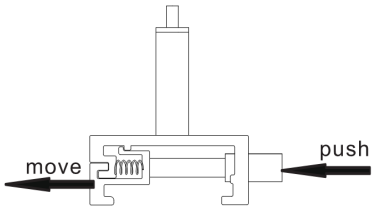


4 Wire 3-Circuit Track Suspension Clamp for Track Connection



TRK3BLSUSCLAMP
TRACK 3 Circuit 4 Wire Suspension Clamp For Track Connection BLK



TRK3WHSUSCLAMP
TRACK 3 Circuit 4 Wire Suspension Clamp For Track Connection WH



3 Wire 1 Circuits Track & Accessories Connectable Track System

3 Wire 1-Circuit Track


- Input voltage range: 220-240V/ 16A
- Material: PC and aluminium
- Colour: black and white
- Universal track




TRK1BL1M
TRK1BL2M



TRK1WH1M
TRK1WH2M



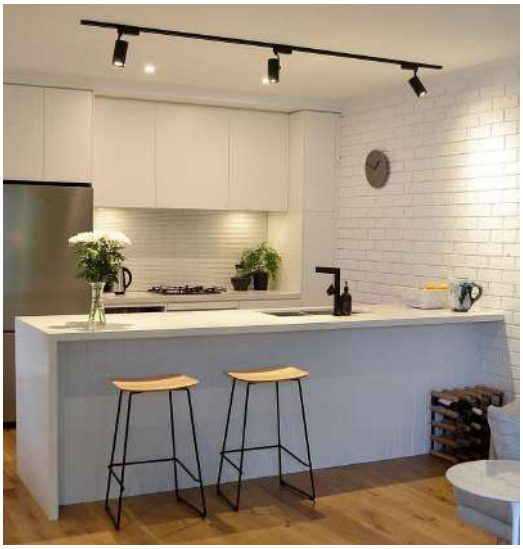

Part No.	Description	Dimensions	Carton QTY
TRK1BL1M	TRACK 1 Circuit 3 Wire 1M BLK (incl LIVE TRK1BLLIVER & END CAP TRK1BLEND)	L1000xW32.3xH20.3mm	1/20
TRK1BL2M	TRACK 1 Circuit 3 Wire 2M BLK (incl LIVE TRK1BLLIVER & END CAP TRK1BLEND)	L2000xW32.3xH20.3mm	1/20
TRK1WH1M	TRACK 1 Circuit 3 Wire 1M WH (incl LIVE TRK1WHLIVER & END CAP TRK1WHEND)	L1000xW32.3xH20.3mm	1/20
TRK1WH2M	TRACK 1 Circuit 3 Wire 2M WH (incl LIVE TRK1WHLIVER & END CAP TRK1WHEND)	L2000xW32.3xH20.3mm	1/20

3 Wire 1-Circuit Track Straight Connectors



TRK1BLCON1




TRK1WHCON1




TRK1BLCON2



TRK1WHCON2



TRK1BLCON1
TRK1WHCON1



TRK1BLCON2
TRK1WHCON2

Part No.	Description	Carton QTY
TRK1BLCON1	TRACK 1 Circuit 3 Wire Mini Straight Connector BLK	1/100
TRK1BLCON2	TRACK 1 Circuit 3 Wire Straight Connector BLK	1/100
TRK1WHCON1	TRACK 1 Circuit 3 Wire Mini Straight Connector WH	1/100
TRK1WHCON2	TRACK 1 Circuit 3 Wire Straight Connector WH	1/100


3 Wire 1-Circuit Track 'L-Piece' Connectors (Left or right)




TRK1BLCON3R
TRK1BLCON3L



TRK1WHCON3R
TRK1WHCON3L



TRK1BLCON3L
TRK1WHCON3L



TRK1BLCON3R
TRK1WHCON3R

Part No.	Description	Carton QTY
TRK1BLCON3L	TRACK 1 Circuit 3 Wire L-Piece Connector - LEFT BLK	1/100
TRK1BLCON3R	TRACK 1 Circuit 3 Wire L-Piece Connector - RIGHT BLK	1/100
TRK1WHCON3L	TRACK 1 Circuit 3 Wire L-Piece Connector - LEFT WH	1/100
TRK1WHCON3R	TRACK 1 Circuit 3 Wire L-Piece Connector - RIGHT WH	1/100


3 Wire 1-Circuit Track 'T-Piece' Connectors (Left or right)




TRK1BLCON4L1
TRK1BLCON4L2
TRK1BLCON4R1
TRK1BLCON4R2




TRK1WHCON4L1
TRK1WHCON4L2
TRK1WHCON4R1
TRK1WHCON4R2




TRK1BLCON4L1
TRK1WHCON4L1



TRK1BLCON4L2
TRK1WHCON4L2



TRK1BLCON4R1
TRK1WHCON4R1



TRK1BLCON4R2
TRK1WHCON4R2

Part No.	Description	Carton QTY
TRK1BLCON4L1	TRACK 1 Circuit 3 Wire T-Piece Connector - LEFT1 BLK	1/100
TRK1BLCON4L2	TRACK 1 Circuit 3 Wire T-Piece Connector - LEFT2 BLK	1/100
TRK1BLCON4R1	TRACK 1 Circuit 3 Wire T-Piece Connector - RIGHT1 BLK	1/100
TRK1BLCON4R2	TRACK 1 Circuit 3 Wire T-Piece Connector - RIGHT2 BLK	1/100
TRK1WHCON4L1	TRACK 1 Circuit 3 Wire T-Piece Connector - LEFT1 WH	1/100
TRK1WHCON4L2	TRACK 1 Circuit 3 Wire T-Piece Connector - LEFT2 WH	1/100
TRK1WHCON4R1	TRACK 1 Circuit 3 Wire T-Piece Connector - RIGHT1 WH	1/100
TRK1WHCON4R2	TRACK 1 Circuit 3 Wire T-Piece Connector - RIGHT2 WH	1/100

3 Wire 1-Circuit Track 'Cross-Piece' & Elbow Connectors



TRK1BLCON5




TRK1WHCON5




TRK1BLCON6L
TRK1BLCON6R




TRK1WHCON6L
TRK1WHCON6R



TRK1BLCON5
TRK1WHCON5



TRK1BLCON6L
TRK1WHCON6L



TRK1BLCON6R
TRK1WHCON6R

Part No.	Description	Carton QTY
TRK1BLCON5	TRACK 1 Circuit 3 Wire Cross-Piece Connector BLK	1/100
TRK1BLCON6L	TRACK 1 Circuit 3 Wire Elbow Connector- LEFT BLK	1/100
TRK1BLCON6R	TRACK 1 Circuit 3 Wire Elbow Connector- RIGHT BLK	1/100
TRK1WHCON5	TRACK 1 Circuit 3 Wire Cross-Piece Connector WH	1/100
TRK1WHCON6L	TRACK 1 Circuit 3 Wire Elbow Connector- LEFT WH	1/100
TRK1WHCON6R	TRACK 1 Circuit 3 Wire Elbow Connector- RIGHT WH	1/100

3 Wire 1-Circuit Track End Cap & Live End (Left or right)



TRK1BLEND




TRK1WHEND




TRK1BLLIVEL
TRK1BLLIVER




TRK1WHLIVEL
TRK1WHLIVER



TRK1BLEND
TRK1WHEND



TRK1BLLIVEL
TRK1WHLIVEL




TRK1BLLIVER
TRK1WHLIVER


Part No.	Description	Carton QTY
TRK1BLEND	TRACK 1 Circuit 3 Wire End Cap BLK	1/100
TRK1BLLIVEL	TRACK 1 Circuit 3 Wire TRACK LIVE END - LEFT BLK	1/100
TRK1BLLIVER	TRACK 1 Circuit 3 Wire TRACK LIVE END - RIGHT BLK	1/100
TRK1WHEND	TRACK 1 Circuit 3 Wire End Cap WH	1/100
TRK1WHLIVEL	TRACK 1 Circuit 3 Wire TRACK LIVE END - LEFT WH	1/100
TRK1WHLIVER	TRACK 1 Circuit 3 Wire TRACK LIVE END - RIGHT WH	1/100

***NOTE: Except TRK1BL/WHCON1 & TRK1BL/WHCON6L/R, all our connectors and joiners have center feed facility (ability to connect with power supply)**

3 Wire 1-Circuit Track Installation:

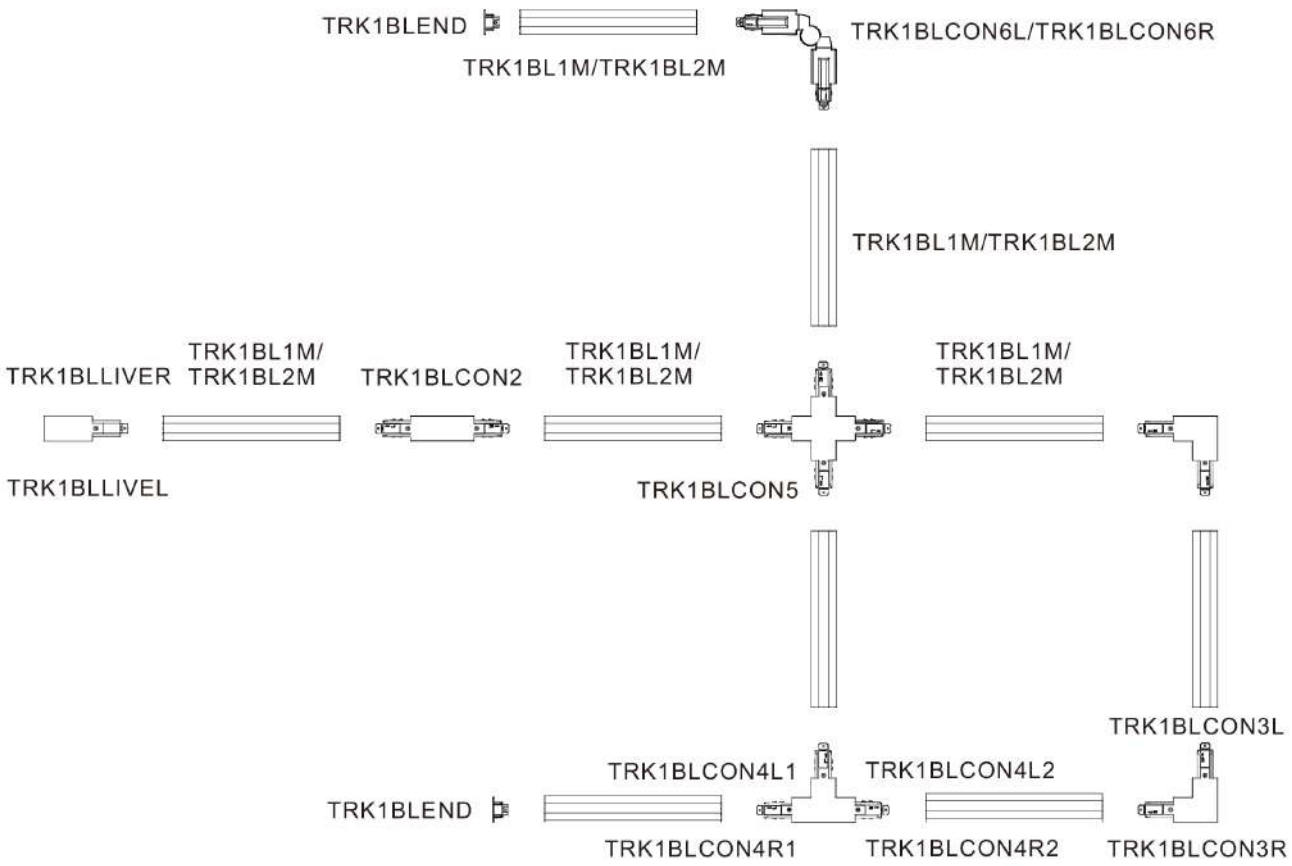

Installation :

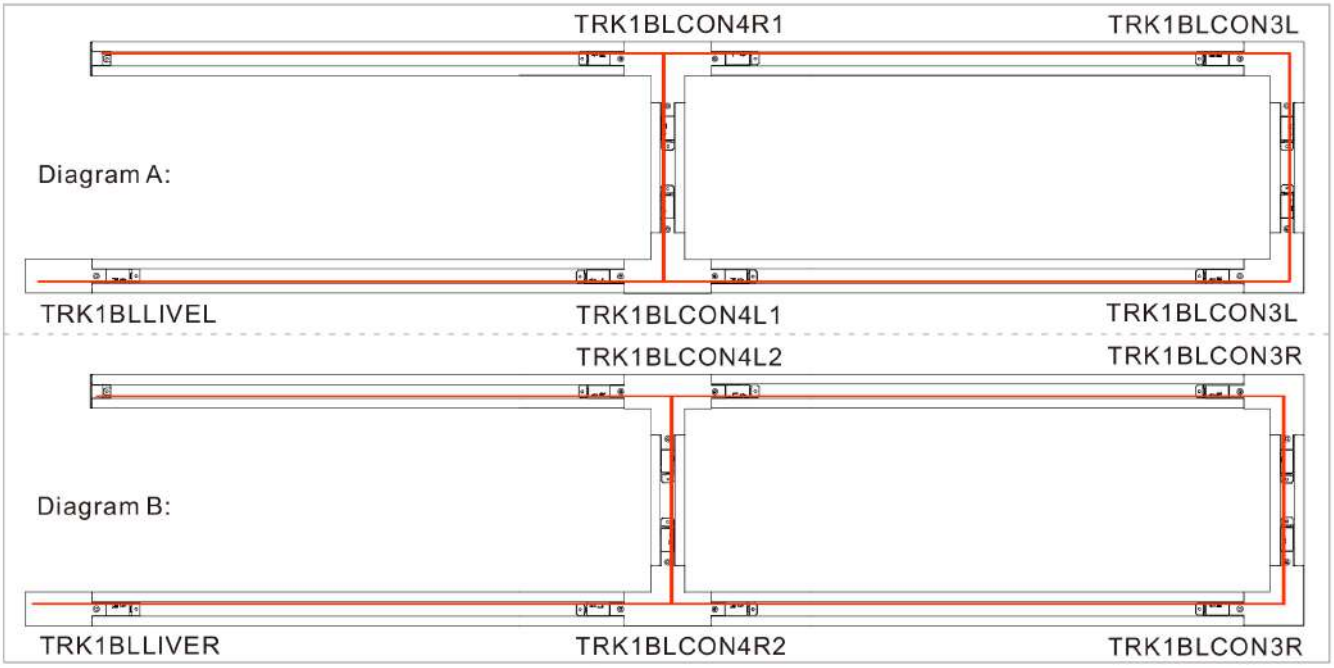

3 Wire 1 Circuit Track Pendant Light Adaptors




TRK1BLADAP1



TRK1WHADAP1

- For 3 wire 1 circuit track
- Hold weight: 5kg Max
- M10x16mm
- Colour: black and white
- Warranty: 3 year replacement



Part No.	Description
TRK1BLADAP1	TRACK 1 Circuit 3 Wire Adaptor Hold Weight 5Kg Max M10x16mm BLK
TRK1WHADAP1	TRACK 1 Circuit 3 Wire Adaptor Hold Weight 5Kg Max M10x16mm WH




TRK1BLADAP2



TRK1WHADAP2

- For 3 wire 1 circuit track
- Hold weight: 5kg Max.
- Colour: black and white
- Warranty: 3 year replacement

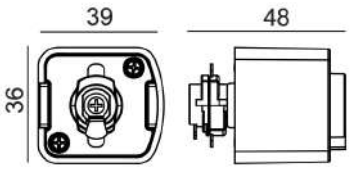

Part No.	Description
TRK1BLADAP2	TRACK 1 Circuit 3 Wire Square Adaptor Hold Weight 5Kg Max BLK
TRK1WHADAP2	TRACK 1 Circuit 3 Wire Square Adaptor Hold Weight 5Kg Max WH







GENERAL LIGHTING |

INTERIOR UTILITY LIGHTS

Bat Interior Utility Lights

LED Tri-CCT






BAT001-002



Back plate



BAT001



BAT002

- LED Tri-CCT dimmable dual power oyster lights
- Input voltage: 220-240V
- Driver inbuilt
- Material: steel & PC
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch inside the fitting
- Power factor: 0.9
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire sensor
- Large terminal block for easy installation



Part No.	Description	Lumens						Dimensions	Carton QTY
		3000K		4000K		5700K			
	BATTEN LED S/M	10W	20W	10W	20W	10W	20W	620x65x70 mm	1/9
BAT001	10W/20W Tri L620mm	900LM	1800LM	1100LM	2200LM	1000LM	2000LM		
	BATTEN LED S/M	20W	40W	20W	40W	20W	40W	1220x65x70 mm	1/9
BAT002	20W/40W Tri L1220mm	1800LM	3600LM	2200LM	4400LM	2000LM	4000LM		


GENERAL

Razordm Interior Utility Lights


LED Tri-CCT



RAZORDM001A-002A
(Central hole in mounting plate)



RAZORDM001A



RAZORDM002A

- Interior LED dimmable Tri-CCT surface mounted battens
- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- LED chips: SMD2835
- Power factor: ≥0.9
- CRI: >80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors



Tested & Recommended Dimmers:

Brand	Part No.
DIGINET	LEDSmart: MMDM/BP, MMDM/RT
Clipsal	Universal: 32ELEDM, 32E450UDM
HPM	CAT400L, CAT400T


Part No.	Lumens			Watt	CRI	Power Factor	Length	Width	Depth	Carton QTY
	3000K	4000K	5000K							
RAZORDM001A	1500LM	1700LM	1500LM	18W	>80	≥0.9	600mm	75mm	31mm	1/10
RAZORDM002A	3000LM	3400LM	3000LM	36W	>80	≥0.9	1200mm	75mm	31mm	1/10

Razordmw Interior Utility Lights


LED Tri-CCT



RAZORDMW001-002
(Wide Housing: 120mm; Central hole in mounting plate)



RAZORDMW001



RAZORDMW002

- Interior LED Surface Mounted Dimmable Tri-CCT Battens (Wide)
- Input voltage: 220-240V AC 50/60Hz
- Inbuilt driver included
- Diffuser: PC (white)
- Housing: powder coated aluminium
- Heatsink: aluminium
- High power factor: ≥ 0.9
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- Internal switch (under diffuser)
- Central hole in mounting plate
- LED chips: SMD2835
- CRI: >80
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming with most trailing edge dimmers
- Suitable for 2-way switching
- Suitable for use with 3 wire Microwave & Motion sensors



Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32E450TM, 32E450UDM 32ELEDM 400W 41E300PBUD2SM-VM
HPM	Cat 400L, Cat400T, MMDM/BP400W, MMDM(RT)400W

Part No.	Description	Lumens			Watt	CRI	Power Factor	Dimensions	Carton QTY
		3000K	4000K	5000K					
RAZORDMW01	BATTEN LED S/M WH DIMM Central Hole 1700Lm TRI	1500LM	1700LM	1500LM	18W	>80	≥0.9	600x120mm	1/10
RAZORDMW02	BATTEN LED S/M WH DIMM Central Hole 3400Lm TRI	3000LM	3400LM	3000LM	36W	>80	≥0.9	1200x120mm	1/10

Link Interior Utility Lights

LED Tri-CCT



LINKTRI01-03



LINKTRIFP




LINKTRICN




15mm hardwire connecting cable included in the box


- Interior LED Tri-CCT linkable T5 slimline lights
- Input voltage range: 220-240V AC 50/60Hz
- Inbuilt driver
- Housing: PC
- Mounting bracket: aluminium
- LED chips: SMD2835
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- Slide switch on side
- CRI: ≥80
- Power factor: >0.9
- Flex & plug and connecting cables sold separately
- Hardwire connecting cable and mounting bracket included in the box
- Not suitable for dimming
- Ambient temperature: -15 to 40°C
- Note: All LINKTRI models can be used together. Maximum connection wattage: 150W



LINKTRI01



LINKTRI02



LINKTRI03

30,000hr Lifetime | 150° Beam Angle | IP20 Rated | 3YEAR Replacement Warranty


Part No.	Description	Lumens			Watt	CRI	Width	Length	Depth	Carton QTY
		3000K	4000K	5700K						
LINKTRI01	LINKABLE LED SLIM 4W TRI	380LM	420LM	400LM	4W	80	22.6mm	322mm	37mm	1/40
LINKTRI02	LINKABLE LED SLIM 9W TRI	855LM	945LM	900LM	9W	80	22.6mm	587mm	37mm	1/40
LINKTRI03	LINKABLE LED SLIM 18W TRI	1710LM	1890LM	1800LM	18W	80	22.6mm	1187mm	37mm	1/40
LINKTRICN	LINKABLE LED SLIM CONNECTOR 220mm (22cm) FOR LINKTRI SERIES									
LINKTRIFP	LINKABLE LED SLIM F&P 2 PIN 1.2M CABLE FOR LINKTRI SERIES									

Night Interior Utility Lights *LED*





NIGHT01



- Interior LED utility wall night light
- Input voltage: 220-250V AC
- Inbuilt LED driver
- Automatically Turns on at dusk and off at dawn
- No batteries required
- Rotates through 360⁰ to light any direction
- For indoor use only



1. For best results, use in a place with ample natural light, unobstructed by window furnishings
2. To use safely, ensure the night light is fully inserted into socket
3. The photoelectric eye will sense fading light and automatically switch the night light on and off again as natural light return

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
NIGHT01	WALL INTERNAL LED PLUG IN NIGHTLIGHT	6500K	28LM	0.2W	-	72X54mm	12/96

Frango Interior Utility Lights

LED Tri-CCT






FRANGO1
(Pink)



FRANGO2
(Blue)



FRANGO3
(Yellow)




- Lithium battery 1200mA battery included
- Battery voltage: 4.2V
- Charging time: 2 hours
- Voltage input: 5V
- Voltage output: 5-12V
- 3 colour temperature modes: 3000K / 4000K / 6500K
- Full charge usage duration: 5-8 Hours
- Stepless dimming
- Touch switch

IP20 Rated | DIMMABLE | 1 YEAR Replacement Warranty




Part No.	Description	Colour	Kelvin	Lumens	Dimensions	Carton Qty
FRANGO1	LED TRI CCT Nightlight Chicken Pink Infinite Dimm USB	Pink	3000K/4000K/6500K	60-65LM	W125xH130mm	1/72
FRANGO2	LED TRI CCT Nightlight Chicken Blue Infinite Dimm USB	Blue	3000K/4000K/6500K	60-65LM	W125xH130mm	1/72
FRANGO3	LED TRI CCT Nightlight Chicken Yellow Infinite Dimm USB	Yellow	3000K/4000K/6500K	60-65LM	W125xH130mm	1/72

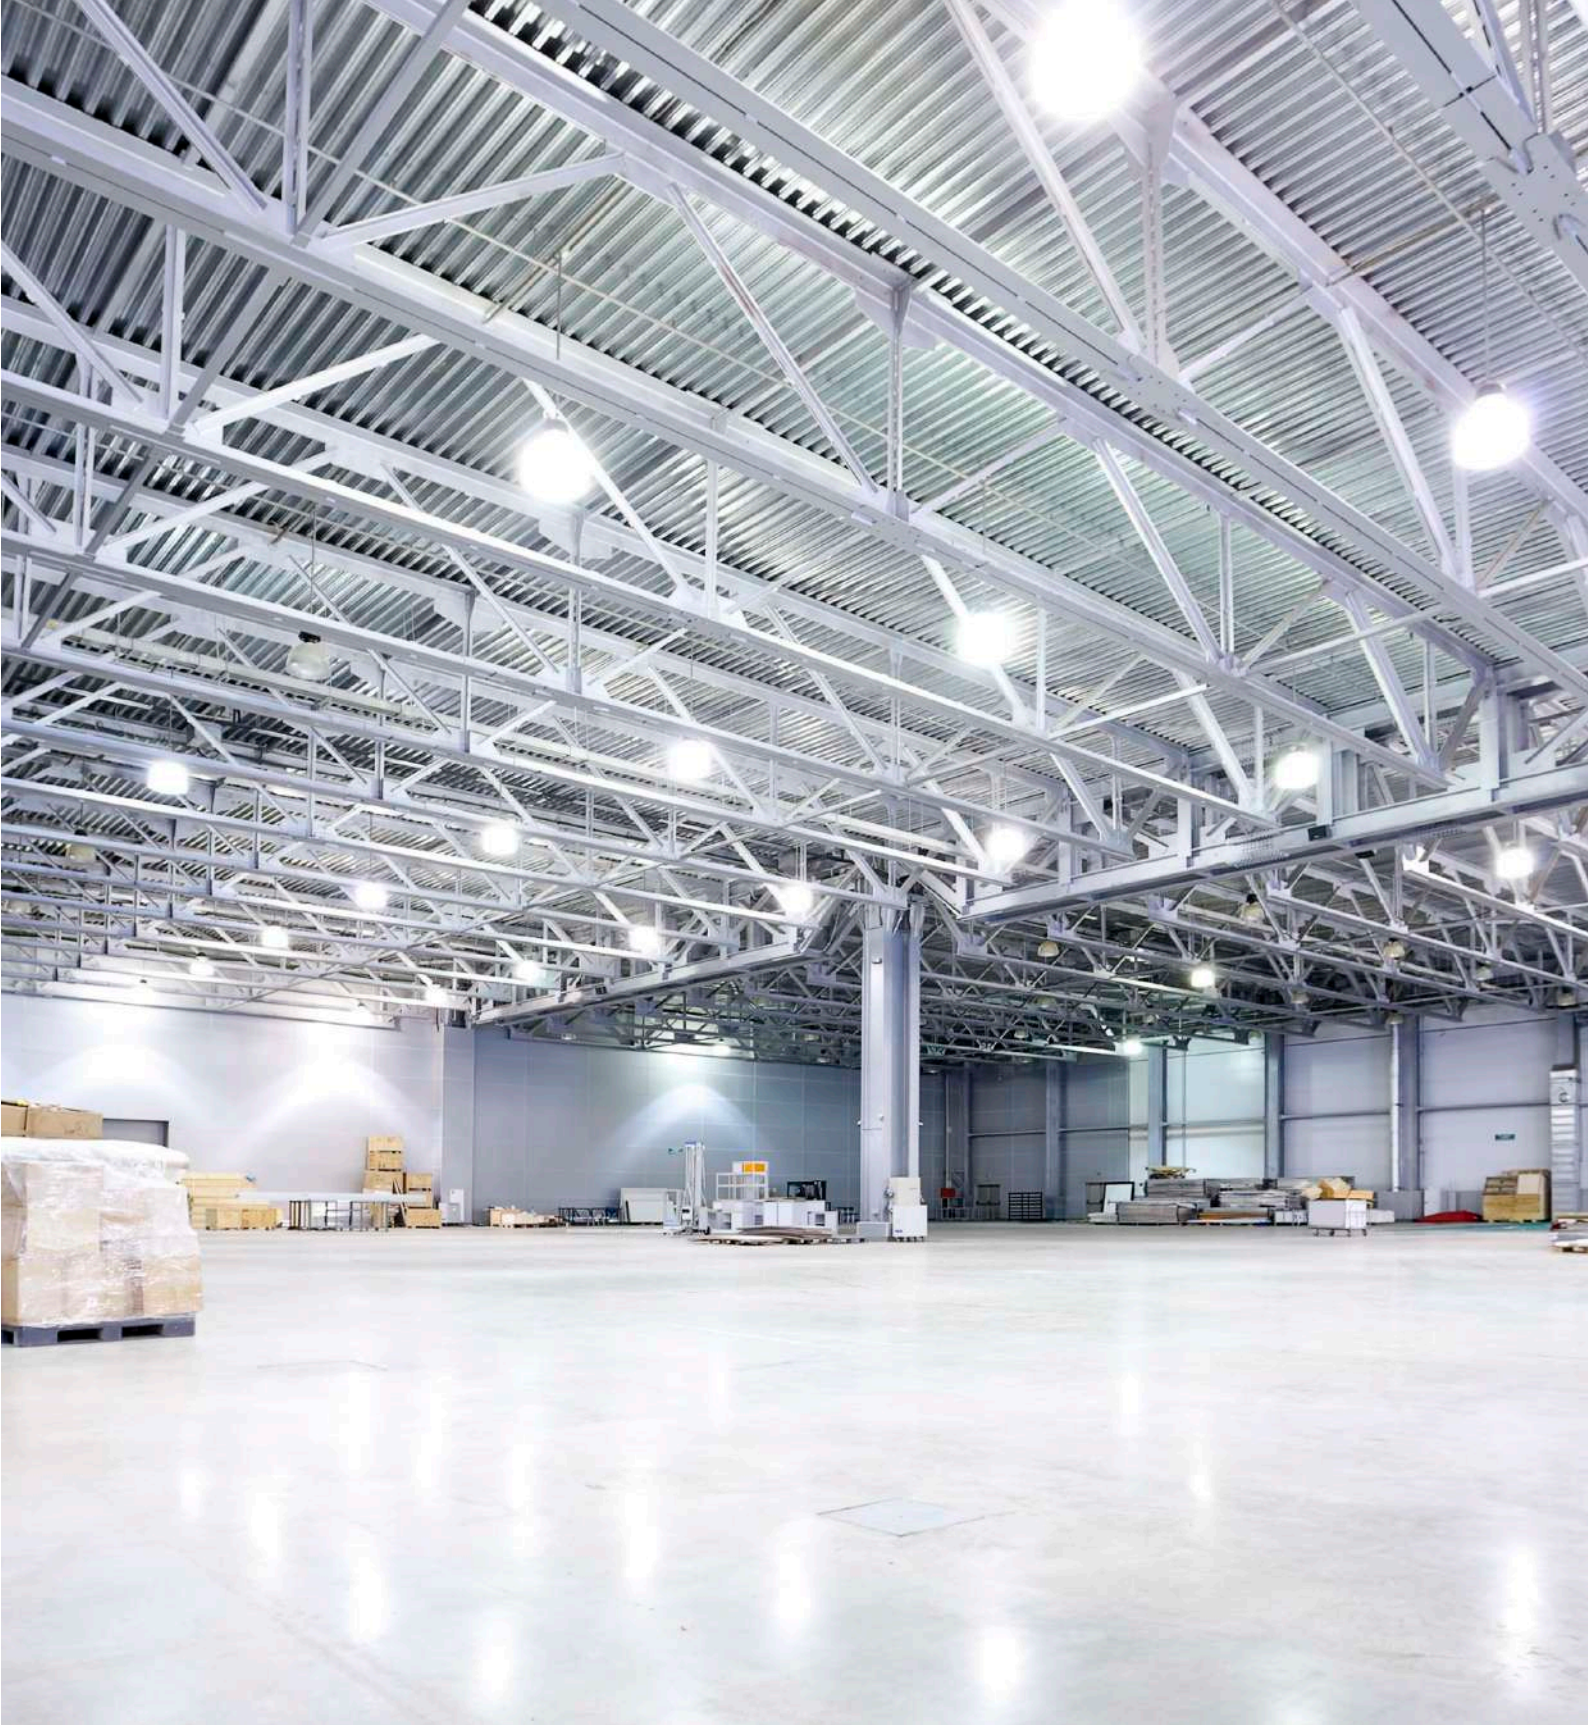

GENERAL LIGHTING | **HIGH BAY**

Hib High Bay

LED Tri-CCT

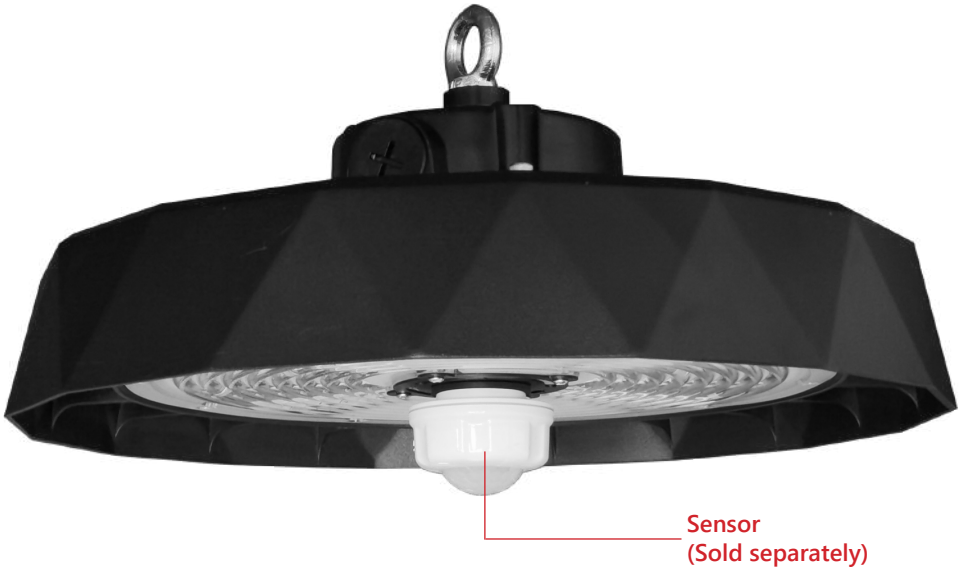






HIBTRI2

- LED power switchable Tri-CCT high bay
- Input voltage range: 120-277V AC 50Hz
- Constant current LED driver inbuilt
- Housing & Faceplate: powder coated Aluminium
- Heatsink: Aluminium
- Diffuser: Clear PC
- LED chips: 2835 LED
- CRI: >70
- Power factor: 0.95
- Flex & plug: 1.2m
- Ambient temp: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with motion & microwave sensors
- Plug in PIR sensor for HIBTRI2 available (sold separetely)





HIBSENSOR

45,000hr Lifetime | 90° Beam Angle | IP65 Rated | 5YEAR Replacement Warranty

Part No.			HIBTRI2
Lumens	100W	3000K	16500LM
		4000K	17500LM
		5700K	17000LM
	150W	3000K	23250LM
		4000K	25500LM
		5700K	24000LM
	200W	3000K	30000LM
		4000K	32000LM
		5700K	31000LM
Power Factor			0.95
Dimensions			Ø350 X H175mm
Carton QTY			1/1

	HIBSENSOR
Sensor Type	PIR
Wattage	<0.5W
Installation Height	Recommended up to 12m
Detection Angle	120°
Time Delay	5s / 1min / 5min / 10min
Ambient Temperature	-20 to 60°C
Stand by Dim Level Setup	0%, 10%, 20%, 30%
UV Resistant	Yes
Ambient Light	day and night

GENERAL



GENERAL LIGHTING | **SECURITY LIGHTS**

Sec Security Lights





SEC01




SEC01S (with Sensor)





SEC02




SEC02S (with sensor)









- Surface mounted LED PAR30 security Lights
- Adjustable: up/ down & side to side
- Input voltage: 240V AC
- Housing: PBT + PC
- Lamp holder: E27
- Max.150W PAR30 halogen globes
- 10W LED PAR30 globe (Part No. PAR3001) included

Sensor Spec:

- Detection range: 180^0
- Detection distance: 5-12m
- Detection motion speed: 0.6-1.5m/s
- Rated load: 1200W (HAL) 300W (CFL & LED)
- Time delay: Min: 10s±3s; Max: 10m±3min
- Ambient light: 3-2000 lux (adj)
- Ambient temperature: -10 to 40^{0}C
- Installation height: 1.8-2.5m
- Manual override via light switch

IP44 Rated | 3YEAR Replacement Warranty


LED Globes Other Spec (Part No. PAR3001):

- LED chips: 10pcs SMD2835
- Power factor: ≥0.5
- Ambient temperature: -10 to 40^{0}C
- Suitable for 2-way switching
- Suitable for use with PIR sensor

30,000hr Lifetime | IP44 Rated | 40^0 Beam Angle | 3YEAR Replacement Warranty



PAR001



Part No.	Description	PAR3001 INFO						Carton QTY
		Kelvin	Lumens	Watt	CRI	Beam	LEDs	
SEC01	SECURITY PAR30 ES S/ADJ BLK without sensor	5000K	800LM	10W	80	40^0	10pcs 2835	1/40
SEC01S	SECURITY PAR30 ES S/ADJ BLK with sensor	5000K	800LM	10W	80	40^0	10pcs 2835	1/32
SEC02	SECURITY PAR30 X 2 ES D/ADJ BLK without sensor	5000K	2x800LM	2x10W	80	40^0	10pcs 2835	1/24
SEC02S	SECURITY PAR30 X 2 ES D/ADJ BLK with sensor	5000K	2x800LM	2x10W	80	40^0	10pcs 2835	1/24

Sec Security Lights

LED Tri-CCT





SEC05
(Single Head)




SEC08
(Double Heads)




SEC08S
(Double Heads with Sensor)

- LED Tri-CCT security pillar lights with/without sensor
- Input voltage: 240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Adjustable: 180^0 (90^0 up/down and left/right)
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- Diffuser: clear glass with honeycomb louver
- Tri-CCT (3000K/ 4000K/ 5500K)
- CCT inbuilt switch under back plate
- LED chips: 1616 LEDs
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

IP65 Rated | 2YEAR Replacement Warranty





Sensor Technical Spec:

- Sensor type: PIR sensor
- Installation height: recommended 2-2.5m
- Detection angle: 120^0
- Detection area: max.10m
- Detection range (ØxH): max.10m when installed 2-2.5m
- Time delay: 8 ± 5 sec to 12 ± 2 min (adjustable)
- Manual override: yes

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
SEC05	Security S/ADJ LED WH No Sensor	760LM	800LM	850LM	8W	≥0.9	≥80	1/20
SEC08	D/ADJ LED Matte WH No Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10
SEC08S	D/ADJ LED Matte WH with Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10





SEC06
(Single Head)




SEC09
(Double Heads)




SEC09S
(Double Heads with Sensor)

- LED Tri-CCT security pillar lights with/without sensor
- Input voltage: 240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Adjustable: 180^0 (90^0 up/down and left/right)
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- Diffuser: clear glass with honeycomb louver
- Tri-CCT (3000K/ 4000K/ 5500K)
- CCT inbuilt switch under back plate
- LED chips: 1616 LEDs
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

IP65 Rated | 2YEAR Replacement Warranty





Sensor Technical Spec:

- Sensor type: PIR sensor
- Installation height: recommended 2-2.5m
- Detection angle: 120^0
- Detection area: max.10m
- Detection range (ØxH): max.10m when installed 2-2.5m
- Time delay: 8 ± 5 sec to 12 ± 2 min (adjustable)
- Manual override: yes

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
SEC06	Security S/ADJ LED BLK No Sensor	760LM	800LM	850LM	8W	≥0.9	≥80	1/20
SEC09	D/ADJ LED Matte BLK No Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10
SEC09S	D/ADJ LED Matte BLK with Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10





SEC07
(Single Head)




SEC10
(Double Heads)




SEC10S
(Double Heads with Sensor)

- LED Tri-CCT security pillar lights with/without sensor
- Input voltage: 240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Adjustable: 180^0 (90^0 up/down and left/right)
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- Diffuser: clear glass with honeycomb louver
- Tri-CCT (3000K/ 4000K/ 5500K)
- CCT inbuilt switch under back plate
- LED chips: 1616 LEDs
- CRI: ≥80
- Power factor: ≥0.9
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

IP65 Rated | 2YEAR Replacement Warranty





Sensor Technical Spec:

- Sensor type: PIR sensor
- Installation height: recommended 2-2.5m
- Detection angle: 120^0
- Detection area: max.10m
- Detection range (ØxH): max.10m when installed 2-2.5m
- Time delay: 8 ± 5 sec to 12 ± 2 min (adjustable)
- Manual override: yes

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
SEC07	Security S/ADJ LED Titanium No Sensor	760LM	800LM	850LM	8W	≥0.9	≥80	1/20
SEC010	D/ADJ LED Titanium No Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10
SEC10S	D/ADJ LED Titanium with Sensor	2x760LM	2x800LM	2x850LM	2x8W	≥0.9	≥80	1/10






SEC11S



- LED Tri-CCT adjustable security light with sensor
- Input voltage: 220-240V 50/60Hz
- Housing, faceplate & heatsink: plastic
- Diffuser: clear glass
- LED chips: 48pcs(3000K) + 48pcs (6500K) SMD2835
- Tri-CCT (3000K/ 4000K/ 6500K) in one fitting
- CCT switch inside the fitting
- Power Factor: >0.9
- CRI: >80
- Beam angle: 270^0 ($3x90^0$)
- Adjustable / Tilt / Swivel: 270^0
- Ambient temperature: -20 to 40^0C
- Not suitable for dimming
- Suitable for 2 way switching
- Double insulated

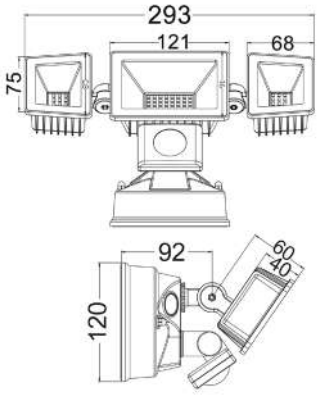

Sensor Technical Spec:

- Sensor type: PIR
- Wattage / power consumption: <0.5W
- Installation height: 1.8-3.5m
- Detection angle: 140^0 Max
- Motion detection speed: 1.5m/s
- Time delay: 8secs to 9mins
- UV resistant: yes
- Manual override: yes



Part No.	Description	Lumens			Watt	PF	CRI	Carton QTY
		3000K	4000K	6500K				
SEC11S	SECURITY S/M 30W LED TRI Blk w/sensor	2700LM	3000LM	2800LM	10W	>0.9	>80	1/12



GENERAL LIGHTING | **CEILING FAN & LIGHT**

Viftu Ceiling Fan & Light


LED Tri-CCT





VIFTU1

- Interior surface mounted ceiling fan with LED Tri-CCT light
- Input voltage: 220-240V 50/60Hz
- Output voltage: LED 210V DC and Fan 24V DC
- Housing: white injection plastic
- Diffuser: opal plastic
- Mounting plate: aluminium
- Tri-CCT (3000K / 4000K / 5500K) in one fitting
- IP remote control
- LED chips: 72pcs 2835
- Power factor: 0.9
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching

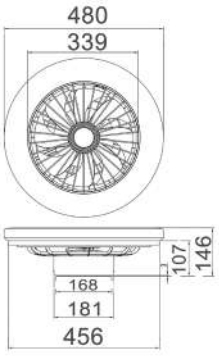

30,000hr Lifetime | 150^{0} Beam Angle | IP20 Rated | 3YEAR Replacement Warranty

Part No.	Description	Lumens			Watt	Power Factor	CRI	Carton QTY
		3000K	4000K	5500K				
VIFTU1	Ceiling Fan w/LED Light RND Wh Opal Diff 40W Tri Dimm Remote Control	2150LM	4300LM	2150LM	40W	0.9	<6	1/1



GLOBES | **LED GLOBES**

SMTGU10 LED Globes

SMART LIGHTS | LED

- GU10 LED smart Globe
- Input voltage range: 220-240V 50/60Hz
- Shade & diffuser: plastic
- LED chips: 20pcs SMD2835
- CRI: ≥80
- Power factor: 0.5
- Ambient temperature: -20 to 30^{0}C
- App: control all functions via Tuya app on smart devices
- Manual: on/off control via normal wall switch
- Dimmable only via app or voice control through Amazon Alexa, Google Home and other compatible voice activated control devices (Not compatible with wall switch dimmer)
- Setup requires WiFi with Internet connection
- Suitable for 2-way switching
- Not suitable for use with sensors

20,000hr Lifetime | GU10 | 120° Beam Angle | DIMMABLE | IP20 Rated | 2YEAR Replacement Warranty




SMTGU101

Additional SMART Features:

- Tuneable RGB colour spectrum (up to 14 million colours)
- Tuneable colour temperature (3000K warm white through to 6500K daylight)
- Works with any 2.4GHz enabled WiFi network (note: will not currently pair with 5.0GHz bandwidth.)or Bluetooth LE 4.2
- Create schedules and timing to automate your home
- Control from anywhere via app or voice control using Alexa Hubs, Google Home and other compatible devices
- Compatible with all Tuya Powered apps

Google Assistant | amazon alexa



Tuya Smart
Formal version


Scan QRCode to download

Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
SMTGU101	GLOBE LED SMART GU10 5W RGB TRI CCT	GU10	RGB+ 3000-6000K	360-450LM- 3000K 400-500LM- 4000K 400-500LM-6000K	5W	Ø50X53.8mm	1/10/100

GU10 Tri-CCT LED Globes

LED Tri-CCT

- GU10 LED Tri-CCT globe
- Input voltage: 176-264V AC
- Diffuser: plastic white
- Housing: plastic & aluminium
- Heatsink: PBT
- LED chips: 10pcs SMD2835
- Tri-CCT (3000K/ 4000K/ 5000K)
- CCT switch on housing
- CRI: ≥80
- Power factor: ≥0.5
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors





GU10TRI1


GU10 | 20,000hr Lifetime | 60° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty

Part No.	Description	Lumens			Watt	Size	Carton QTY
		3000K	4000K	5000K			
GU10TRI1	GLOBE LED GU10 6W TRI	432LM	495LM	605LM	6W	Ø50x60mm	1/10/100

GU10 LED Globes

LED

- GU10 LED globes
- Input voltage range: 240V AC 50/60Hz
- Constant current LED driver inbuilt
- Housing: Plastic
- LED chips: SMD2835
- Power factor: >0.5
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with 3 wire PIR or microwave sensors
- IP rating: IP20





GU1001A-02A

GU10 | 20,000hr Lifetime | 120° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
GU1001A	GLOBE LED GU10 6W 3000K FR 120D	GU10	3000K	470LM	6W	≥80	Ø50x54mm	1/10/100
GU1002A	GLOBE LED GU10 6W 5000K FR 120D	GU10	5000K	470LM	6W	≥80	Ø50x54mm	1/10/100

GU10 Dimmable LED Globes

LED

- GU10 dimmable LED globes
- Input voltage range: 220-240V AC
- Inbuilt constant current LED driver
- Housing & diffuser: glass
- Power factor: >0.7
- LED chips: 6pcs SMD2835
- Ambient temperature: -20 to 50°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor





GU1003D-04D

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
GU1003D	GLOBE LED GU10 DIMM 5W 3000K CLR	GU10	3000K	400LM	5W	>80	Ø50x56mm	1/10/100
GU1004D	GLOBE LED GU10 DIMM 5W 5000K CLR	GU10	5000K	400LM	5W	>80	Ø50x56mm	1/10/100

GU10 Coloured LED Globes

LED

- GU10 coloured LED globe
- Input voltage range: 220-240V AC
- Inbuilt constant current LED driver
- Housing: plastic
- Power factor: 0.5
- LED chips: 10pcs SMD2835
- Ambient temperature: -10 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor







GU10B/G/R01A

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
GU10B01A	GLOBE LED AC GU10 5W BLUE	GU10	BLUE	50LM	5=30W	N/A	Ø50x56mm	1/200
GU10G01A	GLOBE LED AC GU10 5W GREEN	GU10	GREEN	50LM	5=30W	N/A	Ø50x56mm	1/200
GU10R01A	GLOBE LED AC GU10 5W RED	GU10	RED	50LM	5=30W	N/A	Ø50x56mm	1/200

MR16 Tri-CCT LED Globes

LED Tri-CCT

- MR16 TRI-CCT LED globe
- Input voltage: 12V AC/DC
- Diffuser: plastic white
- Housing: plastic & aluminium
- Heatsink: PBT
- LED chips: 10pcs SMD2835
- Tri-CCT (3000K/ 4000K/ 5000K)
- CCT switch on housing
- CRI: ≥ 80
- Power factor: ≥ 0.5
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Not suitable for 2 way switching
- Not suitable for use with sensors





MR16TRI1

Part No.	Description	Lumens			Watt	Size	Carton QTY
		3000K	4000K	5000K			
MR16TRI1	GLOBE LED MR16 6W TRI	432LM	495LM	605LM	6W	Ø50x56mm	1/10/100

MR16 LED Globes

LED

- MR16 LED globes
- Input voltage: 12V AC/DC
- Driver input voltage: 12V 50/60Hz
- Housing & heat sink: aluminium & plastic
- LED chips: 6pcs SMD2835
- Power factor: ≥0.5
- CRI: 80
- Ambient temperature: -15 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with 3 wire PIR or Microwave sensors
- Remote constant voltage AC/DC control gear required






MR1601A-02A

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
MR1601A	GLOBE LED 12V AC/DC (Wh) MR16 3000K	MR16	3000K	480LM	6=40W	80	Ø50x47.7mm	1/10/100
MR1602A	GLOBE LED 12V AC/DC (Wh) MR16 5000K	MR16	5000K	495LM	6=40W	80	Ø50x47.7mm	1/10/100

MR16 LED Globes

LED

- MR16 coloured LED globes
- Input voltage: 12V AC/DC
- Housing: plastic & aluminium
- Wattage: 5W (=30W incandescent)
- Power factor: 0.8
- LED chips: 10pcs SMD2835 LED
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor
- Remote constant voltage AC/DC control gear required

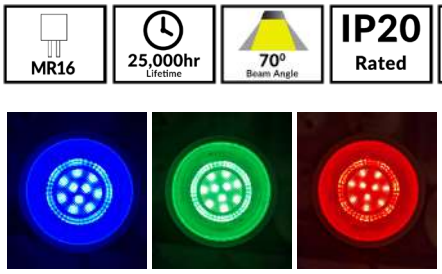



MR16B, G, R01A

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
MR16B01A	GLOBE LED 12V AC/DC MR16 BLUE	MR16	BLUE	50LM	5=30W	N/A	Ø50x46mm	1/200
MR16G01A	GLOBE LED 12V AC/DC MR16 GREEN	MR16	GREEN	50LM	5=30W	N/A	Ø50x46mm	1/200
MR16R01A	GLOBE LED 12V AC/DC MR16 RED	MR16	RED	50LM	5=30W	N/A	Ø50x46mm	1/200

MR11 LED Globes

LED

- MR11 LED globes
- Input voltage: 12V AC/DC
- Heatsink: aluminium
- Wattage: 4W=30W Incandescent globe
- LED chips: 3pcs SMD2835
- CRI: >80
- Power factor: ≥0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors
- Remote control gear required





MR1101-02


Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
MR1101	GLOBE LED 12V GU4 AC/DC MR11 4W 3000K	GU4	3000K	260LM	4W	Ø34.8X38.5mm	1/10/100
MR1102	GLOBE LED 12V GU4 AC/DC MR11 4W 5000K	GU4	5000K	260LM	4W	Ø34.8X38.5mm	1/10/100

GLS Tri-CCT Dimmable LED Globes

LED Tri-CCT

- Input voltage: 220-240V
- Diffuser: frosted plastic
- Housing: white plastic & aluminium
- Heatsink: PBT
- Tri-CCT (3000K / 4000K / 5000K) in one globe
- CCT switch on housing
- LED chips: 16pcs 2835
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors







GLSTRI1D

Tested & Recommended Dimmers:

DIGINET,CLA, CLIPSAL, LEGRAND


Part No	Description	Lumens			Watt	Dimensions	Carton Qty
		3000K	4000K	5000K			
GLSTRI1D	GLOBE LED ES GLS DIMM TRI FR Wh	891LM	930LM	891LM	10W	Ø60X111mm	1/10/50
GLSTRI2D	GLOBE LED BC GLS DIMM TRI FR Wh	891LM	930LM	891LM	10W	Ø60X111mm	1/10/50

GLS Tri-CCT LED Globes

LED Tri-CCT

- Input voltage: 176-264V AC
- Diffuser: plastic frosted
- Housing: plastic & aluminium
- Heatsink: PBT
- LED chips: 16pcs SMD2835
- Tri-CCT (3000K/ 4000K/ 5000K)
- CCT switch on housing
- CRI: ≥ 80
- Power factor: ≥ 0.5
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors







GLSTRBC1

Part No.	Description	Base	Lumens			Watt	Dimensions	Carton QTY
			3000K	4000K	5000K			
GLSTRIBC1	GLOBE LED BC GLS 10W TRI	B22	729LM	792LM	891LM	10W	Ø60x111mm	1/10/50
GLSTRIES1	GLOBE LED ES GLS 10W TRI	E27	729LM	792LM	891LM	10W	Ø60x111mm	1/10/50

GLS Filament LED Globes LED

- LED filament GLS dimmable globes
- Input Voltage range: 180-260V AC 50/60Hz
- Diffuser: clear / frosted glass
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- Ambient temperature: -20 to 50^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors





CF14-15DIM
(Clear Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF14DIM	GLOBE LED CARBON LOOK DIMM BC GLS 8W	B22	2700K	800LM	8=75W	>80	Ø60x105mm	1/25/100
CF15DIM	GLOBE LED CARBON LOOK DIMM BC GLS 8W	B22	6000K	800LM	8=75W	>80	Ø60x105mm	1/25/100
CF16DIM	GLOBE LED CARBON LOOK DIMM ES GLS 8W	E27	2700K	800LM	8=75W	>80	Ø60x105mm	1/25/100
CF17DIM	GLOBE LED CARBON LOOK DIMM ES GLS 8W	E27	6000K	800LM	8=75W	>80	Ø60x105mm	1/25/100

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
LEGRAND	Cat AR400A3PM
CLIPSAL	32ELEDM. 32E450TM, 31E2RUDM, 32E450UDM
DIGINET	MEDM




GLS36D, GLS38D
(Frosted Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
GLS36D	GLOBE LED BC GLS 8W DIMM FR	B22	2700K	800LM	8W	Ø60x105mm	1/25/100
GLS37D	GLOBE LED ES GLS 8W DIMM FR	E27	2700K	800LM	8W	Ø60x105mm	1/25/100
GLS38D	GLOBE LED BC GLS 8W DIMM FR	B22	6000K	800LM	8W	Ø60x105mm	1/25/100
GLS39D	GLOBE LED ES GLS 8W DIMM FR	E27	6000K	800LM	8W	Ø60x105mm	1/25/100

GLS LED Globes *LED*

- Input voltage range: 176-264V AC 50/60Hz
- Material: PBT, aluminium, plastic & PC
- Diffuser: frosted plastic
- LED chips: 2835 LED
- Power factor: ≥0.5
- Ambient temperature: -15 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors







BC Base
(Frosted Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
6W								
GLS13B	GLOBE LED ES GLS 6W 3000K FR 180D	E27	3000K	470LM	6W	>80	Ø60x109mm	1/10/50
GLS14B	GLOBE LED ES GLS 6W 5000K FR 180D	E27	5000K	490LM	6W	>80	Ø60x109mm	1/10/50
GLS15B	GLOBE LED BC GLS 6W 3000K FR 180D	B22	3000K	470LM	6W	>80	Ø60x108mm	1/10/50
GLS16B	GLOBE LED BC GLS 6W 5000K FR 180D	B22	5000K	490LM	6W	>80	Ø60x108mm	1/10/50
10W								
GLS31	GLOBE LED BC GLS 10W 3000K FR 180D	B22	3000K	800LM	10W	>80	Ø60x108mm	1/10/50
GLS32	GLOBE LED BC GLS 10W 5000K FR 180D	B22	5000K	825LM	10W	>80	Ø60x108mm	1/10/50
GLS33	GLOBE LED ES GLS 10W 3000K FR 180D	E27	3000K	800LM	10W	>80	Ø60x109mm	1/10/50
GLS34	GLOBE LED ES GLS 10W 5000K FR 180D	E27	5000K	825LM	10W	>80	Ø60x109mm	1/10/50
13W								
GLS21B	GLOBE LED ES GLS 13W 3000K FR 180D	E27	3000K	1055LM	13W	>80	Ø60x117mm	1/10/50
GLS22B	GLOBE LED ES GLS 13W 5000K FR 180D	E27	5000K	1107LM	13W	>80	Ø60x117mm	1/10/50
GLS23B	GLOBE LED BC GLS 13W 3000K FR 180D	B22	3000K	1055LM	13W	>80	Ø60x117mm	1/10/50
GLS24B	GLOBE LED BC GLS 13W 5000K FR 180D	B22	5000K	1107LM	13W	>80	Ø60x117mm	1/10/50
15W								
GLS25B	GLOBE LED BC GLS 15W 3000K FR 180D	B22	3000K	1348LM	15W	>80	Ø60x117mm	1/10/50
GLS26B	GLOBE LED ES GLS 15W 3000K FR 180D	E27	3000K	1348LM	15W	>80	Ø60x117mm	1/10/50
GLS27B	GLOBE LED BC GLS 15W 5000K FR 180D	B22	5000K	1470LM	15W	>80	Ø60x117mm	1/10/50
GLS28B	GLOBE LED ES GLS 15W 5000K FR 180D	E27	5000K	1470LM	15W	>80	Ø60x117mm	1/10/50

GLS Dimmable LED Globes

LED

- Input voltage range: 176-264V AC 50/60Hz
- Constant current LED driver inbuilt
- Heat sink: aluminium-plastic
- Diffuser: frosted plastic
- LED chips: SMD2835 LED
- Power factor: ≥0.7
- Ambient temperature: -15 to 40^{0}C
- Dimmable with most trailing edge or leading edge dimmers
- Suitable for 2-way switching
- Suitable for use with sensors





BC Base
(Frosted Diffuser)

Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32E450UDM
CLIPSAL	32E350UDM
HPM Legrand	CAT400T

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
GLS9DB	GLOBE LED BC GLS DIMM 10W 3000K FR	B22	3000K	810LM	10W	>80	Ø60x108mm	1/10/50
GLS10DB	GLOBE LED ES GLS DIMM 10W 3000K FR	E27	3000K	810LM	10W	>80	Ø60x109mm	1/10/50
GLS11DB	GLOBE LED BC GLS DIMM 10W 5000K FR	B22	5000K	850LM	10W	>80	Ø60x108mm	1/10/50
GLS12DB	GLOBE LED ES GLS DIMM 10W 5000K FR	E27	5000K	850LM	10W	>80	Ø60x109mm	1/10/50
GLS29D	GLOBE LED BC GLS DIMM 10W 4000K FR	B22	4000K	810LM	10W	>80	Ø60x108mm	1/10/50
GLS30D	GLOBE LED ES GLS DIMM 10W 4000K FR	E27	4000K	810LM	10W	>80	Ø60x109mm	1/10/50






Fancy Round Filament LED Globes LED

- LED filament G45 dimmable globes
- Input Voltage range: 180-260V AC 50/60Hz
- Diffuser: clear / frosted glass
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- Ambient temperature: -20 to 50°C
- Suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors








CF30DIM, CF31DIM
(Clear Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF30DIM	GLOBE LED CARBON LOOK BC G45 4W	B22	2700K	400LM	4=40W	>80	Ø45x73mm	1/25/100
CF31DIM	GLOBE LED CARBON LOOK BC G45 4W	B22	6000K	400LM	4=40W	>80	Ø45x73mm	1/25/100
CF32DIM	GLOBE LED CARBON LOOK E27 G45 4W	E27	2700K	400LM	4=40W	>80	Ø45x73mm	1/25/100
CF33DIM	GLOBE LED CARBON LOOK E27 G45 4W	E27	6000K	400LM	4=40W	>80	Ø45x73mm	1/25/100
CF34DIM	GLOBE LED CARBON LOOK SBC G45 4W	B15	2700K	400LM	4=40W	>80	Ø45x78mm	1/25/100
CF35DIM	GLOBE LED CARBON LOOK SBC G45 4W	B15	6000K	400LM	4=40W	>80	Ø45x78mm	1/25/100
CF36DIM	GLOBE LED CARBON LOOK SES G45 4W	E14	2700K	400LM	4=40W	>80	Ø45x78mm	1/25/100
CF37DIM	GLOBE LED CARBON LOOK SES G45 4W	E14	6000K	400LM	4=40W	>80	Ø45x78mm	1/25/100

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
LEGRAND	Cat AR400A3PM
CLIPSAL	32ELEDM, 32E450TM, 31E2RUDM, 32E450UDM
DIGINET	MEDM





FR43D, FR44D
(Frosted Diffuser)


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
FR41D	GLOBE LED DIMM filament 4W F/RND	B22	2700K	400LM	4W	>80	Ø45x73mm	1/25/100
FR42D	GLOBE LED DIMM filament 4W F/RND	B22	6000K	400LM	4W	>80	Ø45x73mm	1/25/100
FR43D	GLOBE LED DIMM filament 4W F/RND	E27	2700K	400LM	4W	>80	Ø45x73mm	1/25/100
FR44D	GLOBE LED DIMM filament 4W F/RND	E27	6000K	400LM	4W	>80	Ø45x73mm	1/25/100
FR45D	GLOBE LED DIMM filament 4W F/RND	B15	2700K	400LM	4W	>80	Ø45x78mm	1/25/100
FR46D	GLOBE LED DIMM filament 4W F/RND	B15	6000K	400LM	4W	>80	Ø45x78mm	1/25/100
FR47D	GLOBE LED DIMM filament 4W F/RND	E14	2700K	400LM	4W	>80	Ø45x78mm	1/25/100
FR48D	GLOBE LED DIMM filament 4W F/RND	E14	6000K	400LM	4W	>80	Ø45x78mm	1/25/100

Fancy Round LED Globes

LED

- Input voltage: 240V AC 50/60Hz
- Heatsink: aluminium
- Housing: aluminium-plastic & PC
- Diffuser: frosted
- LED chips: 6pcs SMD2835 LED
- Power factor: ≥0.4
- Ambient temperature: -15 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

20,000hr Lifetime | 180^0 Beam Angle | IP20 Rated | 2YEAR Replacement Warranty

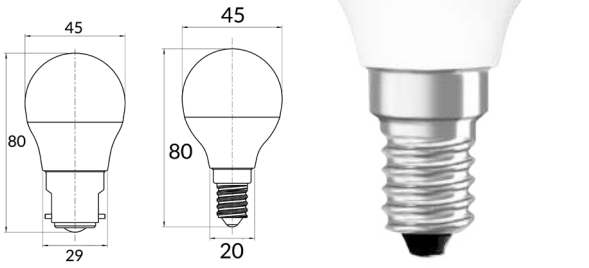



FR36, FR40
(Frosted Diffuser)


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
FR36	GLOBE LED SES F/RND 3W 3000K FR 180D	E14	3000K	235LM	3=25W	80	Ø45x80mm	1/10/100
FR37	GLOBE LED BC F/RND 3W 5000K FR 180D	B22	5000K	260LM	3=25W	80	Ø45x80mm	1/10/100
FR40	GLOBE LED SES 3W F/RND 5000K FR 180D	E14	5000K	260LM	3=25W	80	Ø45x80mm	1/10/100

Candle Filament LED Globes

LED

- Input Voltage range: 180-260V AC 50/60Hz
- Diffuser: clear / frosted glass
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- Ambient temperature: -20 to 50°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors








CF38-39DIM

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF38DIM	GLOBE LED CARBON LOOK BC C37 4W	B22	2700K	400LM	4=40W	>80	Ø35x93mm	1/25/100
CF39DIM	GLOBE LED CARBON LOOK BC C37 4W	B22	6000K	400LM	4=40W	>80	Ø35x93mm	1/25/100
CF40DIM	GLOBE LED CARBON LOOK ES C37 4W	E27	2700K	400LM	4=40W	>80	Ø35x93mm	1/25/100
CF41DIM	GLOBE LED CARBON LOOK ES C37 4W	E27	6000K	400LM	4=40W	>80	Ø35x93mm	1/25/100
CF42DIM	GLOBE LED CARBON LOOK SBC C37 4W	B15	2700K	400LM	4=40W	>80	Ø35x98mm	1/25/100
CF43DIM	GLOBE LED CARBON LOOK SBC C37 4W	B15	6000K	400LM	4=40W	>80	Ø35x98mm	1/25/100
CF44DIM	GLOBE LED CARBON LOOK SES C37 4W	E14	2700K	400LM	4=40W	>80	Ø35x98mm	1/25/100
CF45DIM	GLOBE LED CARBON LOOK SES C37 4W	E14	6000K	400LM	4=40W	>80	Ø35x98mm	1/25/100

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
LEGRAND	Cat AR400A3PM
CLIPSAL	32ELEDM, 32E450TM, 31E2RUDM, 32E450UDM
DIGINET	MEDM





CAN39-40D

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CAN33D	GLOBE LED DIMM filament 4W candle	B22	2700K	400LM	4W	>80	Ø35x93mm	1/25/100
CAN34D	GLOBE LED DIMM filament 4W candle	B22	6000K	400LM	4W	>80	Ø35x93mm	1/25/100
CAN35D	GLOBE LED DIMM filament 4W candle	E27	2700K	400LM	4W	>80	Ø35x93mm	1/25/100
CAN36D	GLOBE LED DIMM filament 4W candle	E27	6000K	400LM	4W	>80	Ø35x93mm	1/25/100
CAN37D	GLOBE LED DIMM filament 4W candle	B15	2700K	400LM	4W	>80	Ø35x98mm	1/25/100
CAN38D	GLOBE LED DIMM filament 4W candle	B15	6000K	400LM	4W	>80	Ø35x98mm	1/25/100
CAN39D	GLOBE LED DIMM filament 4W candle	E14	2700K	400LM	4W	>80	Ø35x98mm	1/25/100
CAN40D	GLOBE LED DIMM filament 4W candle	E14	6000K	400LM	4W	>80	Ø35x98mm	1/25/100


T40 Dimmable LED Globes LED

- Input voltage range: 220-240V AC 50/60Hz
- Constant current LED driver inbuilt
- Housing: aluminium-plastic
- Heat sink: aluminium
- LED chips: 10pcs SMD2835 LED
- Power factor: >0.7
- Ambient temperature: -25 to 40^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with Microwave and PIR sensors



Tested & Recommended Dimmers:

Brand	Part No.
PDL	654M, 654TM
Legrand	CAT 400T
Diginet - LED smart	MEDM
Clipsal	32E450UDM, 32E450LM, 32ELEDM

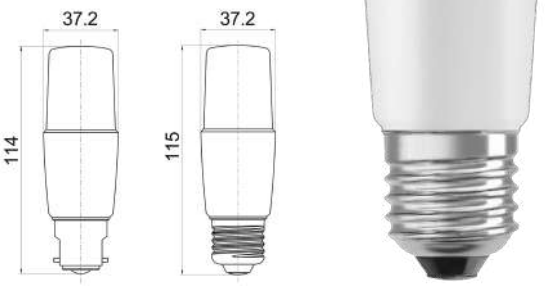

LT40D07-08

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
LT40D01	GLOBE LED BC T40 9W 3000K FR DIMM	B22	3000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT40D02	GLOBE LED BC T40 9W 4000K FR DIMM	B22	4000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT40D03	GLOBE LED BC T40 9W 5000K FR DIMM	B22	5000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT40D04	GLOBE LED BC T40 9W 6000K FR DIMM	B22	6000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT40D07	GLOBE LED ES T40 9W 5000K FR DIMM	E27	5000K	800LM	9W	≥80	Ø37.2x115mm	1/10/100
LT40D08	GLOBE LED ES T40 9W 6000K FR DIMM	E27	6000K	800LM	9W	≥80	Ø37.2x115mm	1/10/100

T40 LED Globes LED

- Input voltage range: 220-240V AC 50/60Hz
- Constant current LED driver inbuilt
- Housing: aluminium-plastic
- Heat sink: aluminium
- LED chips: 10pcs SMD2835 LED
- Power factor: >0.5
- Ambient temperature: -25 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with Microwave and PIR sensors





LT4014-17

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
LT4010	GLOBE LED BC T40 9W 3000K FR	B22	3000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT4011	GLOBE LED BC T40 9W 4000K FR	B22	4000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT4012	GLOBE LED BC T40 9W 5000K FR	B22	5000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT4013	GLOBE LED BC T40 9W 6000K FR	B22	6000K	800LM	9W	≥80	Ø37.2x114mm	1/10/100
LT4014	GLOBE LED ES T40 9W 3000K FR	E27	3000K	800LM	9W	≥80	Ø37.2x115mm	1/10/100
LT4015	GLOBE LED ES T40 9W 4000K FR	E27	4000K	800LM	9W	≥80	Ø37.2x115mm	1/10/100
LT4016	GLOBE LED ES T40 9W 5000K FR	E27	5000K	800LM	9W	≥80	Ø37.2x115mm	1/10/100
LT4017	GLOBE LED ES T40 9W 6000K FR	E27	6000K	800LM	9W	≥80	Ø37.2x115mm	1/10/100

12V T40 LED Globes

LED

- Input voltage: 12V AC/DC
- Diffuser & housing: plastic
- Heatsink: PBT
- 10pcs LED chips: SMD2835
- CRI: >80
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor





LT4012V1-2

Tested and Recommended Driver (May work with Iron Core Transformer):

CLA111011, , CLA1120011,
OTTER1, OTTER2, OTTER3, OTTER4, OTTER5, OTTER7, OTTER8,
CLADR12WFP, DRIV1


Part No.	Description	Base	Kelvin (K)	Lumens (LM)	Watt (W)	Length (mm)	Diam (mm)	Carton QTY
LT4012V1	GLOBE LED 12V ES T40 9W 3000K FR	E27	3000	800	9	116	37	1/10/100
LT4012V2	GLOBE LED 12V ES T40 9W 5000K FR	E27	5000	800	9	116	37	1/10/100

G95 Filament LED Globes

LED

- LED filament G95 dimmable globes
- Input Voltage range: 180-260V AC 50/60Hz
- Diffuser: clear / frosted glass
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- Ambient temperature: -20 to 50^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors








CF20-21DIM
(Clear Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF18DIM	GLOBE LED CARBON LOOK BC G95 6W	B22	2700K	600LM	6=60W	>80	Ø95x140mm	1/50
CF19DIM	GLOBE LED CARBON LOOK BC G95 6W	B22	6000K	600LM	6=60W	>80	Ø95x140mm	1/50
CF20DIM	GLOBE LED CARBON LOOK E27 G95 6W	E27	2700K	600LM	6=60W	>80	Ø95x140mm	1/50
CF21DIM	GLOBE LED CARBON LOOK E27 G95 6W	E27	6000K	600LM	6=60W	>80	Ø95x140mm	1/50

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
LEGRAND	Cat AR400A3PM
CLIPSAL	32ELEDM, 32E450TM, 31E2RUDM, 32E450UDM
DIGINET	MEDM





G959, G9511
(Frosted Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
G959	GLOBE LED BC G95 6W FR DIMM	B22	2700K	600LM	6W	>80	Ø95x140mm	1/25/50
G9510	GLOBE LED ES G95 6W FR DIMM	E27	2700K	600LM	6W	>80	Ø95x140mm	1/25/50
G9511	GLOBE LED BC G95 6W FR DIMM	B22	6000K	600LM	6W	>80	Ø95x140mm	1/25/50
G9512	GLOBE LED ES G95 6W FR DIMM	E27	6000K	600LM	6W	>80	Ø95x140mm	1/25/50

G125 Filament LED Globes

LED

- LED filament G125 dimmable globes
- Input Voltage range: 180-260V AC 50/60Hz
- Diffuser: clear / frosted glass
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- Ambient temperature: -20 to 50^{0}C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors





CF24-25DIM
(Clear Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF22DIM	GLOBE LED CARBON LOOK BC G125 8W	B22	2700K	800LM	8=75W	>80	Ø125x170mm	1/50
CF23DIM	GLOBE LED CARBON LOOK BC G125 8W	B22	6000K	800LM	8=75W	>80	Ø125x170mm	1/50
CF24DIM	GLOBE LED CARBON LOOK ES G125 8W	E27	2700K	800LM	8=75W	>80	Ø125x170mm	1/50
CF25DIM	GLOBE LED CARBON LOOK ES G125 8W	E27	6000K	800LM	8=75W	>80	Ø125x170mm	1/50

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
LEGRAND	Cat AR400A3PM
CLIPSAL	32ELEDM, 32E450TM, 31E2RUDM, 32E450UDM
DIGINET	MEDM




G1259, G12511
(Frosted Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
G1259	GLOBE LED BC G125 8W FR DIMM	B22	2700K	800LM	8W	>80	Ø125x175mm	1/25/50
G12510	GLOBE LED ES G125 8W FR DIMM	E27	2700K	800LM	8W	>80	Ø125x175mm	1/25/50
G12511	GLOBE LED BC G125 8W FR DIMM	B22	6000K	800LM	8W	>80	Ø125x175mm	1/25/50
G12512	GLOBE LED ES G125 8W FR DIMM	E27	6000K	800LM	8W	>80	Ø125x175mm	1/25/50

- Input voltage range: 220-250V AC 50/60Hz
- Cap base: aluminium
- Diffuser: amber tinge/ vintage colour glass
- Power factor: ≥0.4
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming



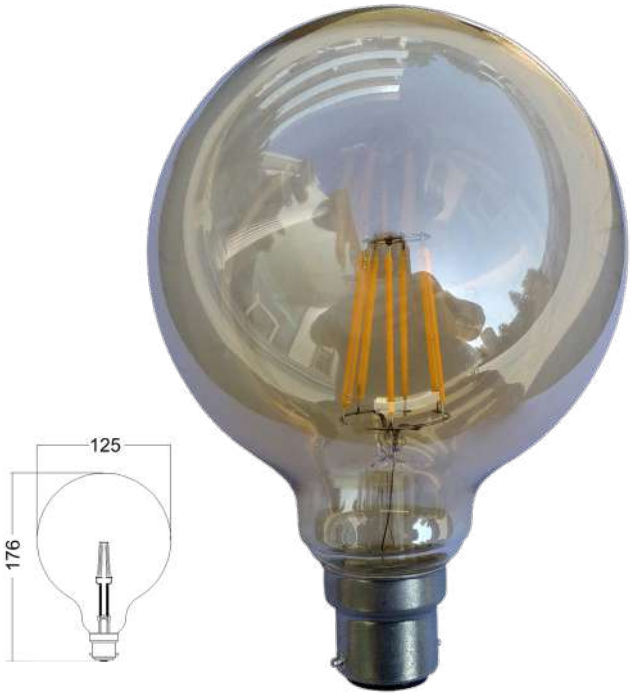

CF4A
(Amber Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF3A	GLOBE LED CARBON LOOK ES G125 (Amber)	E27	2200K	425lm	6=60W	80	Ø125x176mm	1/20
CF4A	GLOBE LED CARBON LOOK BC G125 (Amber)	B22	2200K	425lm	6=60W	80	Ø125x176mm	1/20

ST64 Pear Filament LED Globes


LED

- LED filament ST64 dimmable globes
- Input Voltage range: 180-260V AC 50/60Hz
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- Ambient temperautre: -20 to 50°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

25,000hr Lifetime | 360° Beam Angle | IP20 Rated | DIMMABLE | 2YEAR Replacement Warranty

Tested & Recommended Dimmers:

Brand	Part No.
CLA	VELA
LEGRAND	Cat AR400A3PM
CLIPSAL	32ELEDM, 32E450TM, 31E2RUDM, 32E450UDM
DIGINET	MEDM





CF28-29DIM
(Clear Diffuser)


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CF26DIM	GLOBE LED CARBON LOOK BC ST64 8W	B22	2700K	800LM	8=75W	>80	Ø64x140mm	1/25/100
CF27DIM	GLOBE LED CARBON LOOK BC ST64 8W	B22	6000K	800LM	8=75W	>80	Ø64x140mm	1/25/100
CF28DIM	GLOBE LED CARBON LOOK E27 ST64 8W	E27	2700K	800LM	8=75W	>80	Ø64x140mm	1/25/100
CF29DIM	GLOBE LED CARBON LOOK E27 ST64 8W	E27	6000K	800LM	8=75W	>80	Ø64x140mm	1/25/100

ST57 Filament LED Globes

LED

- Input voltage range: 220-250V AC 50/60Hz
- Cap base: aluminium
- Diffuser: amber tinge/ vintage colour glass
- Power factor: ≥0.4
- Ambient temperature: -15 to 40°C
- Not suitable for dimming

25,000hr Lifetime | IP42 Rated | 3YEAR Replacement Warranty





CF5A
(Amber Diffuser)

Part No.	Description	Base	Kelvin	Lumens	Watt	Beam Angle	CRI	Dimensions	Carton QTY
CF5A	GLOBE LED CARBON LOOK BC ST57	B22	2200K	380LM	4=40W	360°	80	Ø57x126mm	1/60
CF6A	GLOBE LED CARBON LOOK ES ST57	E27	2200K	380LM	4=40W	300°	80	Ø57x132mm	1/60

PAR38 LED Globes

LED

- Input voltage range: 185-265V AC 50/60Hz
- Driver input: 130mA
- Driver output: 250mA
- Housing: Aluminium & PC
- LED chips: 36pcs SMD2835 LED
- Ambient temperature: -25 to 45^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors






SUB3

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
SUB3	GLOBE LED ES PAR38 (White P/C) 15W	E27	3000K	1300LM	15W	>80	Ø122x135mm	1/24

- Input voltage range: 220-240V
- Diffuser & housing: plastic
- Heat sink: PBT
- LED chips: 15pcs SMD2835 LED
- Power factor: >0.5
- Ambient temperature: -20 to 40^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors






PAR3802

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
PAR3802	GLOBE LED ES PAR38 15W	E27	5000K	1300LM	15W	>80	Ø120x132mm	1/10

PAR30 LED Globes

LED

- Input voltage range: 185-265V AC 50/60Hz
- Constant current driver included
- Housing: PBT, aluminium & PC
- Heat sink: PBT & aluminium
- LED chips: 10pcs SMD2835
- Power factor: ≥0.5
- Ambient temperature: -10 to 40^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor
- Suitable for CLA SEC series security lights





PAR3001

Suitable for CLA SEC series security lights

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
PAR3001	GLOBE LED ES PAR30 (Black P/C) 10W 5000K	E27	5000K	800LM	10W	80	Ø96x95mm	1/50

R63 & R80 LED Globes

LED

- Input voltage: 240V AC 50/60Hz
- Aluminium Heatsink with thermal conductive plastic
- Diffuser: frosted PC
- LED chips: SMD2835 LED
- Power factor: 0.5
- Ambient temperature: -20 to 55^{0}C
- Humidity 25+- 2°C≤90%
- Not suitable for dimming





R63L1-2B


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	LEDs	Dimensions	Carton QTY
R63L1B	GLOBE LED ES REFL FR R63	E27	3000K	640LM	8=50W	80	7pcs	Ø63x103mm	1/10/100
R63L2B	GLOBE LED ES REFL FR R63	E27	5000K	640LM	8=50W	80	7pcs	Ø63x103mm	1/10/100
R80L1B	GLOBE LED ES REFL FR R80	E27	3000K	810LM	10=65W	80	9pcs	Ø80x114mm	1/50
R80L2B	GLOBE LED ES REFL FR R80	E27	5000K	810LM	10=65W	80	9pcs	Ø80x114mm	1/50

Pilot Filament LED Globes

LED

- Input voltage range: 240V AC 50/60Hz
- Housing: aluminium
- Diffuser: clear glass
- LED chips: 4pcs LED filament
- Power factor: >0.4
- Ambient temperature: -20 to 50^{0}C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or microwave sensor

25,000hr Lifetime | 360^0 Beam Angle | IP20 Rated | 2YEAR Replacement Warranty





PILOT01

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
PILOT01	GLOBE LED PILOT filament 3W 3000K ST26	E14	3000K	300LM	3W	>80	Ø26x60mm	1/25/200

T30 Filament LED Globes


LED

- Input voltage: 220-240V
- Material: amber glass & aluminium
- LED chips: 4x24pcs 5131JC
- Power factor: >0.7
- CRI: >80
- Ambient temperature: -20 to 50^{0}C
- Suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with sensors

25,000hr Lifetime | 360^0 Beam Angle | IP20 Rated | DIMMABLE | 2YEAR Replacement Warranty

Tested & Recommended Dimmers:

Brand	Part No.
DIGINET	MEDM
CLA	VELA
CLIPSAL	32ELEDM, 32E450TM, 31E2RUDM, 32E450UDM
LEGRAND	CAT AR400A3PM

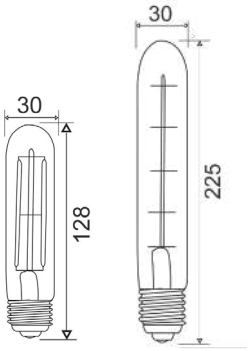



CF47DIM CF46DIM


Part No.	Description	Kelvin	Lumens	Wattage	Dimensions	Carton QTY
CF46DIM	GLOBE LED DIMM T30 filament	2700K	500LM	5W	Ø30x225mm	1/25/100
CF47DIM	GLOBE LED DIMM T30 filament	2700K	400LM	4W	Ø30x128mm	1/25/100

R7 LED Globes

LED

- LED R7S globes
- Input Voltage range: 220-240V
- Diffuser: clear glass
- Housing: glass & ceramic
- Heatsink: glass
- LED chips: 1 COB LED
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching & sensors

25,000hr Lifetime | 360° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty

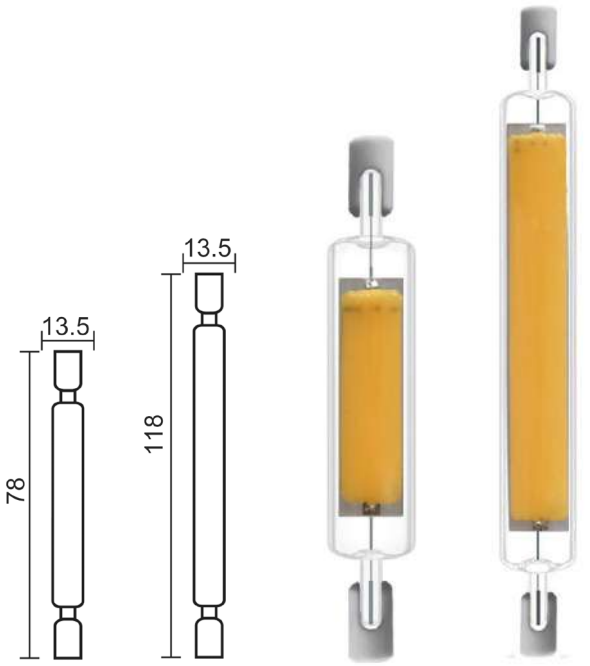


R77 & R78 R75 & R76

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
R75	GLOBE LED R7 118mm 8W 3000K 360D	R7	3000K	1000LM	8W	80	Ø13.5x118mm	1/500
R76	GLOBE LED R7 118mm 8W 5000K 360D	R7	5000K	1000LM	8W	80	Ø13.5x118mm	1/500
R77	GLOBE LED R7 78mm 4W 3000K 360D	R7	3000K	400LM	4W	80	Ø13.5x78mm	1/500
R78	GLOBE LED R7 78mm 4W 5000K 360D	R7	5000K	400LM	4W	80	Ø13.5x78mm	1/500

- Input voltage range: 220-250V AC 50/60Hz
- Heat sink: aluminium
- LED chips: SMD2835 LED
- Power factor: ≥0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR sensors

25,000hr Lifetime | 360° Beam Angle | IP42 Rated | 3YEAR Replacement Warranty

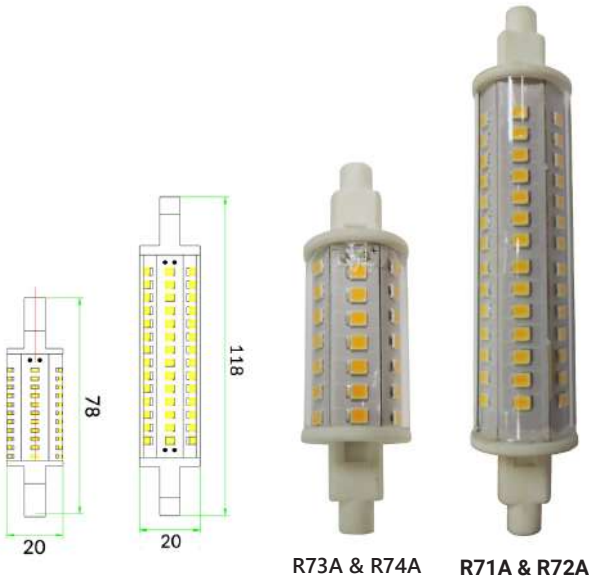


R73A & R74A R71A & R72A


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
R71A	GLOBE LED R7 118mm 8W 3000K 360D	R7	3000K	780LM	8W	80	Ø20x118mm	1/100
R72A	GLOBE LED R7 118mm 8W 5000K 360D	R7	5000K	780LM	8W	80	Ø20x118mm	1/100
R73A	GLOBE LED R7 78mm 4W 3000K 360D	R7	3000K	380LM	4W	80	Ø20x78mm	1/200
R74A	GLOBE LED R7 78mm 4W 5000K 360D	R7	5000K	380LM	4W	80	Ø20x78mm	1/200

Spectra Firework Effect LED Globes LED

- LED firework effect decorative globes
- Input Voltage range: 220-250V AC 50/60Hz
- Power factor: ≥0.4
- Heat sink: aluminium
- LED chips: 42pcs SMD2835 LED
- Ambient temperature: -20 to 50°C
- Not suitable for dimming

25,000hr Lifetime | 330° Beam Angle | IP42 Rated | 3YEAR Replacement Warranty



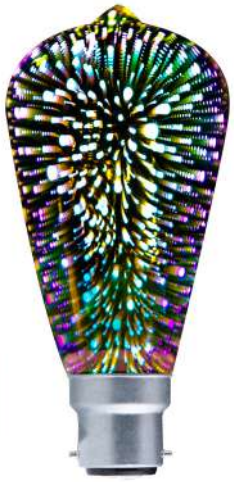

SPECTRA01
(Light On)




SPECTRA04
(Light On)


Part No.	Description	Base	Lumens	Watt	CRI	Dimensions	Carton QTY
SPECTRA01	GLOBE LED Firework Effect BC ST57 PEAR 4W	B22	50LM	4W	80	Ø64x140mm	1/100
SPECTRA02	GLOBE LED Firework Effect ES ST57 PEAR 4W	E27	50LM	4W	80	Ø64x140mm	1/100
SPECTRA03	GLOBE LED Firework Effect BC G125 4W	B22	50LM	4W	80	Ø125x164mm	1/20
SPECTRA04	GLOBE LED Firework Effect ES G125 4W	E27	50LM	4W	80	Ø125x164mm	1/20

Chama Flame Effect LED Globes LED

- LED decorative flame effect globes
- Input Voltage range: 100-245V AC 50/60Hz
- Heat sink: aluminium & PC
- Diffuser: opal glass
- LED chips: 99pcs SMD2835 LED
- Power factor: ≥0.55
- Ambient temperature: -20 to 50°C
- 3 Modes cycle with no memory retention (by turning off and on)
- Not suitable for dimming
- Suitable for 2 way switching

50,000hr Lifetime | 230° Beam Angle | IP20 Rated | 2YEAR Replacement Warranty



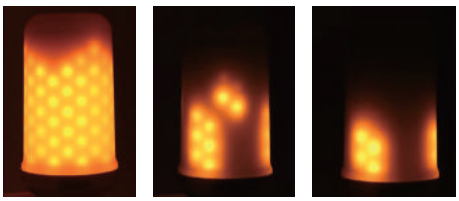

FULLY LIT | FLAME | BEACON



3 modes cycle with no memory retention

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CHAMA001	GLOBE LED ES FIRE 5W 3 modes	E27	1300K	150LM	5W	-	Ø54x125mm	1/20
CHAMA002	GLOBE LED BC FIRE 5W 3 modes	B22	1300K	150LM	5W	-	Ø54x125mm	1/20

Bug LED Globes

LED

- LED A60 anti insect repellent yellow globes
- Input voltage range: 220-240V AC 50/60Hz
- Yellow tube, insect repelling globes
- Housing & heat sink: Aluminum-plastic
- LED chips: 7pcs SMD2835 LED
- Power factor: 0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

25,000hr Lifetime | 160^0 Beam Angle | IP20 Rated | 2YEAR Replacement Warranty



BUG003

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
BUG003	GLOBE LED BC GLS (A60) 7W INSECT YELLOW	B22	1500K	350LM	7W	-	Ø60x110mm	1/100
BUG004	GLOBE LED ES GLS (A60) 7W INSECT YELLOW	E27	1500K	350LM	7W	-	Ø60x113mm	1/100

3U 12V AC/DC LED Globes

LED

- Input voltage: 12V AC/DC 50/60Hz
- Nominal current: 1A
- Material: PBT & glass
- LED chips: 48pcs 2835 LED
- Ambient temperature: -15 to 50^{0}C
- Not suitable for dimming
- Recommended iron core(only) transformer & Constant Voltage LED driver

25,000hr Lifetime | 270^0 Beam Angle | IP20 Rated | 2YEAR Replacement Warranty



3U001-003


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
3U001	GLOBE LED 12V AC/DC ES 3U 9W 3000K	E27	3000K	720LM	9W	80	Ø41x140mm	1/10/100
3U002	GLOBE LED 12V AC/DC ES 3U 9W 4000K	E27	4000K	760LM	9W	80	Ø41x140mm	1/10/100
3U003	GLOBE LED 12V AC/DC ES 3U 9W 6500K	E27	6500K	780LM	9W	80	Ø41x140mm	1/10/100

GX53 LED Globes

LED

- Input voltage range: 220-250V AC 50/60hz
- LED chips: 24pcs Epistar LED
- Power factor: ≥0.5
- Ambient temperature: -20 to 50°C
- Not suitable for dimming







GX53001-002


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
GX53001	GLOBE LED GX53 6W 3000K 180D	GX53	3000K	500LM	6W	80	Ø74x27mm	1/10/100
GX53002	GLOBE LED GX53 6W 5000K 180D	GX53	5000K	520LM	6W	80	Ø74x27mm	1/10/100

G9 LED Globes

LED

- Input voltage: 240V AC
- LED chips: SMD2835 LED
- Power factor: >0.4
- Material: ceramic lamp holder & PC diffuser
- Ambient temperature: -20 to 50°C
- Not suitable for dimming








G90001-0002

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
G90001	GLOBE LED G9 3W 3000K 330D	G9	3000K	240LM	3W	80	Ø16x50mm	1/500
G90002	GLOBE LED G9 3W 5000K 330D	G9	5000K	270LM	3W	80	Ø16x50mm	1/500

G4 LED Globes

LED

- Input voltage: 12V AC/ DC
- Diffuser: clear silicon finish
- Housing: silicon
- Diffuser: PC
- LED chips: 1pc COB LED
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor
- Remote AC or DC control gear required



Tested & Recommended Drivers / Transformer:

CLADR12WFP, DRIV1, OTTER1, CLA111011, CLA113011, OTTER3, OTTER4, OTTER5, CLA1120011, OTTER7, ETH50.302VA (Transformer)



G403

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
G403	GLOBE LED 12V AC/DC G4 1.5W	G4	3000K	150LM	1.5W	>80	Ø11x40mm	100/1000

- Input voltage: 12V AC/ DC
- Material: PC
- Heatsink: ceramic
- Diffuser: PC
- LED chips: 18pcs SMD2835
- CRI: ≥ 80
- Power factor: 0.5
- Ambient temperature: -10 to 35^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR sensor
- Remote AC or DC control gear required





G401


Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
G401	GLOBE LED 12V AC/DC G4	G4	3000K	160LM	1.5W	≥80	Ø14.8x39.8mm	1/200

PLC LED Globes

LED


- Input voltage: 220-240V AC 50Hz
- Constant current LED driver inbuilt
- Housing & diffuser: PC
- Heat sink: PC & aluminium
- Diffuser: PC
- Rotating base
- LED chips: 30pcs SMD2835
- Power factor: >0.5
- CRI: >80
- Ambient temperature: -15 to 50^{0}C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors







- When retrofitting luminaire with ballast, bypass the ballast and rewire the circuit as per the 2nd wiring example shown below.
- 2 year replacement warranty based on max. 8hrs usage per day

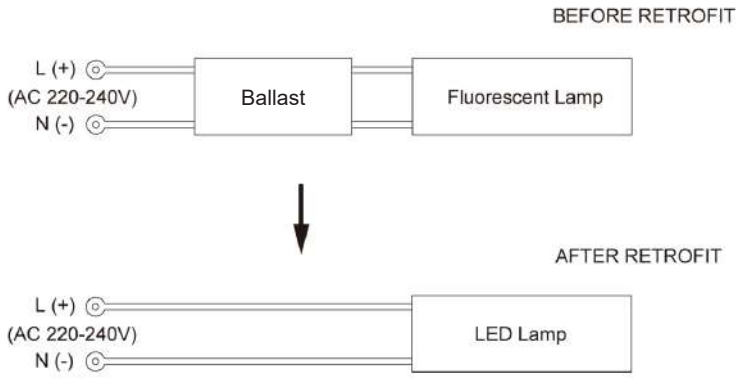

Part No	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
PLC003	GLOBE LED G24D PLC 2 PIN Rotatable Base 9W 4000K 810 Lm	G24D	4000K	810LM	9=60W	161.7x28x-28mm	1/25

Elliptical LED Globes

LED











ELLIP01-04

- LED elliptical globes
- Input voltage range: 180-240V AC 50/60Hz
- Inbuilt constant current driver included
- No control gear should be in the circuit
- Driver output voltage: 72V
- Housing: PC
- Heat sink: Die cast aluminium
- LED chips: S5 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50^{0}C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors





ELLIP01-02



ELLIP03-04

Part No.	Description	Base	Kelvin	Lumens	Watt	CRI	LEDs	Dimensions	Carton QTY
ELLIP01	GLOBE LED ES ELLIPTICAL 25W	E27	3000K	1700LM	25W	80	24pcs S5	Ø75x235mm	1/20
ELLIP02	GLOBE LED ES ELLIPTICAL 25W	E27	5000K	2100LM	25W	80	24pcs S5	Ø75x235mm	1/20
ELLIP03	GLOBE LED E40 ELLIPTICAL 45W	E40	3000K	3100LM	45W	80	48pcs S5	Ø98x280mm	1/10
ELLIP04	GLOBE LED E40 ELLIPTICAL 45W	E40	5000K	3800LM	45W	80	48pcs S5	Ø98x280mm	1/10


Oyster Conversion Kits LED Globes

LED Tri-CCT






CKTRI01-03



Internal Diameter: 153

CKTRI01



Internal Diameter: 190

CKTRI02 & CKTRI03

- LED Tri-CCT oyster conversion kits
- Input voltage range: 220-240V AC 50Hz
- Constant current LED driver included
- Clear diffuser: PC
- Heatsink: PCB & aluminium
- Tri-CCT (3000K/ 4000K/ 5000K) switch on driver
- LED chips: SMD2835
- Power factor: >0.8
- CRI: 80
- Not suitable for dimming
- 2 wire input
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors
- Ambient temperature: -20 to 45^{0}C
- Suitable for commercial use



Part No.	Description	Lumens			Watt	CRI	Mounting Plate	Carton QTY
		3000K	4000K	5000K				
CKTRI01	GLOBE LED OYSTER CONVERSION KIT Tri-CCT	1000LM	1200LM	1150LM	12W	80	Ø193mm	1/60
CKTRI02	GLOBE LED OYSTER CONVERSION KIT Tri-CCT	1700LM	1800LM	1750LM	18W	80	Ø230mm	1/60
CKTRI03	GLOBE LED OYSTER CONVERSION KIT Tri-CCT	2150LM	2400LM	2250LM	24W	80	Ø230mm	1/60

T8 Tubes LED Globes

LED Tri-CCT






PT8TRI1-3




LED Starter Incl.

- Input voltage: 220-240V 50/60Hz
- Inbuilt Constant Current LED driver
- Heatsink: PC
- LED chips: SMD2835 LEDs
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on the end of the tube
- **LED starter included**
- Tube base: G13
- CRI: >80
- Power factor: >0.5
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors
- Double insulated




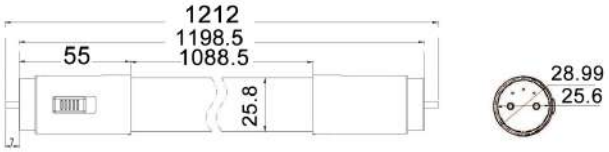

PT8TRI1 Line Drawings

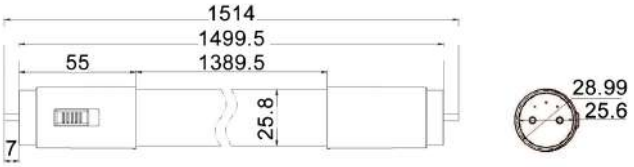

PT8TRI2 Line Drawings

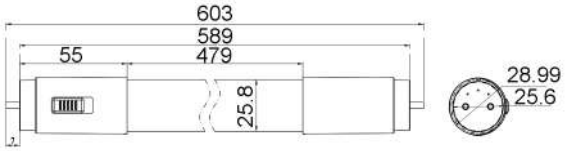

PT8TRI3 Line Drawings

Part No	Description	Lumens			Watt	CRI	PF	Length	Carton QTY
		3000K	4000K	5700K					
PT8TRI1	GLOBE LED T8 TUBE TRI 18W 4FT	1800lm	2050lm	1900lm	18W	>80	>0.5	1212mm	1/40
PT8TRI2	GLOBE LED T8 TUBE TRI 24W 5FT	2400lm	2700lm	2550lm	24W	>80	>0.5	1514mm	1/40
PT8TRI3	GLOBE LED T8 TUBE TRI 9W 2FT	900lm	1000lm	900lm	9W	>80	>0.5	603mm	1/40




PT82FT4 & PT818W5FT

- Input voltage range: 220-240V AC 50/60Hz
- Heat sink: PC
- LED chips: SMD2835 LED
- Power factor: ≥0.9
- For indoor use only
- Ambient temperature: -20 to 40^{0}C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or microwave sensor
- Warranty: please see table below




INSTALLATION INSTRUCTIONS

1. Wiring example of a single circuit luminaire with electronic ballast

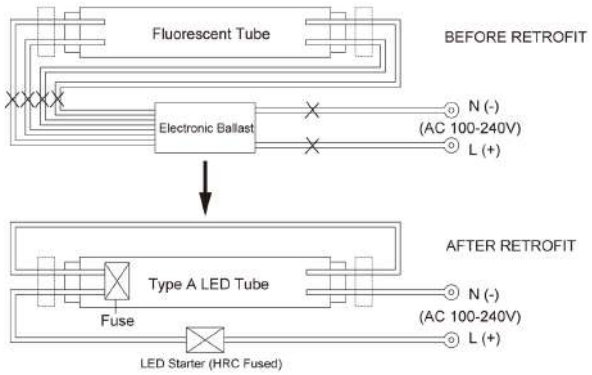

2. Wiring example of a single circuit luminaire with magnetic ballast

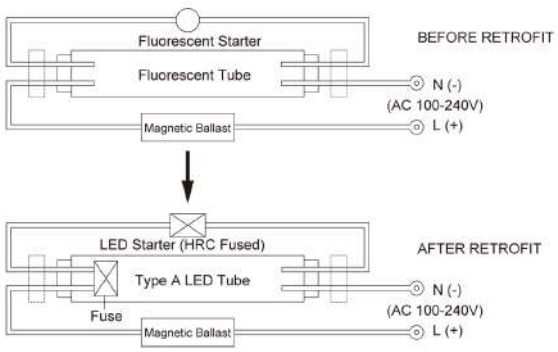

Part No.	Description	Kelvin	Lumens	Watt	CRI	Beam Angle	WTY	Dimensions	Carton QTY
PT82FT4	GLOBE LED T8 TUBE 9W 2FT	6000K	850LM	9W	80	165^0	3 year	Ø28x589mm	1/25
PT818W5FT	GLOBE LED T8 TUBE 18W 5FT	3000K	1620LM	18W	80	120^0	2 year	Ø28x1507mm	1/20



GLOBES | **FLUORESCENT GLOBES**

2D Fluorescent Globes

- 2 pin comes with integral starter
- 2 pin only suitable for use with conventional control gear
- 8 times the life of incandescent
- GR8 base
- Not suitable for dimming



Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
2D28WGR8DL	GLOBE FL GR8 2D 2 PIN 28W 6400K	GR8	6400K	1930LM	28W	205x207mm	1/40

T5 Tube Fluorescent Globes

- Triphosphor powder coated for 20-40% increase in light output and life
- G10q base
- 4 pins together
- Not suitable for dimming



Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLAT514WWW	GLOBE FL G5 T5 TUBE 14W 3000K	G5	3000K	1230LM	14W	Ø17x549mm	1/200
CLAT514WNW	GLOBE FL G5 T5 TUBE 14W 5000K	G5	5000K	1140LM	14W	Ø17x549mm	1/100

T9 Circular Fluorescent Globes

- Triphosphor powder coated for 20-40% increase in light output and life
- G10q base
- 4 pins together
- Not suitable for dimming



Part No.	Description	Base	Kelvin	Lumens	Watt	Diam	Carton QTY
CLAFCL22WWW	GLOBE FL G10Q T9 CIRC 22W TRIPHOS	G10Q	3000K	1250LM	22W	Ø209mm	1/20
CLAFCL32WCW	GLOBE FL G10Q T9 CIRC 32W TRIPHOS	G10Q	4000K	2200LM	32W	Ø307mm	1/20
CLAFCL32WDL	GLOBE FL G10Q T9 CIRC 32W TRIPHOS	G10Q	6400K	2100LM	32W	Ø307mm	1/20
CLAFCL40WNW	GLOBE FL G10Q T9 CIRC 40W TRIPHOS	G10Q	5000K	2850LM	40W	Ø400mm	1/20

PL DU Fluorescent Globes

- 8 times the life of incandescent globes
- Excellent colour rendering
- Double U tube fluorescent
- 2 pin comes with integral starter
- 2 pin only suitable for use with conventional control gear
- Not suitable for dimming



Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
DU10WG24D1CW	GLOBE FL G24d-1 PLC 2 PIN 10W 4200K	G24d-1	4200K	630LM	10W	35x115mm	1/50

PL DUE Fluorescent Globes

- 8 times the life of incandescent globes
- Excellent colour rendering
- 4 pin comes with integral starter
- 4 pin is suitable for use with AC mains, DC mains, solar cell & batteries etc
- Not suitable for dimming



Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
DUE18WG24D2WW	GLOBE FL G24q-2 PLC 4 PIN 18W	G24Q-2	3100K	1180LM	18W	35x146mm	1/100
DUE26WWW4PIN	GLOBE FL G24q-3 PLC 4 PIN 26W	G24Q-3	3100K	1500LM	26W	35x168mm	1/100




GLOBES | CARBON FILAMENT GLOBES

G95 Carbon Filament Globes

- Decorative globes
- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Ambient temperature: -30 to 100^{0}C
- Suitable for dimming
- **Not recommended for fan lights**



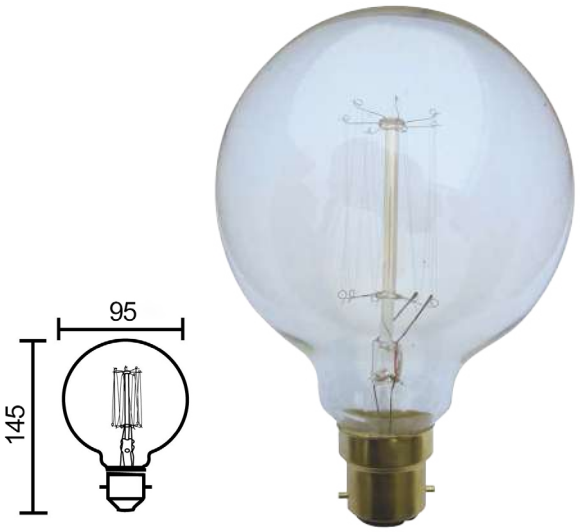

Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLACFA25BC	GLOBE CARBON BC G95 25W 2000K	B22	2000K	50LM	25W	Ø95x145mm	1/10/50
CLACFA25ES	GLOBE CARBON ES G95 25W 2000K	E27	2000K	50LM	25W	Ø95x145mm	1/10/50

G125 Carbon Filament Globes

- Decorative globes
- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Ambient temperature: -30 to 100^{0}C
- Suitable for dimming
- Not recommended for fan lights






Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLACFB25BC	GLOBE CARBON BC G125 25W 2000K	B22	2000K	50LM	25W	Ø125x165mm	1/10/20
CLACFB25ES	GLOBE CARBON ES G125 25W 2000K	E27	2000K	50LM	25W	Ø125x165mm	1/10/20

ST57 Carbon Filament Globes

- Decorative globes
- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Ambient temperature: -30 to 100^{0}C
- Suitable for dimming
- **Not recommended for fan lights**



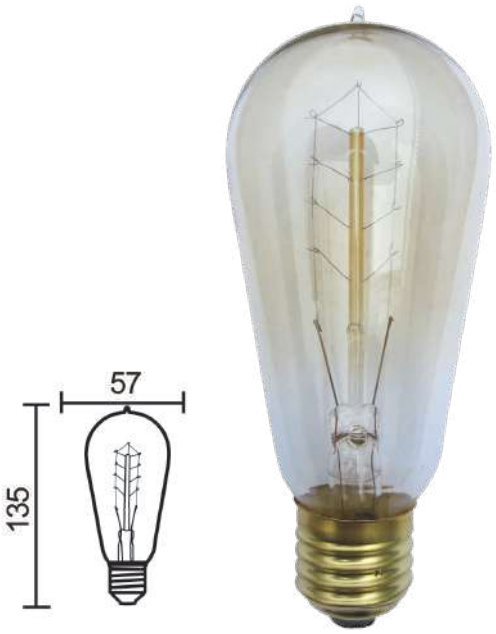


Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLACFC25BC	GLOBE CARBON BC ST57 25W 2000K	B22	2000K	50LM	25W	Ø57x135mm	1/10/50
CLACFC25ES	GLOBE CARBON ES ST57 25W 2000K	E27	2000K	50LM	25W	Ø57x135mm	1/10/50

T45 Carbon Filament Globes

- Decorative globes
- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Ambient temperature: -30 to 100^{0}C
- Suitable for dimming
- **Not recommended for fan lights**



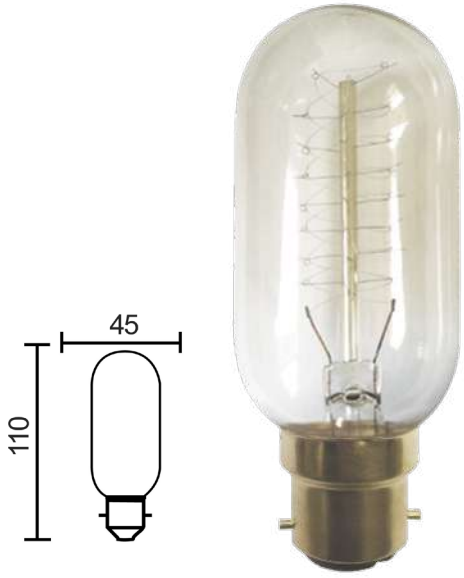


Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLACFD25BC	GLOBE CARBON BC T45 25W 2000K	B22	2000K	50LM	25W	Ø45x110mm	1/10/100
CLACFD25ES	GLOBE CARBON ES T45 25W 2000K	E27	2000K	50LM	25W	Ø45x110mm	1/10/100

T9 Carbon Filament Globes

- Decorative globes
- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Ambient temperature: -30 to 100^{0}C
- Suitable for dimming
- **Not recommended for fan lights**








Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLACFE25BC	GLOBE CARBON BC T9 25W 2000K	B22	2000K	50LM	25W	Ø29x178mm	1/10/100
CLACFE25ES	GLOBE CARBON ES T9 25W 2000K	E27	2000K	50LM	25W	Ø29x178mm	1/10/100

- Decorative globes
- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Ambient temperature: -30 to 100^{0}C
- Suitable for dimming
- **Not recommended for fan lights**







Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLACFF25BC	GLOBE CARBON BC T9 25W 2000K	B22	2000K	50LM	25W	Ø30x295mm	1/10/100
CLACFF25ES	GLOBE CARBON ES T9 25W 2000K	E27	2000K	50LM	25W	Ø30x295mm	1/10/100



GLOBES | **HEAT LAMP GLOBES**

Heat Lamp Globes

- Input voltage range: 220-240V AC 50/60Hz
- Power factor: 1.0
- Only available in E27 base
- Suitable for use in bathroom
- Suitable for dimming





Part No.	Description	Base	Kelvin	Lumens	Watt	Dimensions	Carton QTY
CLAHL150W	GLOBE REFL ES HEAT/L 150W 2300K	E27	2300K	800LM	150W	Ø125x185mm	1/10
CLAHL275W	GLOBE REFL ES HEAT/L 275W 2800K	E27	2800K	1800LM	275W	Ø125x185mm	1/40



ACCESSORIES | # ELECTRICAL ACCESSORIES

Cluster Electrical Accessories





CLUSTER1
(White)



CLUSTER2
(Black)



CLUSTER3
(White)


- Cluster pendant canopies
- Available in 2 designs: Round (Max.6 lights) & Rectangular (Max.11 lights)
- Colour: Matt black / matt white
- Material: iron
- Surface mounted (Mounting bracket included)


IP20 Rated

1 YEAR Replacement Warranty



CLUSTER4
(Black)



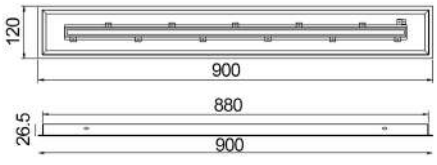

Part No.	Description	Dimensions	Carton QTY
CLUSTER1	RND Surface Mounted Cluster Canopy 6 Lights White	Ø220x26.5mm	1/10
CLUSTER2	RND Surface Mounted Cluster Canopy 6 Lights Black	Ø220x26.5mm	1/10
CLUSTER3	RECT Surface Mounted Cluster Canopy 11 Lights White	900x120x26.5mm	1/10
CLUSTER4	RECT Surface Mounted Cluster Canopy 11 Lights Black	900x120x26.5mm	1/10

Dimmers Electrical Accessories

- Fits Australian standard wall switch plate apertures (eg. the trader ranges, plus HPM, Legrand and Clipsal ranges)
- Separately switched 2-wire design-no neutral wire connection required for wall plate retrofit installation
- Inbuilt overload protection and short circuit protection
- Incorporates a thermal fuse
- Rotary control
- Protected against damage from connection to incompatible inductive load types (ig. motor loads), via conduction angle wind-back
- Complies with all relevant Australian standards
- "Soft-start" help prolong lamp and driver life
- Rated power: 300W
- Operating temperature: 0 to 35^{0}C




LYNX1

Product Application:

- Can directly replace the existing wall switch to adjust dimmable LED lamp, halogen lamp and dimmable CFL.
- Suitable for public places such as family bedroom. apartment, hotel, and hospital and so on.

3YEAR Replacement Warranty

Part No.	**LYNX1**	
Operating Voltage	220-240V 50Hz	
Max.Current	1.25A	
Rated Power	300W	
Load Range	Incandescent lamp	15-300W
	LED lamp	3-200W
	halogen lamp	15-300W
	Low voltage halogen lamp with electronic transformer	3-200W
	CFL - fewer than 5pcs	3-200W
	Electric resistive heat	15-300W
Power Supply	Live wire	
Operating Temperature	0 to 35^{0}C	
Operating Humidity	10% R.H. - 90% R.H.	
Size	L23.7mm x W23.7mm x H60mm	
Application	Indoor	
Product Configuration	1. This product can adjust the brightness of the lamp through the rotary. 2. This product has over temperature, over current and short circuit protection functions.	
Product application	1. Can directly replace the existing wall switch to adjust dimmable LED lamp, halogen lamp and dimmable CFL. 2. Suitable for public places such as family bedroom. apartment, hotel, and hospital and so on.	

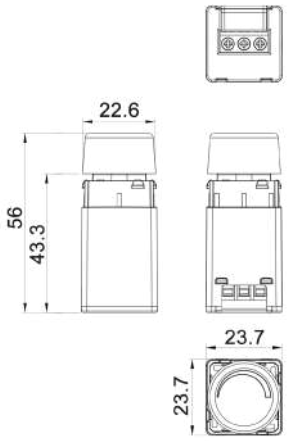

- Push button LED trailing dimmer
- Soft start
- Overload protection & short circuit protection
- Easy to mount in most Australian plates
- Suitable for dimming dimmable LED globes, incandescent globes, high voltage halogen globes, electronic transformers with low voltage halogen globes
- Long press dimming button to dim
- Short press dimming button to on/off
- Comes with 2 face caps round & square edged to suit most Australian plates

IP20 Rated | 3YEAR Replacement Warranty



VELA


Programming:

Minmum brightness setting

(1) Remove the top cap
(2) Long press programming button until LED flashes slowly
(3) Long press dimming button to set level
(4) Double press dimming button to exit programming mode

Maximum brightness settting

(1) Remove the top cap
(2) Long press programming button until LED flashes, short press programming button, until LED starts to flash fast
(3) Long press dimming button to set level
(4) Double press dimming button to exit program mode

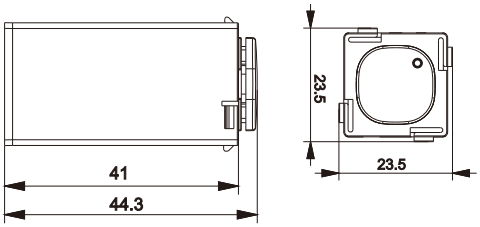


Techcnial Data:

Part No.	**VELA**
Nominal Operating Voltage	220-240V
Nominal Operating Frequency	50Hz
Maximum Load	350VA
Minimum Load	10VA
Dimming Technique	Trailing Edge Phase Control
Mounting Centres	84mm Australian Pattern Plate
Safety Compliance	AS/NZS 3100, AS/NZS 3133, IEC 60669-2-1
EMC Compliance	AS/NZS CISPR15, IEC 60669-2-1 (26.1, 26.2), IEC 61000-3-2 (Excepting when used in conjunction with Electronic loads)
Specifications Typical @240V 25^{0}C	
Suitable for Indoor Use only	
No User Serviceable Parts Inside	





SENS001
(White)







SENS002
(Black)

- Infrared motion surface mounted sensors
- Available in white and black fitting colour


IP65 Rated | **5 YEAR Replacement Warranty**

Part No.	SENS001, SENS002
Mounting Type	Surface Mounted
Input voltage	220-240V AC 50/60Hz
Detection Range	180^0
Detection Distance	12m Max (<24^0C)
Detection Motion Speed	0.6-1.5m/s
Rated Load	1200W HAL/ 300W CFL/ 300W LED
Time Delay	Min.10sec±3sec Max.15min±2min (Restarts from last movement)
Ambient Light	<3-2000lux (adjustable)
Ambient Temp	-20 to +40^0C
Working Humidity	<93%RH
Power Consumption	approx 0.5W
Installation Height	1.8-2.5m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	Yes (1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on (2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on

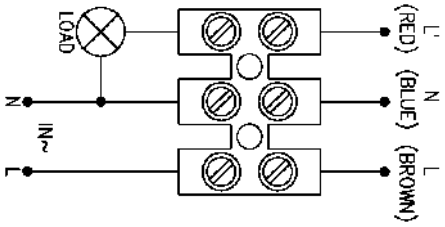

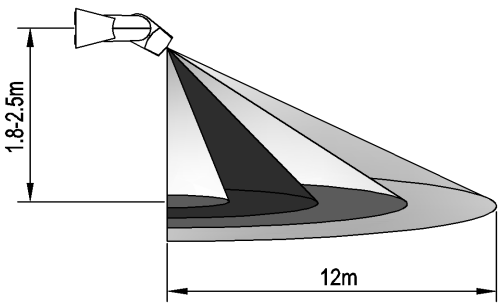

Height of installation: 1.8-2.5m

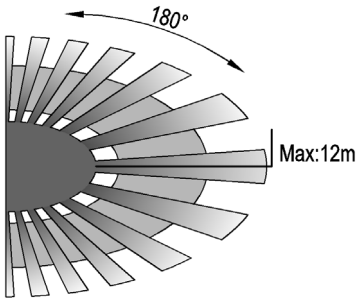


Detection Distance: Max.12m






SENS003
(White)

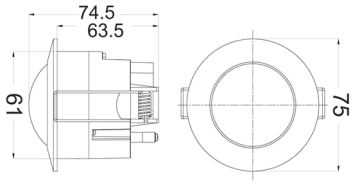


- Infrared motion recessed sensor


IP20 Rated | **5YEAR** Replacement Warranty

Part No.	**SENS003**
Mounting Type	Recessed
Input voltage	220-240V AC 50/60Hz
Detection Range	360^0
Detection Distance	6m Max (<24^0C)
Detection Motion Speed	0.6-1.5m/s
Rated Load	1200W HAL/ 300W CFL / 300W LED
Time Delay	Min.10sec±3sec Max.15min±2min (restarts from last movement)
Ambient Light	<3-2000lux (adjustable)
Ambient Temp	-20 to +40^0C
Working Humidity	<93%RH
Power Consumption	approx 0.5W
Installation Height	2.2-4m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	Yes (1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on (2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on



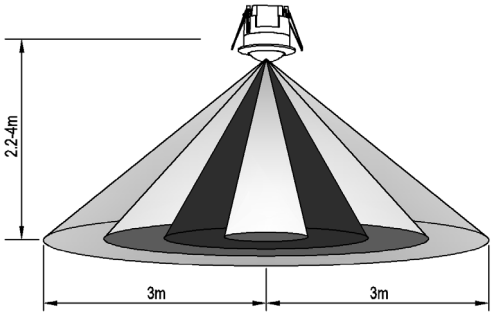

Height of installation: 2.2-4m

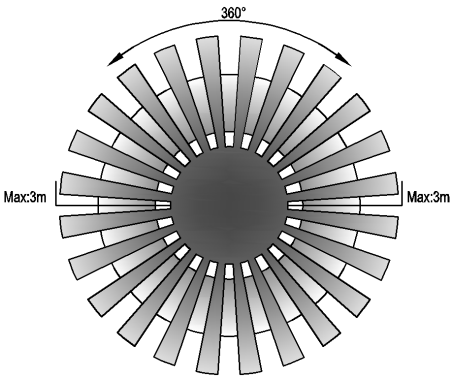


Detection Distance: Max.6m






SENS004
(White)




- Infrared motion surface mounted sensor


IP20 Rated | 5YEAR Replacement Warranty

Part No.	**SENS004**
Mounting Type	Surface Mounted
Input voltage	220-240V AC 50/60Hz
Detection Range	360^0
Detection Distance	6m Max (<24^{0}C)
Detection Motion Speed	0.6-1.5m/s
Rated Load	2000W HAL/ 1000W CFL/ 1000W LED (If lamp higher than 60W is used the distance between lamp & sensor should be a minimum of 60cm)
Time Delay	Min.10sec±3sec Max.15min±2min (restarts from last movement)
Ambient Light	<3-2000lux (adjustable)
Ambient Temp	-20 to +40^{0}C
Working Humidity	<93%RH
Power Consumption	approx 0.5W
Installation Height	2.2-4m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	Yes (1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on (2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on



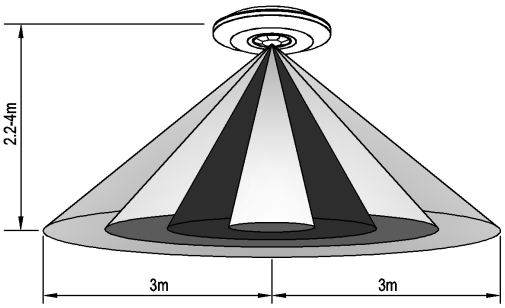

Height of installation: 2.2-4m

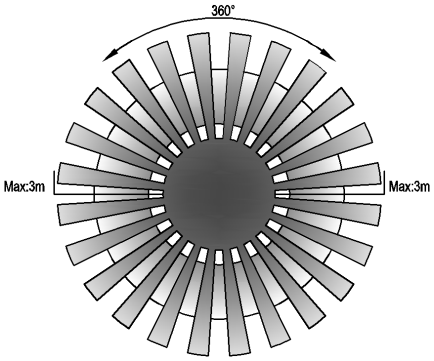


Detection Distance: Max.6m

ACCESSORIES






SENS005
(White)

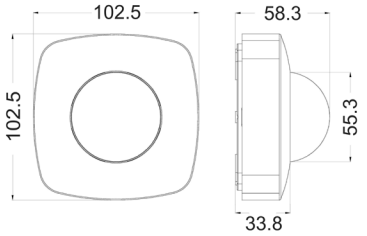


- Infrared motion surface mounted sensor


IP20 Rated | **5YEAR** Replacement Warranty

Part No.	SENS005
Mounting Type	Surface Mounted
Input voltage	220-240V AC 50/60Hz
Detection Range	360^0
Detection Distance	20m Max (<24^0C)
Detection Motion Speed	0.6-1.5m/s
Rated Load	2000W HAL/ 1000W CFL/ 1000W LED
Time Delay	Min.10sec±3sec Max.30min±2min (restarts from last movement)
Ambient Light	<3-2000lux (adjustable)
Ambient Temp	-20 to +40^0C
Working Humidity	<93%RH
Power Consumption	approx 0.5W
Installation Height	2.2-6m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	Yes (1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on (2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on

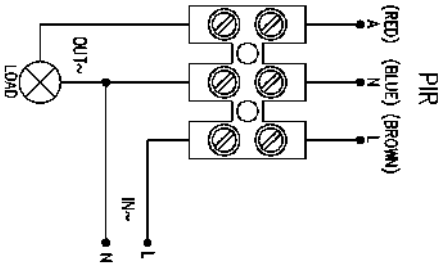

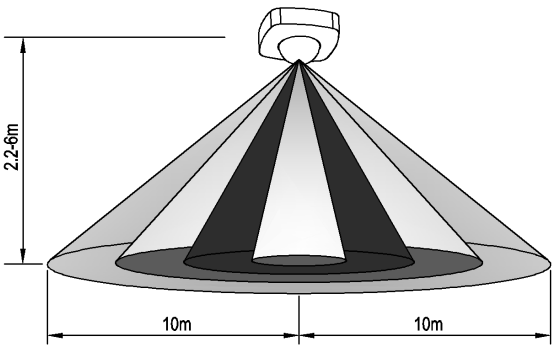



Height of installation: 2.2-6m

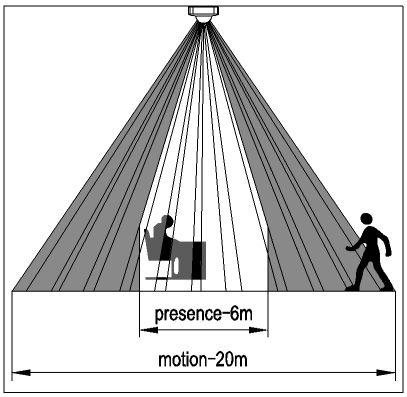


Detection Distance: Max.20m

ACCESSORIES

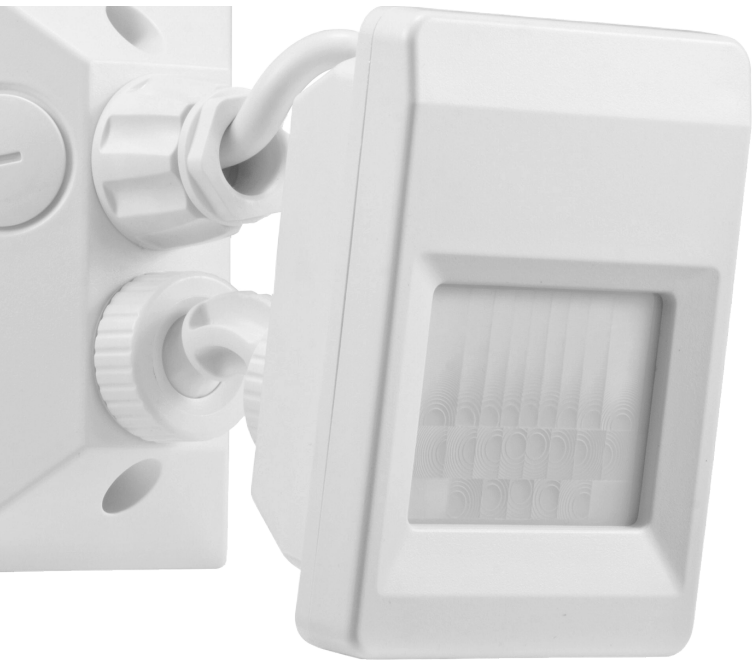



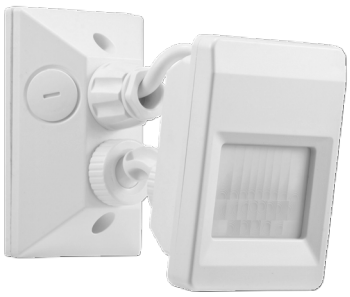

SENS007
(White)




SENS008
(Black)


- Adjustable infrared motion surface mounted sensors
- Available in white and black fitting colour
- Adjustable head
- New improved knuckle

IP66 Rated | 5 YEAR Replacement Warranty


Part No.	SENS007, SENS008
Mounting Type	Surface Mounted
Input voltage	220-240V 50/60Hz
Detection Range	120^0
Detection Distance	12m Max (<24^0C)
Motion Detection Speed	0.6-1.5m/s
Rated Load	2000W HAL/ 1000W CFL/ 1000W LED
Time Delay	Min.10sec±3sec Max.30min±2min (restarts from last movement)
Ambient Light	3-2000Lux
Ambient Temp	-20 to 40^0C
Working Humidity	<93%RH
Power Consumption	approx. 0.5W
Installation Height	1.8-2.5m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	Yes (1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on (2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on

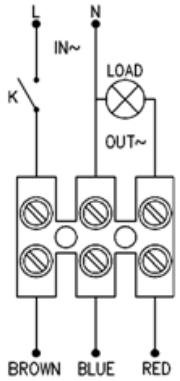

PIR

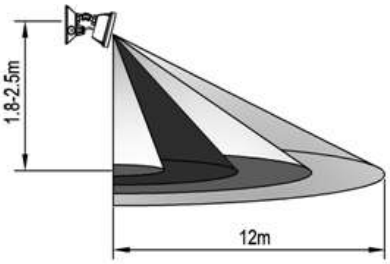


Height of installation: 1.8-2.5m

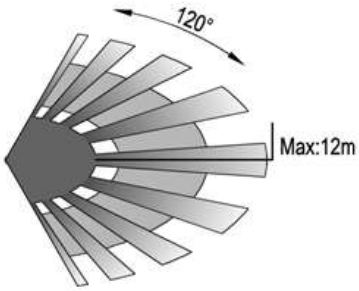

Detection Distance: Max.12m



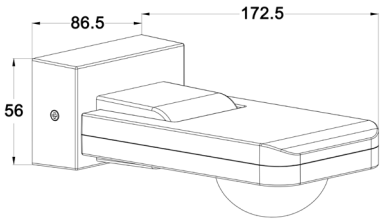



SENS009
(White)




SENS010
(Black)


- Adjustable infrared PIR surface mounted sensors
- Available in white and black
- Adjustable head (90^0 up or down)

IP65 Rated | **5 YEAR** Replacement Warranty

Part No.	SENS009, SENS010
Mounting Type	Surface Mounted
Input voltage	220-240V 50/60Hz
Detection Range	360^0
Detection Distance	20m Max (<24^0C)
Motion Detection Speed	0.6-1.5m/s
Rated Load	2000W HAL/ 1000W CFL/ 1000W LED
Time Delay	Min.10sec±3sec Max.30min±2min (restarts from last movement)
Ambient Light	3-2000Lux (adjustable)
Ambient Temp	-20 to 40^0C
Working Humidity	<93%RH
Power Consumption	approx. 0.5W
Installation Height	2.2-6m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	Yes

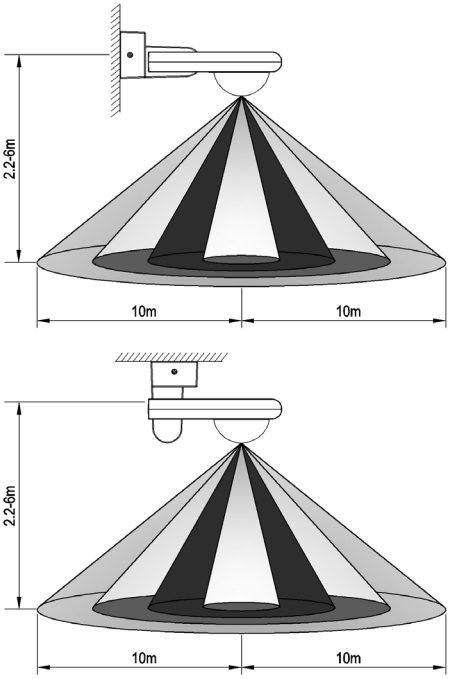

Height of Installation: 2.2-6m

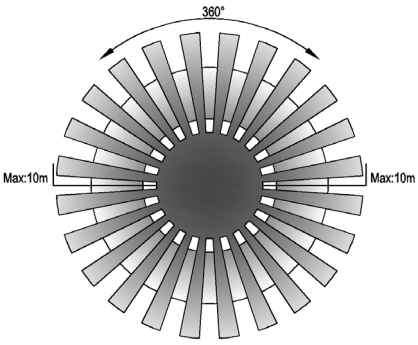


Detection Distance: Max.20m





SENS011
(White)




- Microwave sensor
- To be installed inside a fitting

IP20 Rated | **5YEAR** Replacement Warranty

Part No.	**SENS011**
Mounting Type	To be installed inside a fitting
Input voltage	220-240V AC 50Hz
Detection Range	360⁰
Detection Distance	1-8m (radius) adjustable
Detection Motion Speed	0.6-1.5 m/s
Rated Load	1200W HAL/ 300W CFL/ 300W LED
Hold time	Min. 10 sec ± 3sec Max. 12 min ± 1 min
HF System	5.8 GHz CW radar, ISM band
Ambient Light	<3-2000LUX (adjustable)
Ambient Temp	-20 to 50℃
Power consumption	0.9W
Installation Height	2-6m
Housing Material	PC
IP Rating	IP20
Warranty	5 years replacement
Does not operate through metal	
UV resistant	
No manual override	

TESTING IN DAYLIGHT:

- Turn the LUX dial clockwise to MAXIMUM (sun). Turn the SENS dial clockwise to MAXIMUM (+). Turn the TIME dial anti-clockwise to MINIMUM (10s)



- Switch on the power: The light fitting will turn on and 10sec±3sec later, the light will turn off automatically. If the sensor detects movement, the light will turn on again.
- If no additional movement is detected after 10s (time pre-set in TIME dial for testing purpose), the light will turn off. If the sensor receives a new induction signal before the 10 seconds are up, the timer will restart from when the last movement was detected.

TESTING AT NIGHT:

- Turn LUX dial anti-clockwise to MINIMUM (3). If the ambient light is less than 3LUX, the light will turn on when movement detected.
- If no additional movement is detected after 10s (time pre-set in TIME dial for testing purpose), the light will turn off. If the sensor receives a new induction signal before the 10 seconds are up, the timer will restart from when the last movement was detected.

Once testing is complete, adjust the LUX, SENS and TIME dials as desired.





SENS012
(White)





SENS013
(Black)

- Adjustable infrared PIR surface mounted sensors
- Available in white and black
- Adjustable head (30^0 up or down)

IP44 Rated | **5 YEAR Replacement Warranty**

Part No.	SENS012, SENS013
Mounting Type	Surface Mounted
Input voltage	220-240V 50/60Hz
Detection Range	180^0
Detection Distance	12m Max (<24^{0}C)
Motion Detection Speed	0.6-1.5m/s
Rated Load	1200W HAL/ 600W CFL/ 600W LED
Time Delay	Min.10sec±3sec Max.15min±2min (restarts from last movement)
Ambient Light	<3-2000Lux (adjustable)
Ambient Temp	<24^{0}C
Working Humidity	<93%RH
Power Consumption	approx. 0.5W
Installation Height	1.8-2.5m
Housing Material	PC
UV Resistant	Yes
3 Wire	Yes
Day/ Night Recognition	Yes
Manual Override	No



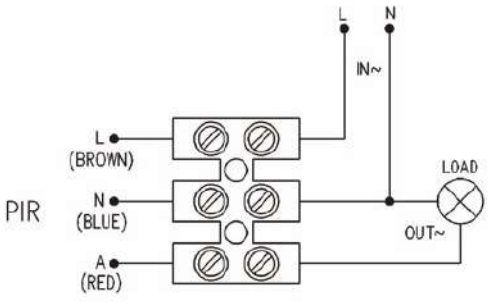

Connectors Electrical Accessories






CONN003




CONN004

- Single or double cable connectors
- Construction material: Transparent PC
- Screw material: copper
- Wiring hole: 6mm
- Max.current: 32A
- CONN003: Box QTY 100pcs only
- CONN004: Box QTY 50pcs only

IP20 Rated | 3YEAR Replacement Warranty

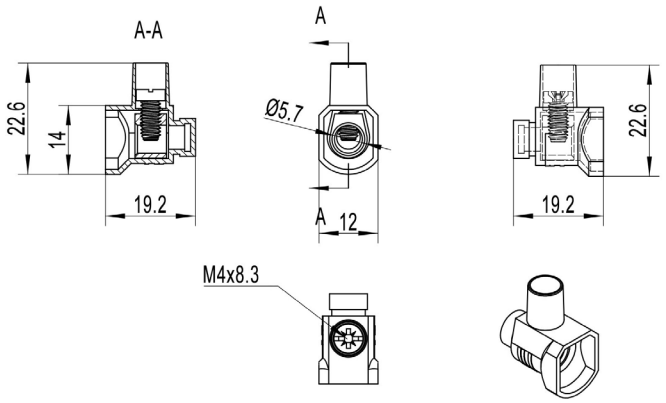

CONN003

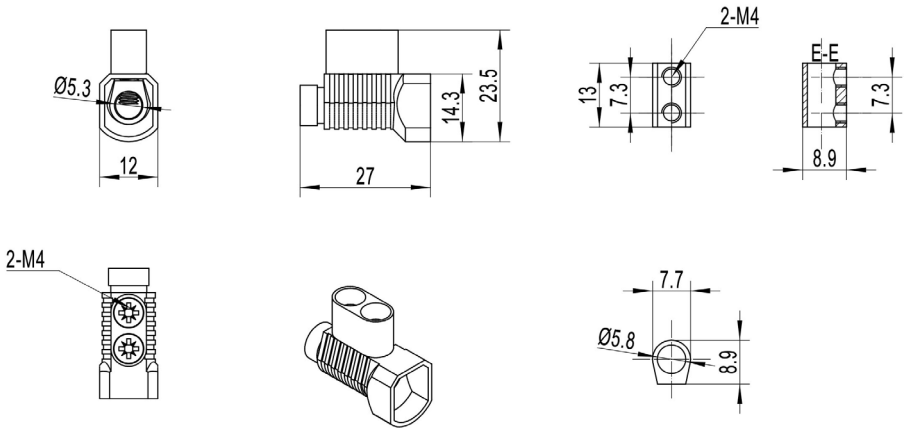

CONN004


Part No.	Description	Max. Current	Wiring Hole	Dimensions	Carton QTY
CONN003	CONNECTOR Single Cable Transparent PC with Copper	32A	1x6mm^2	19.2x12x22.6mm	100/4500
CONN004	CONNECTOR Double Cable 32A Transparent PC	32A	2x6mm^2	27x12x23.5mm	50/1250





CONN005









CONN006



CONN007

- Housing: Nylon + PC
- Conductor: Brass
- Rated Power: CONN005: 24A 450VAC; CONN006-007: 32A 450VAC
- Rated connecting capacity: CONN005: 0.5-2.5mm^2; CONN006-007: 0.5-4.0mm^2
- CONN005 available cable diameter (Rubber): 8-11mm
- CONN006-007 available cable diameter(Rubber): 4-8mm /8-12mm
- CONN005 Extra 8-11mm Rubbers included in the packet
- CONN006-007 Extra 8-12mm Rubbers included in the packet
- Refer to stripping length: External stripping 25mm; Internal stripping 7mm





IP68 Rated

1 YEAR Replacement Warranty









Part No.	Description	Max. Current	Carton QTY
CONN005	CONNECTOR / 2 Way Cable Extension Quick Connect IP68 W/PROOF BLK 24A 450VAC	24A	1/125
CONN006	CONNECTOR / 3 Way T Shape Cable Extension 3Pin Terminal IP68 W/PROOF 32A 450VAC	32A	1/125
CONN007	CONNECTOR / 3 Way Y Shape Cable Extension 3Pin Terminal IP68 W/PROOF 32A 450VAC	32A	1/125

Sockets Electrical Accessories

- 3-Pin quick connection surface socket
- 240V 50Hz
- Material: PC
- 10Amp current rating
- Recommended cable: 1.0mm to 2.5mm
- Product is earthed
- The cable must be stripped back first before placing cable in the socket
- Box QTY of 10pcs only

1YEAR Replacement Warranty

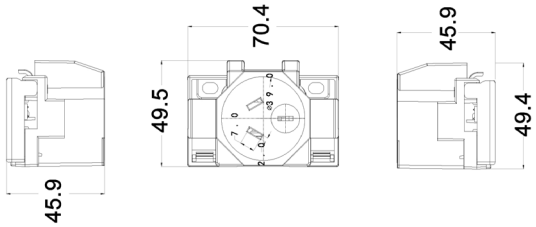

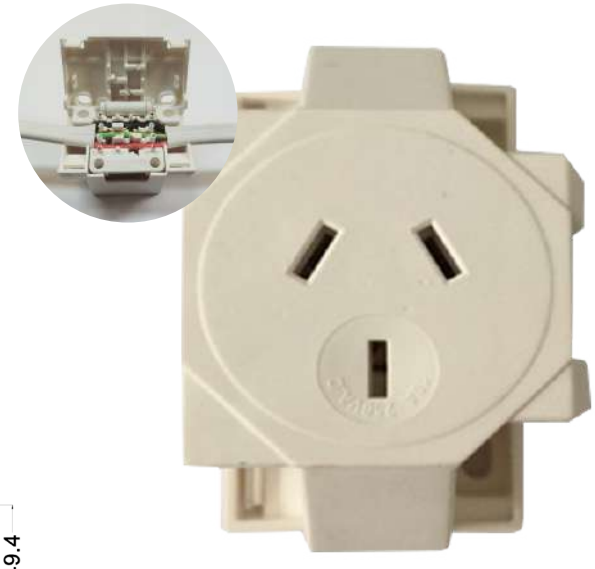


SOCK2

Part No.	Description	Carton QTY
SOCK2	SOCKET Quick Connect Single Surface 3 Pin PLUG BASE 10 Amp Earthed	1/10/200

- 3-Pin rear connecting single surface socket
- 240V/50Hz
- Material: PC
- 10Amp current rating
- Recommended cable: 1.0mm to 2.5mm
- Product is earthed
- Side entry for cable
- Polarity sensitive
- Box QTY of 10pcs only

1YEAR Replacement Warranty







SOCK3

Part No.	Description	Carton QTY
SOCK3	SOCKET Quick Connect Single Surface 3 Pin PLUG BASE 10 Amp Earthed	1/10/200

- Waterproof surface sockets
- Rated voltage: 250V
- Rated current: 10A
- Inside Mech: PA66
- Outer shell: Polycarbonate
- Earthed
- For residential or general use
- IP53 rated weatherproof
- Dustproof, anti-chemical corrosion, anti-ultraviolet, anti-impact, anti-aging, anti-aging oil, anti-splash
- Can be used in gardens, outdoor areas, swimming pools or tennis courts, etc
- Numerous conduit entries
- On/off slide switch

IP53 Rated | **1 YEAR Replacement Warranty**







GPO01



GPO02

Part No.	Description	Carton QTY
GPO01	SOCKET SINGLE GPO Weatherproof 250V 10A	1/40
GPO02	SOCKET DOUBLE GPO Weatherproof 250V 10A	1/40

Batten Fixture

Electrical Accessories

- 250V/50Hz
- Material: PC
- 10A current rating
- 4 terminals
- Lugs and screws included
- Box QTY of 10pcs only

1 YEAR Replacement Warranty





BATFIX01

Part No.	Description	Carton QTY
BATFIX01	BATTEN FIXTURE BC 10AMP 250V	10/100

Saddles Electrical Accessories





SADDLE001 & 002



SADDLE003 & 004




SADDLE007 & 008




SADDLE005 & 006

- Stainless steel / alloy steel saddles
- SADDLE001-004 material: stainless steel 304
- SADDLE005-008 material: alloy steel
- Box QTY 100pcs only (SADDLE002: 50pcs)


Part No.	Description	Carton QTY
SADDLE001	SADDLE Half STAINLESS STEEL 20mm 6.6mm hole	100/1K
SADDLE002	SADDLE HALF STAINLESS STEEL 25mm 6.5mm hole	50/400
SADDLE003	SADDLE FULL STAINLESS STEEL 20mm 5.6mm hole	100/1K
SADDLE004	SADDLE FULL STAINLESS STEEL 25mm 5.6mm hole	100/1K
SADDLE005	SADDLE HALF ALLOY STEEL 20mm 6.6mm hole	100/1K
SADDLE006	SADDLE HALF ALLOY STEEL 25mm 5.6mm hole	100/1K
SADDLE007	SADDLE FULL ALLOY STEEL 20mm 5.6mm hole	100/1K
SADDLE008	SADDLE FULL ALLOY STEEL 25mm 5.6mm hole	100/1K




SADDLE001




SADDLE002




SADDLE003




SADDLE004




SADDLE005



SADDLE006



SADDLE007



SADDLE008

Flex & Plug Electrical Accessories

- From plug to switch1.8m
- From switch to connection 106cm

1YEAR Replacement Warranty



FP2WSB

FP2WSW

Part No.	Description	Carton QTY
FP2WSB	FLEX & PLUG 240V POWER CORD with inline switch 2900MM BLK	1/100
FP2WSW	FLEX & PLUG 240V POWER CORD with inline switch 2900MM WH	1/100

1YEAR Replacement Warranty



FP2M/3M3WWH

Part No.	Description	Carton QTY
FP1.2M2W	FLEX & PLUG 240V (for 12V) (1200mm) 2 WIRE	1/100
FP2M2W	FLEX & PLUG 240V (for 12V) (2000mm) 2 WIRE	1/50
FP2M3W	FLEX & PLUG 240V (2000mm) 3 WIRE	1/50
FP2M2WWH	FLEX & PLUG 240V (for 12V) (2000mm) 2 WIRE (WHITE)	1/1
FP3M2WWH	FLEX & PLUG 240V (for 12V) (3000mm) 2 WIRE (WHITE)	1/1
FP2M3WWH	FLEX & PLUG 240V (2000mm) 3 WIRE (WHITE)	1/1
FP3M3WWH	FLEX & PLUG 240V (3000mm) 3 WIRE (WHITE)	1/1

12V Lamp Holder Electrical Accessories

1YEAR Replacement Warranty



LH1.5M

Part No.	Description	Carton QTY
LH0.4M	LAMPHOLDER 12V 400mm (0.40m)	1/1000
LH1.5M	LAMPHOLDER 12V 1500mm (1.50m)	1/250

Plug Electrical Accessories

- Plugs and extension leads
- Low profile design
- Ideal for domestic use like homes or offices

1 YEAR Replacement Warranty



PLUG001



PLUG002

Part No.	Description	Carton QTY
PLUG001	PLUG TOP Rewirable 3 PIN 10A CLEAR (Male)	1/100
PLUG002	PLUG TOP Rewirable 3 PIN 10A CLEAR (Female)	1/100

Extension lead Electrical Accessories

- Cable Diameter for LEADW001-005: 3x1.0mm^2
- Cable Diameter for LEADB001-009: 3x1.5mm^2

1 YEAR Replacement Warranty



LEADB001-009



LEADW001-005

Part No.	Description	Carton QTY
LEADB001	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 1m	1/60
LEADB002	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 2m	1/50
LEADB003	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 3m	1/30
LEADB004	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 5m	1/20
LEADB005	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 10m	1/10
LEADB006	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 15m	1/8
LEADB007	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 20m	1/6
LEADB008	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 25m	1/6
LEADB009	EXTENSION LEAD Piggy Back Black 15A Flex / 10A Plug & Socket 30m	1/4
LEADW001	EXTENSION LEAD White 10A 2m	1/50
LEADW002	EXTENSION LEAD White 10A 3m	1/50
LEADW003	EXTENSION LEAD White 10A 5m	1/30
LEADW004	EXTENSION LEAD White 10A 7m	1/20
LEADW005	EXTENSION LEAD White 10A 10m	1/20

Power Boards Electrical Accessories

- Available in 4 power outlets and 6 outlets
- 1m white AC cord with insulated pins
- Overload protection with test button
- Low profile design
- Ideal for home or office use

1 YEAR Replacement Warranty



CLA4PB



CLA6PB

Part No.	Description	Carton QTY
CLA4PB	POWER BOARD 4 SOCKET 1000mm FP	1/48
CLA6PB	POWER BOARD 6 SOCKET 1000mm FP	1/48




ACCESSORIES | CONTROL GEAR

12V Waterproof LED Drivers Control Gear


- Input voltage: 170-265V 50/60Hz
- Output voltage: 12V DC
- Short Circuit, Overload and Thermal Protection
- Built in Active PFC Function
- Ambient Temperature: -30 to 50^{0}C
- Flex & Plug Included: 1.2m

IP67 Rated | **3YEAR Replacement Warranty**




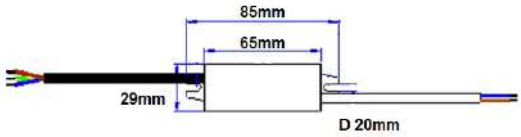


OTTER1




OTTER2

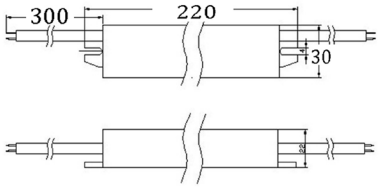


OTTER8

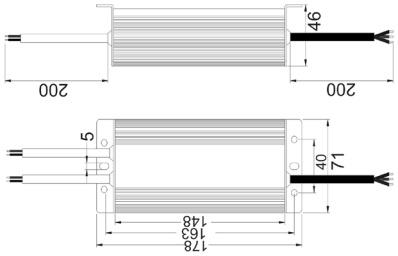

OTTER3-4

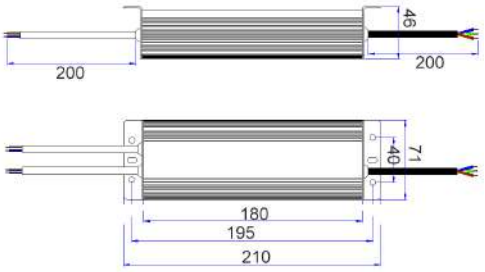

OTTER5

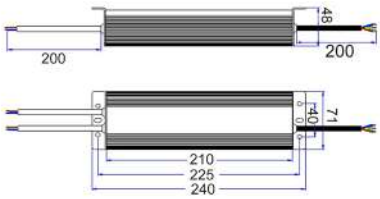

OTTER6



OTTER7

Part No.	Description	Watt	Current	Load	Min.Load Per Cable	Max.Load Per Cable	Dimensions	Carton QTY
OTTER1	DRIVER LED 12V DC	12W	0.15A	1.2-9.6W	1.2W	9.6W	65x29x20mm	1/25
OTTER2	DRIVER LED 12V DC	20W	1.67A	2-16W	2W	16W	132x30x20mm	1/25
OTTER8	DRIVER LED 12V DC	30W	2.5A	3-24W	3W	24W	182x30x20mm	1/25
OTTER3	DRIVER LED 12V DC	50W	4.17A	5-40W	5W	20W	178x71x46mm	1/10
OTTER4	DRIVER LED 12V DC	100W	8.3A	10-80W	10W	40W	178x71x46mm	1/10
OTTER5	DRIVER LED 12V DC	150W	12.5A	15-120W	15W	60W	210x71x46mm	1/10
OTTER6	DRIVER LED 12V DC	200W	16.7A	20-160W	20W	80W	240x71x48mm	1/10
OTTER7	DRIVER LED 12V DC	300W	25A	30-240W	30W	120W	275x95x50mm	1/5

For OTTER3, OTTER4, OTTER5, OTTER6 & OTTER7

These drivers are manufactured with a split cable format for carrying increased current for easier connection of multiple loads.

Each driver can be used:

- At full load capacity by connecting all cables to one terminal block
- With any combination of split cables (as long as the minimum and maximum loads below are adhered to)

FULL load capacity CANNOT be connected to one cable

24V Waterproof LED Drivers Control Gear

- Output voltage: 24V DC constant voltage
- Input voltage: 240V AC 50/60Hz
- Short circuit/ Overload/ Over temp protection
- 5% excess VA should be allowed

IP67 Rated | 2YEAR Replacement Warranty



OTTER24V1

Part No.	Description	Watt	Load	TA	TC	Length	Width	Depth	Carton QTY
OTTER24V1	DRIVER LED 24V DC C/VOLTAGE 12W	12W	1.2-9.6W	40⁰	80⁰	65mm	29mm	20mm	1/25
OTTER24V2	DRIVER LED 24V DC C/VOLTAGE 30W	30W	3-24W	40⁰	80⁰	166mm	30mm	20mm	1/25
OTTER24V3	DRIVER LED 24V DC C/VOLTAGE 100W	100W	10-80W	40⁰	80⁰	162mm	68mm	53mm	1/10
OTTER24V4	DRIVER LED 24V DC C/VOLTAGE 150W	150W	15-120W	40⁰	80⁰	215mm	68mm	53mm	1/10

12V Indoor LED Drivers Control Gear

- 12V DC constant voltage
- 1-12W output power
- Rated voltage: 240V AC 50/60Hz
- Ambient temperature: -10 to 40⁰C
- Short circuit protected
- Maximum distance to light source: 2m
- 5% excess VA should be allowed

IP20 Rated | 2YEAR Replacement Warranty



DRIV1

Part No.	Description	Watt	Load	Dimensions	Carton QTY
DRIV1	DRIVER LED 12V DC C/VOLTAGE 1-12W	12W	1.2-9.6W	Ø55x27mm	1/100

- 12V DC constant voltage
- 1-12W output power
- Rated voltage: 240V AC 50/60Hz
- 1Amp
- Short cut, overload, electric shock, thermal and main voltage spike protected
- Maximum distance to light source: 2m
- 20% excess VA should be allowed
- Flex & plug: 1.2m

30,000hr Lifetime | IP20 Rated | 3YEAR Replacement Warranty



CLADR12WFP

Part No.	Description	Watt	Load	TA	TC	Dimensions	Carton QTY
CLADR12WFP	DRIVER LED 12V DC C/VOLTAGE 1-12W	12W	1.2-9.6W	50⁰C	75⁰C	42x116x27mm	1/50

Waterproof Electronic Transformer Control Gear

- IP65 waterproof casing
- Suitable for 12V globes
- Dimmable with leading & trailing edge control gear
- Suitable for outdoor and in ground
- Compatible with C-Bus systems
- Australian Standards Approved
- Soft start to increase globe life by 50%
- Maximum distance to light source: 2m

IP65 Rated | 5 YEAR Replacement Warranty



ETH50.302VA

Part No.	Description	Load	Dimensions	Carton QTY
ETH50.302VA	TRANSFORMER 12V AC Electronic 10-50VA IP65 W/PROOF BLK RND	10-50W	Ø47x29mm	1/100



ACCESSORIES | TEAM BRAND PRODUCTS

Tyre Pump Team Brand Products

Part No: TP001

- Tyre pump
- Inflates 205/65R15 tyre to 40psi in 15min
- Quality screw on valve fitting
- Zip carry bag
- 2x ball and camping adaptors
- LED light and ON/OFF switch
- 110mm hose, 500mm cable
- 12V DC input
- Dimensions: 105mm x 95mm x 45mm
- Current draw: 2.5A to 6A

1 YEAR Replacement Warranty



TP001

Smart Jump Start Charger Team Brand Products

Part No: SJS1200

- Smart jump start charger - Will jump start MOST vehicles up to 2.8L(2800cc) diesel or up to 6.0L(6000cc) petrol 12,000mAh (44.4Whr) Lithium polymer battery cell
- Size: L 165 x W 75 x H 35mm (Power Pack only)
- Weight: 415g (Power Pack only)
- Battery: 12V Lithium Polymer 12,000mAh (45 Whr) 3S
- Max.Current: 1200A Absolute. 500A PEAK at clamps 200A START at clamps
- Output: Jump Port 2V DC
- Device powering 12V DC up to 180W. Use SSCFCL156 Adapter (Sold separately)
- Digital Charging Ports: USB x3 / 5V 2.1A x2 / 5V 1A x1
- Battery Chargers: AS approved 240V AC/15V 1A DC. 12V DC/15V DC 1A Car Charger
- Recharge Time: 4 hrs from flat with 240V charger, 8hrs with Car charger
- Charge Indicator: Backlit LCD Display screen
- Self Discharge Rate: approx. 0.2V per month depending on ambient storage temperature
- Protection & Safety: Reverse Current , Reverse Polarity, Short Circuit, Overtemp, Overcranking, Surge, Voltage Differential, Overload Reset, Over Charge, Over Discharge
- LED Flashlight: 3 Modes (Full, S.O.S, Emergency Flash)
- Operating temperature: -20 to 60^{0}C

1 YEAR Replacement Warranty



SJS1200

Zip carry case contents:

- 12V 12,000mAh (44.4Whr) Lipo Power Pack
- Insulated Jump Start Safe Jumper Leads
- 240V AC/15V DC 1A Wall Charger
- 12V DC/15V DC 1A car charger
- USB 5V 2 in 1 Adaptor cable
- User manual and Instruction cards

Zip carry case contents:

- 12V 16,000mAh (60Whr) Lithium Polymer Power Pack
- Insulated Jump Start Safe Jumper Leads
- 240V AC/15V DC 1A Wall Charger
- 12V DC/15V DC 1A car charger
- USB 2 in 1 Adaptor cable
- User manual and Instruction cards



SJS1500

Zip carry case contents:

- 12V 16,000mAh (60Whr) Lithium Polymer Power Pack
- Insulated Jump Start Safe Jumper Leads
- 240V AC/15V DC 1A Wall Charger
- 12V DC/15V DC 1A car charger
- USB 2 in 1 Adaptor cable
- User manual and Instruction cards
- Tyre pump included



SJS1500TP

Part No: SJS1500 & SJS1500TP

- Smart jump start charger - Will jump start MOST vehicles up to 4.2L(4200cc) diesel or up to 7.0L(7000cc) petrol 16,000mAh (60Whr) Lithium polymer battery cell
- Size: L 185 x W 85 x H 38mm (Power Pack only)
- Weight: 550g (Power Pack only)
- Battery: 12V Lithium Polymer 16,000mAh (60 Whr) 3S
- Max.Current: 1500A Absolute. 600A PEAK at clamps 300A START at clamps
- Output: Jump Port 2V DC
- Device powering 12V DC up to 180watts. Use SSCFCL156 Adapter (Sold separately)
- Digital Charging Ports: USB x2 / 5V 2.1A x1 / 5V 1A x1
- Battery Chargers: AS approved 240V AC/15V 1A DC. 12V DC/15V DC 1A Car Charger
- Recharge Time: 4 hrs from flat with 240V charger, 8hrs with Car charger
- Charge Indicator: Backlit LCD Display screen
- Self Discharge Rate: approx. 0.2V per month depending on ambient storage temperature
- Protection & Safety: Reverse Current, Reverse Polarity, Short Circuit, Overtemp, Overcranking, Surge, Voltage Differential, Overload Reset, Over Charge, Over Discharge
- LED Flashlight: 3 Modes (Full, S.O.S, Emergency Flash)
- Operating temperature: -20 to 60^{0}C
- SJS1500TP: Tyre pump included

1 YEAR Replacement Warranty

Smart Jump Starters Pty Ltd



SJS3000

Zip carry case contents:

- SAA Approved 240V AC / 15V DC 2A Battery Charger
- 12V DC / 15V DC 1A Car Cigarette Lighter Charger
- Heavy Duty Jumper Leads
- EC8 to EC5 Cable Adaptor
- USB 5V 2 in 1 Adaptor Cable
- Multi Volt Digital Charging Cable and 8 Adaptors
- LED flashlight with 3 modes (ON or SOS or EMERGENCY FLASH)
- Backlit LCD Display Screen
- Ultra slim zip carry bag (365x265x70mm Complete Kit Weight 2.3kg)

Part No: SJS3000

- Smart jump start charger - Will jump start MOST vehicles up to 7.0L (7000cc) diesel or up to 10.0L (10000cc) petrol
- Battery: 12V Lithium Polymer 32,000mAh (118.4hr) 6S 2P 3.7v per cell
- Max. Current: 3000A Absolute / 1200A Peak at clamps / 800A START at clamp
- Output: 12V DC
- Protection for: Over discharge Protection/ Reverse Current/ Reverse Polarity/ Short circuit/ Overtemp/ Over cranking/ Surge/ Voltage Differential/ Overload Reset/ Over Charge/ Over Discharge
- Charge Time of Power Pack from flat: 4 hours for 240V Wall charger or 8 hours from Car Charger
- Suitable to Emergency Jump Start Vehicles max 7L (7000cc) Diesel or max 10L (10,000CC) Petrol Engines
- Suitable to charge 12V 2.5A / 16V 3.5A or 19V 3.5A Digital Devices
- Suitable to charge 12V DC Devices max 180W 15A when used in conjunction with EC8 to EC5 Adapter and Female Cigarette Lighter Socket (SSFCL156 sold separately)
- Suitable for use with Tyre Pump (TP001 sold separately)
- Full Recharging recommended after each use and every 6-8 weeks
- Not to be stored in areas of excessive heat where ambient temperature is above 60^{0}C

1YEAR Replacement Warranty

Part No.	**JSSJL156**
Cable	8AWG 200^{0}C
Clamps	Insulated Copper
Forward Current	800A max.
Reverse Current	2A max. 18V max.
Battery Detection	Min.6V
Overheat Cut Out	60^{0}C
Cool Down	Approx.3 min
Reset	Manual button
Time Out	1 min to Red flashing LED



JSSJL156

Part No: JSSJL156

- **Smart jump start charger**
- STANDBY: SOLID RED LED Jumper Leads connected to Power Pack and in SHORT CIRCUIT protection mode
- BATTERY DETECTION: SOLID RED LED Jumper clamps connected to battery but vehicle battery has less than 6V. (no output) RECHARGE / REPLACE VEHICLE BATTERY
- CORRECT CONNECTION: SOLID GREEN LED Jumper clamps are connected correctly to the vehicle battery terminals. READY TO JUMP START (1min Time Out)
- INCORRECT CONNECTION: FAST RED FLASH LED Jumper leads are not connected to the vehicle battery terminals correctly (no output)
- OVER TEMPERATURE: SLOW GREEN FLASH LED Jumper leads are over heating from continuous cranking or over load. (no output) until leads cool down
- LOW VOLTAGE: FAST GREEN FLASH LED Power Pack voltage is too low for jump starting attempt. Fully charge the Power Pack. (no output)
- VOLTAGE DIFFERENTIAL: ALTERNATE RED/ GREEN FLASH LED Vehicle Battery voltage is higher than Power Pack. (no output)
- REVERSE CURRENT: ALTERNATE RED/GREEN FLASH LED Vehicle engine has started and is running. (no output). Disconnect Power Pack from vehicle battery immediately.

LED Load Resistor Team Brand Products

eXelite

Part No: LEDRESIST

LED Load Resistors 12V 25W 60hm (2PK)

The use of LED tail light bulbs to substitute incandescent bulbs may cause LED bulbs to increase in frequency of flash of the turn indicator, when the turn signal is initiated. To rectify this, you need to mimic the incandescent bulbs current load features. Meeting this load requirement is as simple as attaching one load resistor to each of the lamps.



LEDRESIST

LED Auto Globes Team Brand Products



LEDB242

GLOBE LED Auto BAYONET 12V 4W BA9S 6000K (2 PACK)

Wattage	4W
Kelvin	6000K
Lumens	65LM
Warranty	2 Year



LEDB264

GLOBE LED Auto BAYONET 12-24V 21W BA15S 6000K (2 PACK)

Wattage	21W
Kelvin	6000K
Lumens	420LM
Warranty	2 Year



LEDB264FY

GLOBE LED Auto BAYONET 12V 21W BAU15S AMBER 6000K (2 PACK)

Wattage	21W
Kelvin	AMBER
Lumens	360LM
Warranty	2 Year



LEDB265

GLOBE LED Auto BAYONET 12-24V 21/4W BAY15D 6000K (2 PACK)

Wattage	21/5W
Kelvin	6000K
Lumens	380LM (High-beam); 200LM (Low-beam)
Warranty	2 Year



LEDB265D

GLOBE LED Auto BAYONET 12-24V 21/5W BAZ15D 6000K (2 PACK)

Wattage	21/4W
Kelvin	6000K
Lumens	380LM (High-beam); 200LM (Low-beam)
Warranty	2 Year



LEDF271

GLOBE LED Auto FESTOON 12V 10W SV8.5 T11 6000K 36MM (2 PACK)

Wattage	10W
Kelvin	6000K
Lumens	68LM
Warranty	2 Year



LEDF272A

GLOBE LED Auto FESTOON 12V 10W SV8.5 T11 6000K 36MM (2 PACK)

Wattage	10W
Kelvin	6000K
Lumens	68LM
Warranty	2 Year



LEDF274

GLOBE LED Auto FESTOON 12V 10W SV8.5 T11 6000K 36MM (2 PACK)

Wattage	10W
Kelvin	6000K
Lumens	90LM
Warranty	2 Year



LEDW252

GLOBE LED Auto WEDGE 12V W5W T10 6000K (2 PACK)

Wattage	5W
Kelvin	6000K
Lumens	65LM
Warranty	2 Year



LEDW920

GLOBE LED Auto WEDGE 12V W5W T20 6000K (2 PACK)

Wattage	21W
Kelvin	6000K
Lumens	420LM
Warranty	2 Year



LEDW920A

GLOBE LED Auto WEDGE 12-24V 21W T20 6000K AMBER (2 PACK)

Wattage	21W
Kelvin	AMBER
Lumens	360LM
Warranty	2 Year



LEDW921

GLOBE LED Auto WEDGE 12-24V 21W T20 6000K AMBER (2 PACK)

Wattage	16W
Kelvin	6000K
Lumens	350LM
Warranty	2 Year



LEDW922

GLOBE LED Auto WEDGE 12-24V 21W T20 6000K AMBER (2 PACK)

Wattage	21/5W
Kelvin	6000K
Lumens	380LM (high-beam); 200LM (low-beam)
Warranty	2 Year



LEDW3157

GLOBE LED Auto WEDGE 12-24V 21/5W T20 6000K (2 PACK)

Wattage	21/5W
Kelvin	6000K
Lumens	380LM (high-beam); 200LM (low-beam)
Warranty	2 Year





EXECH4(H4), EXECH7(H7), EXEC9012(9012)

EXECHU1(H8, H9, H11, H16), EXECHU2(9005, 9006)

GLOBE LED Auto Easy Connect 9-24V AC 25W (2 PACK)

Wattage	25W
Kelvin	6500K
Lumens	5000LM
Warranty	2 Year

Multipurpose Microfibre Rags Team Brand Products

Part No: GRABARAG

- **Multipurpose microfibre automotive cleaning rags**
- Portable pop-up dispenser containing 50 rags, for grab and go cleaning
- New edgeless technology finish: No scratches
- Use wet or dry, with or without chemicals
- Water absorbent 8-9 times its weight
- Pull-use-reuse



GRABARAG
(50 PACK)

Part No: MINIGRAB

The Perfect cloth for lint free cleaning. These Industrial strength microfibre rags are washable and re-useable. Ideas for use include: interior dusting, exterior cleaning, windows and mirrors.

- Made with super absorbent terry microfibre that traps dirt and grime. Wipes down surfaces 99.9% without chemicals
- Water absorbent 8-9 times of its weight
- Machine washable on low with mild detergent. Avoid chlorine bleach or fabric softener. Tumble dry on low
- Composition: 87% polyester, 13% polyamide
- New edgeless technology finish: Gentle on surface, no scratches
- Use these rags wet or dry, with or without chemicals
- Pull-use-reuse
- Rag size: 30x23cm



MINIGRAB
(15 PACK)



Edgeless technology: Gentle on surfaces

Effective & tough on grime

Machine washable, tumble dry on low

Water absorbent 8-9 times of its weight

TEAM BRAND PRODUCTS

Synthetic Chamois Cloth Team Brand Products

Part No: BARRY & BIG FELLA

- **Synthetic chamois cloth**
- Made in UK
- The very effective and satisfying, first-class quality, perforated synthetic chamois cloth.
- BIG FELLA: 60x50cm; BARRY: 40x45cm
- Wash before first use and wring out excess water
- Begin with drying all windows, followed by other areas of the car. If the chamois is dropped, rinse carefully to remove any impurities
- After each use, rinse chamois with clean water (by hand or machine, without any bleach) to remove dirt particles. Rinse again in clean water and then allow to dry (Machine washable at 95^{0}C)
- Chamois remains soft when dry

Directions of Use:

- Wash before first use and wring out excess water
- Begin with drying all windows, followed by other areas of the car. If the chamois is dropped, rinse carefully to remove any impurities
- After each use, rinse chamois with clean water (by hand or machine, without any bleach) to remove dirt particles. Rinse again in clean water and then allow to dry (Machine washable at 95^{0}C)
- Chamois remains soft when dry



BIG FELLA (60x50cm)
BARRY (40x45cm)

Comprised of the finest material, allowing for outstanding absorbency and a supreme level of resilience, drying your vehicle with a streak free clean finish, in showroom condition!

Drying Towel Team Brand Products

Part No: FLUFFY

- **The magnificent automotive drying towel**
- COOPER KLEEN'S very effective, luxurious, soft and absorbent drying towel that leaves your vehicle gleaming!
- 40cm x 70cm
- Fabric density: 1000 GSM
- A splendid blend of 30% polyamide and 70% polyester
- Machine washable in cold or warm water only
- Soft and durable, scratch free edging
- Please note the actual item is yellow on both sides

Directions of Use:

After washing the vehicle, use the Cooper Kleen Drying Towel, starting with drying car windows followed by paintwork on the body of the car (top to bottom). Wring out excess water as necessary to prevent any smearing. Regularly check the towel for any dirt particles that may attach while drying to prevent possible micro-scratching.





FLUFFY

DIY Headlight Restoration Kit Team Brand Products

Part No: HEADLIGHTRESTKIT

- **DIY headlight restoration kit**
- Cooper Kleen DIY Headlight Restoration Kit is designed to eliminate the worst cases of headlight degradation, yellowing, oxidation and scratches from your headlights. The kit includes everything needed to restore the cloudiest lenses and can be used without any special tools. Get great results on most plastic lenses, such as tail lights, trailers, boat windows, helmet visors, motorcycle windscreens, snowmobiles and more.
- No special tools required
- Clears headlights lens from haze and contamination
- Quick and easy 3-step process

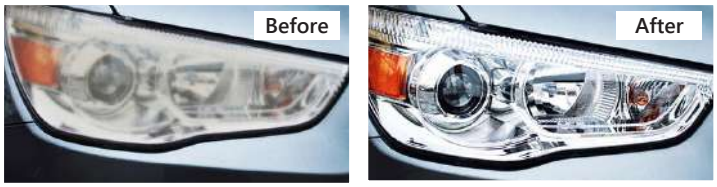

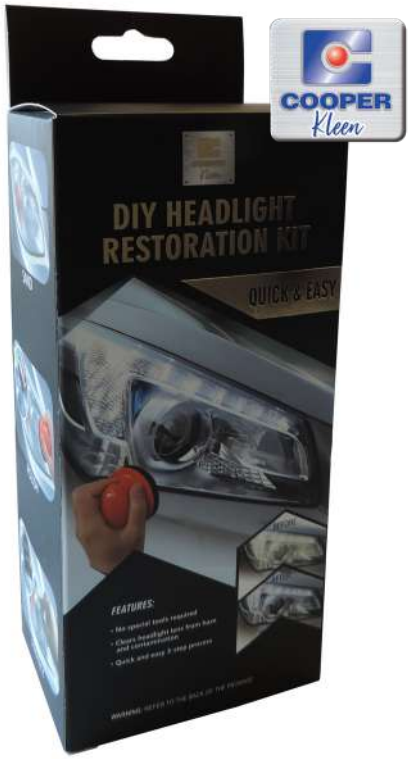

HEADLIGHTRESTKIT


What's included:

- P800 Sanding Disc (2)
- P1200 Sanding Disc (2)
- P2000 Sanding Disc (2)
- UV Protection Liquid 3ml (2)
- Hand Buff Tool (1)
- Wool Polish Disc (1)
- Polish Paste 85gm (1)
- White Sponge Disc (1)
- Masking Tape (1)
- Instruction Manual (1)

DIY Window Repair Kit Team Brand Products

Part No: WINDSCREENREPKIT

- **DIY windscreen repair kit**
- Cooper Kleen Windscreen Repair Kit is a handy tool designed to make repairing small chips and cracks in your windscreen a breeze in just 30 to 50 minutes. This kit will minimise the appearance of chips and cracks in your windscreen and prevent them from spreading any further. It works by removing air from the break and then fills it with a durable resin, making the area even stronger than before. To achieve the best results, repairs should be done as soon as the damage has occurred and before the break is contaminated by dirt or water.

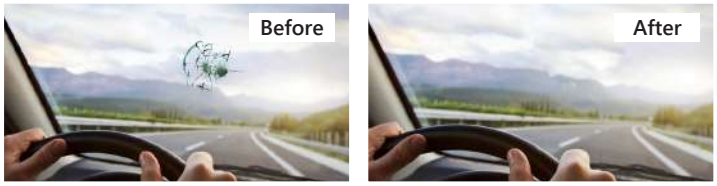



WINDSCREENREPKIT

What's included

- Repair Resin (1)
- Pedestal (1)
- Razor Blade (1)
- Cleaning Cloth (1)
- Black O-ring (3)
- Rubber tube (1)
- Adhesive Seal (3)
- Curing Film (5)
- Injector with Spring Clip (1)
- Push Pin (1)
- Reflector (1)
- Instruction Manual (1)

Head Lamp Torch Team Brand Products

Part No: EXDUOHEADLAMP

- 3.7V rechargeable battery, 1200mAh
- LED: 3W COB LED, 2W spot SMD LED
- 400 Lumen flood beam, 250 Lumen spot beam
- Functions: spot beam (250LM) / flood beam 25% (100LM) / flood beam 50% (200LM) / flood beam 100% (400LM)
- Kelvin: 6500K
- Usage period: approx 3hrs to 10hrs
- Charging period: approx 4hrs
- IP65 water resistant
- IK07 shock resistant
- **Wireless charging pad available**

(EXCHARGINGPAD sold separately)

Box Includes:

- Duo headlamp
- USB-C 1m cable

IP65 Rated | IK07 Rated | 1 YEAR Replacement Warranty



EXCHARGINGPAD



EXDUOHEADLAMP

Part No: SENSORHEADLIGHT

- Ultra bright 5W COB LED headlamp (350LM)
- Brightness control-3 settings: 50%, 100% & S.O.S.
- Smart on/off handwave sensor
- 45^0 tilt light for flexible light positioning
- Ultra lightweight design
- Adjustable headband with non-slip grip
- Rechargeable
- Battery level and charge indicator
- Micro USB charging system
- Battery: 3.7v 1400mAH Polymer Li-ion
- Operating time: 3-20 Hours
- USB charging cord included

IP65 Rated | IK08 Rated | 1 YEAR Replacement Warranty



SENSORHEADLIGHT

Handwave Sense On/ Off

- Easily turn the headlamp on and off by simply swiping your hand in front of the motion sensor.
- This allows you to quickly turn on the light when you need it and off when you don't.





45^0 ADJUSTABLE ANGLE

The light source can be adjusted between 0-45^0 to meet various conditions of use

Part No: LIGHTHOUSE

- Powerful performance rechargeable LED head lamp
- Super bright Cree P50 LED
- Function: Full beam/ Low beam/ Flash
- Wattage: 15W; Lumen: 1000lm
- Telescopic zoom design with a focusing range up to 500m
- Battery level indicator
- Built-in rapid cooling device
- Double aluminium alloy body provides optimal heat dissipation to prevent overheating
- Adjustable angle lighting: 90^0
- Working time: up to 4 hours
- Micro USB rechargeable
- Micro USB charger cable included
- Batteries: 3x18650 Lithium batteries (total 6000mAh)
- Charging time: 4-5 hours
- Weight: 239g

1 YEAR Replacement Warranty



LIGHTHOUSE

Work Flood Light Team Brand Products

Part No: EXMINIFLOOD

- 3.7V 250mmAh Li-ion
- LED: 10W COB LED / 3W LED torch
- 1000 Lumen COB LED / 300 Lumen SMD LED
- Usage period: 3hrs to 12hrs for COB LED / 10hrs for SMD LED
- Functions: COB LED / SMD LED 25% / SMD LED 50% / SMD LED 100%
- Charging period: approx. 3.5hrs
- **Wireless charging pad available (EXCHARGINGPAD sold separately)**

Box Includes:

- Mini flood lamp
- USB-C 1m cable

IP65 Rated | IK08 Rated | 1 YEAR Replacement Warranty



EXMINIFLOOD



EXCHARGINGPAD



150° Rotating Stand



Strong Magnetic Base

TEAM BRAND PRODUCTS

Work Light / Torch Team Brand Products

Part No: EX180ZOOMTORCH

- Ultri tough nylon, aluminium & TPR construction
- Two strong magnets at base
- IP54 dust & water resistant
- IK08 shock resistant
- **Wireless charging pad available (EXCHARGINGPAD sold separately)**

Specifications:

- Battery: 3.7V 2500mAh Li-ion
- LED: 10W high power LED
- 900 Lumen
- Usage period: 3hrs to 10hrs
- Functions: 100% / 50% / 25%
- Charge time: approx. 4.5hrs

Box Includes:

- 180^0 adjustable zoom torch
- USB-C 1m cable

IP54 Rated | IK08 Rated | 2 YEAR Replacement Warranty



EXCHARGINGPAD





EX180ZOOMTORCH



Adjustable Beam



Strong Magnet At Base

Wireless Charging Pad Team Brand Products

Part No: EXCHARGINGPAD

- Compatible with charging some mobile phones
- IK08 shock resistance
- Mount via magnets or screws (screws are not included)

Specifications:

- Material: ultra tough rubber & nylon polymer
- Wireless output: 5V DC 1.5A Max
- USB charger lead: USB-C x 1m
- Operating temperature: -5 to $+40^0$C
- Charging pad measurements: 165x110x29mm
- Net weight: 220g (not including box)
- Warranty: 1 year replacement warranty

Box Includes:

- 10W wireless charging pad
- 5V 2A charger
- USB-C 1m cable

IK08 Rated | 1 YEAR Replacement Warranty



EXCHARGINGPAD



Wireless Charging Charger + Magnet



Smartphone Holder



Mounting Options include Using Magnets or Securing with Screws

Work Light / Torch Team Brand Products


Part No: PENLIGHT

- Spotlight & Floodlight with A Magnetic Clip
- Beam distance: 45m(SMD LED) / 13m(COB low) / 22m(turbo)
- Type of LED: COB+SMD LED
- Battery / voltage: 1x10580 / 3.7V 500mAh
- Operating time: 5hrs(SMD LED/COB low) / 1.5hrs(COB high)
- Charging time: 3hrs
- Lumen on low beam: 90Lm(SMD LED) / 100Lm(COB low)
- Lumen on high beam: 250Lm(COB high)
- Colour temperature: 6500K
- Functions: SMD LED on / COB low / COB high / Off / hold for dimming
- Body material: Aluminium
- Magnet: N35
- 4pcs merchandise box also available

2YEAR Replacement Warranty



PENLIGHT



Spotlight



Rotating Magnetic Clip

Part No: TWISTTORCH

- Powerful Worklight / Torch with Adjustable Head
- Beam distance: 80m(low) / 140m(high) / 200m(turbo)
- Type of LED: SMD3535
- Battery / voltage: 1*18650 / 3.7V 2200mAh
- Operating time: 6.5hrs(low) / 4hrs(high) / 30s(turbo)
- Charging time: 4hrs
- Lumen on low beam: 200Lm
- Lumen on high beam: 500Lm(high) / 1000Lm(turbo)
- Colour temperature: 6500K
- Functions: high-low-off-hold: turbo
- Battery indicator: green-battery full / red-power weak
- Body material: Aluminium
- Magnet: N35
- 4pcs merchandise box also available

2YEAR Replacement Warranty



TWISTTORCH

90° Twist Control



Adjustable beam direction

Magnet Base



Strong magnet at the bottom



Part No: LITTLEKRAKKA

- 12V emergency torch & work light
- Charged by cigarette lighter plug
- USB car charger adapter
- Charging voltage: 12V
- Output voltage: 5V, 2Amps
- LED chips: XPG (Torch) + COB (Work Light)
- 300 lumen (Torch); 200 lumen (Work light)
- 90^0 swivel head
- Torch function: Strong light, Low light, Flash light
- Work light function: Strong light
- Battery: 14500 battery, 800mAh
- Working time: up to 2.5 hours
- Include strong magnet on body
- Built in safety hammer
- 5pcs merchandise box also available

1YEAR Replacement Warranty



LITTLEKRAKKA

Part No: EXELRIPPA

- LED slim folding rechargeable work light
- LED chips: COB LED + 1PC LED
- 1 x 16340 Lithium Battery, 600mAh
- Maximum output 240 lumen
- Impact resistant 1m
- USB rechargeable
- Pocket clip
- Strong magnet at the bottom
- FUNCTION options: High light/ Low light/ Torch/ Red light/ Red flash
- Product Size: 9.5 x 3.7 x 2.6cm
- Package Weight: 77g
- COB angle adjustable
- 5pcs merchandise box also available

2YEAR Replacement Warranty



EXELRIPPA



Slim light rotates 360^0 and swivels 180^0 for adjustable illumination at any angle



USB Charge



Folds for Compact Storage

TEAM BRAND PRODUCTS

Part No: FLATLIGHT

- **Rechargeable Worklight with Strong Magnetic Back**
- **Super thin at only 10.5mm**
- Beam distance: 15m (low) / 25m (high)
- Type of LED: COB
- Rechargeable Battery / voltage: 1x802380 / 3.7V 1800mAh
- Operating time: 8hrs (low) / 3.5hrs (high)
- Charging time: 4hrs
- Lumen on low beam: 180Lm
- Lumen on high beam: 360Lm
- Colour temperature: 6500K
- Functions: high-low-flash-off-hold for dimming
- Body material: Aluminium
- Magnet: N35

2YEAR Replacement Warranty



FLATLIGHT

Part No: GRAB-AND-GO

- Rechargeable worklight & torch
- 2 heavy duty magnets
- Swivel hook
- Kelvin: 6500K, Lumen output: 1200LM
- 15W COB LED
- 3.7V, 5000mAh
- Inspection sequence: 10% /50% /100% /Torch off
- SAA USB charger
- USB charging cable
- 90^0 angle magnet
- Material: aluminium + Polycarbonate + TPE
- Charging time: Lamp-5hrs; Base-7.5hrs
- Worktime: 3.5hrs (full beam)
- Battery Status indicator
- Charging stand including

IP54 Rated | IK07 Rated | 1YEAR Replacement Warranty



GRAB-AND-GO

Part No: LED65WKL

- Rechargeable 6+5 LED angle work light & torch
- Re-chargeable Lithium battery, 3.7V 2200mAh
- 0.3W LED + 6 x 0.5W SMD LED
- Equivalent to approximately 300 lumen
- Operating temperature: -5 to 45^0C
- Working time after full charge: Approximately 3.5hr
- Charging time: Approximately 5hr
- The ambient temperature will affect the time of charging and discharging
- AC adapter: 100V-240V input, 5V 1000mA output
- Strong magnetic, adjustable angle work light

1YEAR Replacement Warranty



LED65WKL

Part No: BIG SLIM

- LED COB slim worklight & torch
- Dimmable 20-100%
- Rechargeable
- Super strong 360⁰ swivel magnet base & hook
- Robust slim light
- Kelvin: 6500K
- IP67: Dust & water resistant up to 1 meter in depth protection
- IK08: Impact resistant

IP67 Rated | IK08 Rated | 2 YEAR Replacement Warranty



BIG SLIM

Worklight (Main COB Light):

- Ultra bright 10W COB LED
- Max.lumen: 800lm

Torch Light:

- 3W LED
- Max.lumen: 200lm

Package Includes:


- 110-240V SAA AC charger
- USB charging cable
- USB car charger

Work Time:

- Using maximum lumen: 2.5 hours
- Using minimum lumen: 20 hours

Battery:

- 3.7V 2500mAh/Li-ion Rechargeable battery
- Charging time: Approx 5 hours
- Charge the battery completely and perform to zero when using for the first time. Then fully charge again. During charging, the indicator light will flash. After charging is complete, it will stop flashing and indicator lights will be on.

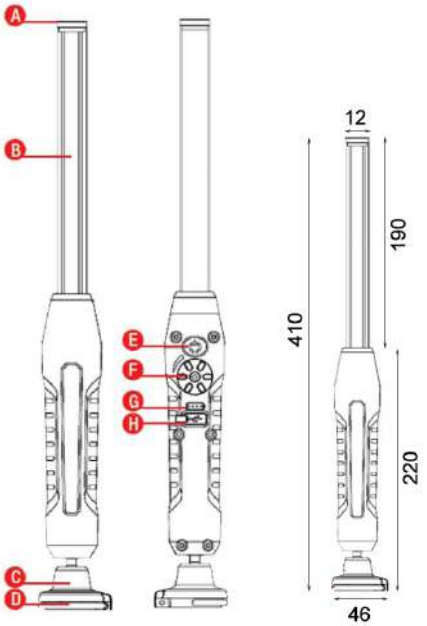





A. TORCH LIGHT
B. MAIN COB LIGHT
C. 360⁰ SWIVEL MAGNET BASE
D. STRONG SWIVEL HOOK
E. ON/OFF SWITCH
F. DIMMING DIAL
G. LED LAMP BATTERY INDICATOR
H. MICRO USB CHARGING INPUT

Part No: SLIM BENDY

- 360⁰ Rotational
- Slim and Bendy
- Dimmable (100%-10%)
- Rechargeable
- Strong Magnet at Base
- Metal hook to hang
- 5W COB LED
- Kelvin: 6500K; Lumen: 500LM
- CRI: >80
- Charging time: approximately 5 hours
- Operating time: Min: 2.45hrs on full beam; Max: 20hrs on low beam
- Torch LED on top: 2W 140LM
- Battery: 3.7V, 2500mAh Li-ion rechargeable battery

IK08 Rated | 2YEAR Replacement Warranty



SLIM BENDY

Part No: ROCKY

- Heavy duty housing design/pro level
- Super strong base magnet with adjustable beam angle
- Battery capacity display
- Worklight: 1000 lumen (Dimmable)
- Torch: 200 lumen
- Charging time: Approximately 5.5 hours
- Operating time:
  Worklight Min: 2.5hrs on 100% lumen
  Worklight Max: 20hrs on 10% lumen
  Torch: 12hrs
- Battery: 3.7V, 4400mAh Li-ion rechargeable battery

IP65 Rated | IK08 Rated | 2YEAR Replacement Warranty

Worklight:

10W 6500K 1000LM
LED chip: COB
CRI: >80
Dimming range: 100%-10%

Torch:

3W LED 6500K 200LM
CRI: >80

Box Includes:

110V-240V SAA AC charger
USB charging cable
USB car charger



ROCKY



Part No: LED41WKL

- Rechargeable 4+1 LED angle work light & torch
- Re-chargeable Lithium battery
- Will run for approx. 3 hours after a full charge
- Charging time approx. 5.5 hours

1 YEAR Replacement Warranty



LED41WKL

Part No: TOE2530PRO

- Rechargeable LED work light
- Cordless rechargeable
- 30pcs long life LED chips
- Colour temp: 6400K, lumens: 200lm
- Length: 350mm
- LED chips: 20,000 MCD
- 5 hours use and 5 hours charge time
- Water, oil and shock resistant IP54
- Switch on handle, swivel hanging hook
- 240V charger included
- Lamp will not operate whilst on charge
- Australian Standards Approved

50,000hr Lifetime | IP54 Rated | 1 YEAR Replacement Warranty



TOE2530PRO

Part No: EX-288

- LED multi voltage 288pcs LED chips tube light
- 288pcs LED chips
- Wattage: 20W
- 1500 lumens watt efficiency
- Low power consumption 1.5Amp current draw 12V DC
- Includes 6.8m double insulated cable with IP65 joiner plug for 12V to 24V DC use (complete with cigarette plug socket and battery clamp adapter) and SAA approved driver for 240V AC use
- Smart boost design allows for full light output even on a less than fully charged battery to 9V
- 1.2m input cable with waterproof IP65 on/off switch
- Adjustable velcro straps and plastic coated hanging hooks
- Suitable for use in workshops, camping, automobile, outdoors

1 YEAR Replacement Warranty



EX-288

Part No: EX-108



EX-108

- LED 108pcs 3528 LED tube light
- Wattage: 10W; Kelvin: 6700K; Lumens: 800LM
- Input voltage: 110-240V
- CRI: 80
- Twice as bright as similar 11W fluorescent
- Australian Standards Approved wall plug 240V AC driver
- Solid state lighting technology makes for much improved vibration and impact protection over fluorescent work light
- Upgraded plastic coated steel swivel hanging hook with anti-roll handle and 180 degree light beam
- IP54 water and oil resistant
- On/off switch on handle, flex & plug: 8m



Electrical Terminology

WHAT IS A KELVIN?

The kelvin is often used in the measure of the colour temperature of light sources.

Colour temperature is a characteristic of visible light that has important applications in lighting, photography, publishing, manufacturing, and other fields. The colour temperature of a light source is the temperature of an ideal black-body radiator that radiates light of comparable hue to that of the light source. Colour temperature is conventionally stated in the unit of absolute temperature, the kelvin, having the unit symbol K. Colour temperatures around 6500k are called daylight (stark white) and those around 5000k are called cool colours (natural white), while lower colour temperatures (2700-3000K) are called warm colours (warm yellow).

Deciding what kelvin to use in your home or office can be a personal choice. Most people prefer day light colours in kitchens and office work areas as this gives the appearance of a brighter white. Many people like to add warmth to their living areas by using a warmer colour. If your areas are separated, you can mix these colours. For those who are undecided, choosing a neutral (cool white colour) is the best option.

WHAT IS A LUMEN?

The lumen is the luminous flux, a measure of the power of light perceived by the human eye. Luminous flux differs from radiant flux in that luminous flux measurements (such as lumens) are intended to reflect the varying sensitivity of the human eye to different wavelengths of light, while radiant flux measurements (such as watts) indicate the total power of light emitted. The lumen is defined in relation to the candela as: 1 lm = 1 cd·sr.

The lumen can be thought of casually as a measure of the total "amount" of visible light in some defined beam or angle, or emitted from some source. The number of candelas or lumens from a source also depends on its spectrum, via the nominal response of the human eye as represented in the luminosity function.

The difference between the units lumen and lux is that the lux takes into account the area over which the luminous flux is spread. A flux of 1000 lumens, concentrated into an area of one square metre, lights up that square metre with an illuminance of 1000 lux. The same 1000 lumens, spread out over ten square metres, produces a dimmer illuminance of only 100 lux. Mathematically, 1 lx = 1 lm/m2.

A single fluorescent light fixture that produces a luminous flux of 12000 lumens might light a residential kitchen with an illuminance of 500 lux. Lighting a larger area to the same illuminance requires a proportionately greater number of lumens.

Lamps used for lighting are commonly labelled with their light output in lumens.

WHAT IS A LUX?

Not to be confused with a lumen, the lux is the unit of illuminance and luminous emittance measuring luminous power per area.

It is used in photometry as a measure of the intensity, as perceived by the human eye, of light that hits or passes through a surface. It is analogous to the radiometric unit watts per square metre, but with the power at each wavelength weighted according to the luminosity function, a standardized model of human visual brightness perception.

IP Rating

SOLIDS - FIRST DIGIT

The first digit indicates the level of protection that the enclosure provides against hazardous parts and the ingress of solid foreign objects

Level	Object Size Protected Against	Effective Against
0	--	No protection against contact and ingress of objects
1	>50mm	Any large surface of the body, such as the back of a hand, but no protection against deliberate contact with a body part
2	>12.5mm	Fingers or similar objects
3	>2.5mm	Tools, thick wires, etc.
4	>1mm	Most wires, screws, etc.
5	Dust Protected	Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment; complete protection against contact
6	Dust Tight	No ingress of dust; complete protection against contact

LIQUIDS - SECOND DIGIT

Protection of the equipment inside the enclosure against harmful ingress of water.

Level	Protected agianst	Testing for	Details
0	**Not protected**	--	--
1	**Dripping water**	Dripping water (vertically falling drops) shall have no harmful effect.	Test duration: 10 minutes Water equivalent to 3-5mm rainfall per minute
2	**Dripping water when tilted up to 15°**	Vertically dripping water shall have no harmful effect when the enclosure is tilted at an angle up to 15° from its normal position.	Test duration: 10 minutes Water equivalent to 3-5mm rainfall per minute
3	**Spraying water**	Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect.	Test duration: 5 minutes Water Volume: 0.7 litres per minute Pressure: 80-100kNm2
4	**Splashing water**	Water splashing against the enclosure from any direction shall have no harmful effect.	Test duration: 5 minutes Water Volume: 10 litres per minute Pressure: 80-100kNm2
5	**Water jets**	Water projected by a nozzle (6.3mm) against enclosure from any direction shall have no harmful effects.	Test duration: at least 3 minutes Water volume: 12.5 litres per minute Pressure: 30kN/m2 at distance of 3meters
6	**Powerful water jets**	Water projected in powerful jets (12.5mm nozzle) against the enclosure from any direction shall have no harmful effects.	Test duration: at least 3 minutes Water volume: 100 litres per minute Pressure: 100kN/m2 at distance of 3meters
7	**Immersion up to 1m**	Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1m of submersion)	Test duration: 30 minutes Immersion at depth of 1meter
8	**Immersion beyond 1m**	The equipment is suitable for continuous immersion in water under conditions which shall be specified by the manufacturer. Normally, this will mean that the equipment is hermetically sealed. However, with certain types of equipment, it can mean that water can enter but only in such a manner that produces no harmful effects.	

IK Rating

IK RATINGS

Degree of impact Protection EN62262.
IK rating system is an international classification showing degrees of protection provided by luminaires against external mechanical impacts.


Number	Measure of Protection -impact energy (joules)	Test
IK/00	No protection to this standard	
IK/01	0.15	0.20 kg impact
IK/02	0.20	0.20 kg impact
IK/03	0.35	0.2 kg impact
IK/04	0.50	0.20 kg impact
IK/05	0.70	0.20 kg impact
IK/06	1.00	0.50 kg impact from 200mm
IK/07	2.00	0.50 kg impact from 400mm
IK/08	5.00	1.70 kg impact from 295mm
IK/09	10.00	5.00 kg impact from 200mm
IK/10	20.00	5.00 kg impact from 400mm

***When higher impact energy protection is required 50 joules is recommended.**

CLA Description Abbreviations Index

ABBREVIATION	EXPLANATION
A/C	Alternating Current
ANOD	Anodised Aluminium
BC	Bayonette Cap Globe Base Type (B22)
BLK	Black
CAN	Globe shape - candle
CFL	Compact Fluorescent (inbuilt ballast)
CIRC	Circular
CLR	Clear
COB	Chip On Board
COM	Commercial Use
CONN	Connectable
COP	Copper
D	Degree (Beam angle of light distribution)
D/ADJ	Double Adjustable
D/L	Recessed downlight fitting
DC	Direct Current
DIMM	Dimmable with recommended control gear
DOM	Domestic use
ES	Edison Screw Globe Base Type (E27)
F&P	Flex & plug
FL	Fluorescent (External Ballast Required)
F/RND	Globe shape - Fancy Round
FR	Frosted
HAL	Halogen
H/HOOD	Heat Hood
LB	Long Body
LED	Dedicated light Emitting Diode
LGE	Large
M/Amp	Milliamp
M/BRACKET(S)	Mounting Bracket(s)

ABBREVIATION	EXPLANATION
MED	Medium
P/C	Polycarbonate
PA	Polyamide
PL	External Ballast required/1U
PLC	External Ballast required/2U
RECD	Recessed
RECT	Rectangular
REFL	Reflector
RGB	Red/Green/Blue(multi)
RND	Round
S/ADJ	Single Adjustable
S/C	Satin Chrome
S/M	Surface Mounted
S/N	Satin Nickel
SBC	Small Bayonette Cap (B15)
SES	Small Edison Screw (E14)
SIL	Silver
SMD	Surface Mounted Diode
SML	Small
SQ	Square
SS304	Stainless Steel 304 Grade
SS316	Stainless Steel 316 Grade
T/F	Transformer (electronic)
TRIPHOS	Triphosphorous
WH	White



Double insulation



Dimmable

IC (Insulation Contact) Rating for Downlights IC-F (Insulation Contact-Fire Resistant)

Type	Symbol	Abutted*	Normal use†—Covered	Use with insulation‡	Accessibility to high temperature parts§	Surface of luminaire normal operating temperature limit	Comments
Non-IC		No	No	No	Fully accessible	No limit on side or top surface of luminaire Mounting surface of luminaire limited to 90°C	Suitable for use in Australia and New Zealand—Intended for commercial industrial use only. Not for residential use. Not for use in residential dwellings or other places where building insulation may be installed (now or in the future). These luminaires have not been tested for use with building insulation.
Do-Not-Cover		No	No	Yes	Fully accessible	No limit on side or top surface of luminaire Mounting surface of luminaire limited to 90°C	Currently prohibited from installation in residential locations in New Zealand by AS/NZS 3000. Suitable for residential or commercial use in Australia. Cannot be covered. Manufacturer's stated clearance distances from sides of luminaire to insulation, and clearance above luminaire, will be in the installation instructions supplied with the luminaire, indicating clearances have to be observed at all times for correct installation. These luminaires have been tested to show that they are for use with building insulation present, observing manufacturer's stated installation clearance distances. They cannot be covered with building insulation, however, they have been tested to show that if inadvertently covered they should not become a fire hazard.

(*continued*)

http://www.china-gauges.com/

IC (Insulation Contact) Rating for Downlights IC-F (Insulation Contact-Fire Resistant)

Type	Symbol	Abutted*	Normal use†—Covered	Use with insulation‡	Accessibility to high temperature parts§	Surface of luminaire normal operating temperature limit	Comments
CA90		Yes	No	Yes	**Limited access** In this Standard, this is assessed for access to high temperature parts by use of a 5.6 mm probe to side and top of luminaire	90°C limit on side or top or mounting surface of luminaire	Suitable for residential or commercial use in Australia and New Zealand. Cannot be covered. Insulation can be placed against the sides of the luminaire. Manufacturer's stated clearance above the luminaire will be in the instructions provided with the luminaire, indicating clearance has to be observed for correct installation. These luminaires have been tested to show that they are for use with building insulation present and placed against the sides of the luminaire. They cannot be covered in building insulation, however, they have been tested to show that if inadvertently covered they should not become a fire hazard.
CA135		Yes	No	Yes	**Some access** In this Standard, this is assessed for access to high temperature parts by use of a 50 mm probe to side and top of luminaire	135°C limit on side or top surface of luminaire Mounting surface of luminaire limited to 90°C	Suitable for residential or commercial use in New Zealand only. Not permitted for use in Australia. Cannot be covered. Insulation can be placed against the sides of the luminaire. Manufacturer's stated clearance above the luminaire will be in the instructions provided with the luminaire, indicating clearance has to be observed for correct installation. Cannot be used where building materials or insulation is not rated for exposure to constant temperatures of 135°C (cannot have such building material or insulation touching the sides of the luminaire). These luminaires have been tested to show that they are for use with building insulation present and placed against the sides of the luminaire. They cannot be covered in building insulation, however, have been tested to show that if inadvertently covered they should not become a fire hazard.

(*continued*)

http://www.china-gauges.com/

IC (Insulation Contact) Rating for Downlights IC-F (Insulation Contact-Fire Resistant)

Type	Symbol	Abutted*	Normal use†—Covered	Use with insulation‡	Accessibility to high temperature parts§	Surface of luminaire normal operating temperature limit	Comments
IC		Yes	Yes	Yes	**Limited access** In this Standard, this is assessed for access to high temperature parts by use of a 5.6 mm probe to sides and top of luminaire.	90°C limit on side or top or mounting surface of luminaire	Suitable for residential or commercial use in Australia and New Zealand. Used where some air transfer is allowed or desired between living space and roof space (there will be some air transfer between the spaces if the luminaire is not fully covered in insulation). These luminaires have been tested to show they are suitable for normal use when covered in building insulation.
IC-4	IC-4	Yes	Yes	Yes	**Restricted access** In this Standard, this is assessed for access to high temperature parts by use of a IP4X—1 mm probe to sides, top and front face of luminaire.	90°C limit on side or top or mounting surface of luminaire	Suitable for residential or commercial use in Australia and New Zealand. Used where air transfer is not permitted or not desired between living space and roof space (there will be no air transfer between spaces even if there is no insulation covering the luminaire). Typical use is passive house design where no air transfer is allowed. These luminaires have been tested to show that they are suitable for normal use when covered in building insulation.

(*continued*)

http://www.china-gauges.com/

IC (Insulation Contact) Rating for Downlights IC-F (Insulation Contact-Fire Resistant)

Type	Symbol	Abutted*	Normal use†—Covered	Use with insulation‡	Accessibility to high temperature parts§	Surface of luminaire normal operating temperature limit	Comments
No Marking		No	No	No	No		Not verified as tested/compliant to Australian/New Zealand standards. Marking is required by standards—no marking indicates non-compliance. Installation instructions specifying any clearance distance is required by this Standard. Do not install any luminaire that does not have one of the marking symbols or instructions specifying any clearance distances. NOTE: For luminaires installed prior to the publication of this Standard (AS/NZS 60598.2.2:2016), which do not have marking and/or installation instructions with clearance distances specified, refer to AS/NZS 3000.

* May be abutted against normally flammable building elements or insulation.

† Intended and tested for use under building insulation as part of normal operation.

‡ May be used where building insulation may be installed (now or in the future).

§ Classification and probe to determine access of insulation etc., to high temperature parts.

http://www.china-gauges.com/

Index by Part Numbers

PART NO.	BARCODE	PAGE
2D28WGR8DL	9326191019814	480
3U001	9326191025938	471
3U002	9326191025945	471
3U003	9326191025952	471
A		
ABBEY1	9326191030093	114
ABBEY2	9326191030109	114
AKENTRI1	9326191038082	280
AKENTRI2	9326191038099	280
ALTA1	9326191023880	166
ALTA1W	9326191025372	221
ALTA2	9326191023897	166
ALTA2W	9326191025389	221
ALTA3	9326191023903	166
ALTA3W	9326191025396	221
AMUN1	9326191024740	359
AMUN2	9326191024757	359
AMUN3	9326191024764	359
AMUN4	9326191024771	359
APIS1A	9326191038655	285
APIS2A	9326191038662	285
ARMIS1	9326191027475	134
ARMIS2	9326191027482	134
ARMIS3	9326191027499	134
ARMIS4	9326191027505	134
ARMIS5	9326191027512	134
ARMIS6	9326191027529	134
ARMIS7	9326191027536	134
ARMIS8	9326191027543	134
ARMIS9	9326191027550	134
ATEN1	9326191024887	286
ATEN2	9326191024894	286
ATHENSG2	9326191029509	232
ATLANTA	9326191038211	226
AUTUMN01	9326191029028	123
AUTUMN02	9326191029035	123
AUTUMN03W	9326191029042	225
AUTUMN04TL	9326191029059	203
B		
BAGOTA	9326191038174	227
BALLE1	9326191039577	214
BALLE1R	9326191039607	214
BALLE2	9326191039584	214
BALLE2R	9326191039614	214
BALLE3	9326191039591	214
BALLE3R	9326191039621	214
BANCA-T1	9326191040313	196
BANCA-T2	9326191040320	196
BANCA-T3	9326191040337	196
BANDA1	9326191039003	271
BANDA2	9326191039010	271
BANDA3	9326191039027	271
BANDA4	9326191039034	271
BANDA5	9326191039041	271
BANDA6	9326191039058	271
BANDA7	9326191039065	271
BANDA8	9326191039072	271
BANQUET1	9326191036927	56
BARCELONA	9326191014475	232
BARRIQUE1	9326191036903	42
BARRIQUE2	9326191036910	42
BARRY	9323129057382	521
BAT001	9326191037894	407
BAT002	9326191037900	407
BATFIX01	9326191032127	503
BELLA1	9326191034398	107
BELLA2	9326191034404	107
BELLA3	9326191034411	107
BESTRI1	9326191038280	276
BESTRI2	9326191038297	276
BIG FELLA	9323129057399	521
BIG SLIM	9323129084838	529
BLACKBAND1	9326191018152	159
BLACKBAND1X3	9326191019982	161
BLACKBAND2	9326191018169	159
BLACKBAND2X3	9326191019999	161
BLACKBAND3	9326191018176	159
BLACKBAND4	9326191018183	159
BLACKBAND5	9326191019968	160
BLACKBAND6	9326191019975	160
BOCINA01	9326191032479	284
BOCINA02	9326191032653	284
BOL1A	9326191030963	365
BOL2A	9326191030970	365
BOL3A	9326191030987	365
BOL4A	9326191030994	365
BONITO1	9326191019630	118
BONITO2	9326191019647	118
BONITO3	9326191019654	118
BONITO6	9326191037818	118
BONITO7	9326191030000	118
BONITO8	9326191030017	118
BORDA1	9326191036095	354
BORDA2	9326191036101	354

Index by Part Numbers

PART NO.	BARCODE	PAGE
BORDA3	9326191036118	354
BORDA4	9326191036125	354
BORDA5	9326191036132	354
BORDA6	9326191036149	354
BOTANICA01	9326191032394	79
BOTANICA02	9326191032400	79
BOTANICA03A	9326191039201	79
BRICKTRI1	9326191037344	300
BRICKTRI2	9326191037351	300
BRICKTRI3	9326191037368	301
BRICKTRI4	9326191037375	301
BRIGHTON01	9326191029622	239
BRIGHTON02	9326191029639	239
BRILLER1	9326191039836	326
BRILLER2	9326191039843	326
BRISTOL	9326191038235	226
BROTE1	9326191034930	66
BROTE2	9326191034947	66
BUDDY	9326191037931	206
BUG003	9326191010712	471
BUG004	9326191010705	471
BULK1	9326191015793	302
BULK10	9326191025242	304
BULK11	9326191026706	305
BULK12	9326191026713	305
BULK13	9326191026683	305
BULK14	9326191026690	305
BULK15	9326191029455	306
BULK16	9326191029448	306
BULK17	9326191029479	306
BULK18	9326191029462	306
BULK2A	9326191039850	302
BULK3	9326191015816	303
BULK7A	9326191039867	303
BULK9	9326191025235	304
C		
CALIZ1	9326191038723	43
CALIZ2	9326191038730	43
CALIZ3	9326191038747	43
CALIZ4	9326191038754	43
CAMPANA1	9326191038686	52
CAMPANA2	9326191038693	52
CAMPANA3	9326191038709	52
CAMPANA4	9326191038716	52
CAN33D	9326191035425	459
CAN34D	9326191035432	459
CAN35D	9326191035449	459
CAN36D	9326191035456	459
CAN37D	9326191035463	459
CAN38D	9326191035470	459
CAN39D	9326191035487	459
CAN40D	9326191035494	459
CANAMO1	9326191035890	74
CANAMO2	9326191035906	74
CANASTA1	9326191035821	77
CANASTA2	9326191035838	77
CANNES	9326191015373	232
CARAMELLE1	9326191039874	28
CARAMELLE2	9326191039881	28
CARDIFF	9326191038228	228
CASA1	9326191018893	147
CASA2	9326191018909	147
CASA3	9326191018916	147
CAVIAR4	9326191028212	163
CAVIAR5	9326191028229	163
CAVIAR6	9326191028236	163
CELESTE1A	9326191039218	138
CELESTE2A	9326191039225	138
CELESTE3A	9326191039232	138
CEREMA1	9326191035784	70
CEREMA2	9326191035791	70
CEREMA3	9326191035807	70
CEREMA4	9326191035814	70
CESTA1	9326191035883	78
CF14DIM	9326191030321	454
CF15DIM	9326191030338	454
CF16DIM	9326191030345	454
CF17DIM	9326191030352	454
CF18DIM	9326191030369	462
CF19DIM	9326191030376	462
CF20DIM	9326191030383	462
CF21DIM	9326191030390	462
CF22DIM	9326191030406	463
CF23DIM	9326191030413	463
CF24DIM	9326191030420	463
CF25DIM	9326191030437	463
CF26DIM	9326191030444	465
CF27DIM	9326191030451	465
CF28DIM	9326191030468	465
CF29DIM	9326191030475	465
CF30DIM	9326191030482	457
CF31DIM	9326191030499	457
CF32DIM	9326191030505	457
CF33DIM	9326191030512	457

Index by Part Numbers

PART NO.	BARCODE	PAGE
CF34DIM	9326191030529	457
CF35DIM	9326191030536	457
CF36DIM	9326191030543	457
CF37DIM	9326191030550	457
CF38DIM	9326191030567	459
CF39DIM	9326191030574	459
CF3A	9326191021107	464
CF40DIM	9326191030581	459
CF41DIM	9326191030598	459
CF42DIM	9326191030604	459
CF43DIM	9326191030611	459
CF44DIM	9326191030628	459
CF45DIM	9326191030635	459
CF46DIM	9326191036279	468
CF47DIM	9326191036286	468
CF4A	9326191021114	464
CF5A	9326191021121	465
CF6A	9326191021138	465
CHAMA001	9326191026164	470
CHAMA002	9326191028281	470
CHAMPAN1	9326191034695	88
CHAMPAN1X3R	9326191034718	88
CHAMPAN1X3S	9326191034701	88
CHAMPAN2	9326191034725	88
CHAMPAN2X3R	9326191034749	88
CHAMPAN2X3S	9326191034732	88
CHAPEAU1	9326191033032	111
CHAPEAU2	9326191033049	111
CHAPEAU3	9326191033056	111
CHAPEAU4	9326191033063	111
CHESTER01	9326191029646	238
CHESTER02	9326191029653	238
CHEVEUX1	9326191018817	153
CHEVEUX2	9326191018824	153
CHEVEUX3	9326191018923	153
CHEVEUX4	9326191018930	153
CHUVA1	9326191025341	144
CHUVA2	9326191025358	144
CHUVA4	9326191040726	144
CIOTOLA1	9326191033155	98
CIOTOLA2	9326191033162	98
CIOTOLA3	9326191033179	98
CIOTOLA4	9326191033186	98
CIOTOLA5	9326191033193	98
CIOTOLA6	9326191033209	98
CKTRI01	9326191031786	476
CKTRI02	9326191031793	476
CKTRI03	9326191031809	476
CLA1615L	9326191014758	353
CLA1615LBL	9326191029431	353
CLA1615S	9326191014741	353
CLA1615SBL	9326191029424	353
CLA4736CB	9326191032950	307
CLA4PB	9326191014017	507
CLA6PB	9326191014024	507
CLACFA25BC	9326191015731	483
CLACFA25ES	9326191015748	483
CLACFB25BC	9326191015830	483
CLACFB25ES	9326191015847	483
CLACFC25BC	9326191015755	484
CLACFC25ES	9326191015762	484
CLACFD25BC	9326191017148	484
CLACFD25ES	9326191017131	484
CLACFE25BC	9326191017162	485
CLACFE25ES	9326191017155	485
CLACFF25BC	9326191017698	485
CLACFF25ES	9326191017704	485
CLADR12WFP	9326191012686	510
CLAFCL22WWW	9326191007804	481
CLAFCL32WCW	9326191007859	481
CLAFCL32WDL	9326191007866	481
CLAFCL40WNW	9326191009310	481
CLAHL150W	9326191006173	487
CLAHL275W	9326191003950	487
CLAT514WNW	9326191009280	480
CLAT514WWW	9326191000751	480
CLAW32	9326191014734	353
CLEO1	9326191033353	108
CLESSIDRA1	9326191038457	48
CLESSIDRA1W	9326191038518	218
CLESSIDRA1X3R	9326191038464	48
CLESSIDRA2	9326191038471	50
CLESSIDRA2W	9326191038525	218
CLESSIDRA2X3R	9326191038488	50
CLESSIDRA3	9326191038495	48
CLESSIDRA4	9326191038501	50
CLUSTER1	9326191031083	174
CLUSTER2	9326191031090	174
CLUSTER3	9326191031106	174
CLUSTER4	9326191031113	174
COLLO-T1	9326191040382	194
COLLO-T2	9326191040399	194
COLLO-T3	9326191040405	194
COLLO-T4	9326191040412	194

Index by Part Numbers

PART NO.	BARCODE	PAGE
COMET01	9326191030147	386
COMET02	9326191030154	386
COMET03	9326191030161	386
COMET04	9326191030178	386
COMET05	9326191035043	387
COMET06	9326191035050	387
COMET07	9326191036941	387
COMET08	9326191036958	387
CONN003	9326191026287	500
CONN004	9326191026294	500
CONN005	9326191037429	501
CONN006	9326191037436	501
CONN007	9326191037443	501
CONTOUR1	9326191032981	116
CONTOUR2	9326191032998	116
CONTOUR3	9326191033001	116
COOLIE01	9326191029257	367
COOLIE02	9326191032332	367
CORAZON1	9326191033308	105
CORAZON2	9326191033315	105
COSMOTRI03	9326191037252	394
COSMOTRI04	9326191037269	394
COSMOTRI05	9326191037276	394
COUP1	9326191035975	75
CRECER-F1	9326191040467	187
CRECER-F2	9326191040474	187
CRECER-F3	9326191040481	187
CRECER-T1	9326191040498	187
CRECER-T2	9326191040504	187
CRECER-T3	9326191040511	187
CRISTAL1	9326191038426	273
CRISTAL2	9326191038433	273
CRISTALLO-F1	9326191040573	189
CRISTALLO-T1	9326191040566	189
CUCHARA1	9326191040870	264
CUCHARA2	9326191040887	264
CUCHARA3	9326191040894	264
CUCHARA4	9326191040900	264
CUCHARA5	9326191040917	264
D		
DAVOS	9326191025044	233
DECK01	9326191032059	373
DECK02	9326191032066	373
DECK03	9326191032073	373
DECK04	9326191032080	373
DEKSEL01	9326191029912	266
DEKSEL02	9326191029929	222
DEKSEL03	9326191029936	170
DEKSEL04	9326191032301	266
DEKSEL05	9326191032318	222
DEKSEL06	9326191032325	171
DELHI	9326191028557	233
DHAKA	9326191038242	228
DIABLO1	9326191037009	72
DIABLO2	9326191037016	72
DIVO1	9326191016066	168
DIVO10	9326191034015	168
DIVO2	9326191016073	168
DIVO3	9326191016080	168
DIVO4	9326191016097	168
DIVO5	9326191016103	168
DIVO6	9326191016110	168
DIVO7	9326191016127	168
DIVO8	9326191016134	168
DIVO9	9326191016141	168
DIYBAT01	9326191031243	248
DIYBAT02	9326191031250	248
DIYBAT03	9326191031267	248
DIYBAT04	9326191031274	248
DIYBAT05	9326191031281	249
DIYBAT06	9326191031298	249
DIYBAT07	9326191031304	249
DIYBAT08	9326191031311	249
DIYBAT09	9326191031328	250
DIYBAT10	9326191031335	250
DIYBAT11	9326191031342	250
DIYBAT12	9326191031359	250
DIYBAT13	9326191031366	251
DIYBAT14	9326191031373	251
DIYBAT15	9326191031380	251
DIYBAT16	9326191031397	251
DIYBAT17	9326191031403	252
DIYBAT18	9326191031410	252
DIYBAT19	9326191031427	252
DIYBAT20	9326191031434	252
DIYBATC01	9326191031182	253
DIYBATC02	9326191031199	253
DIYBATC03	9326191031205	253
DIYBATC04	9326191031212	253
DIYBATC05	9326191031229	253
DIYBATC06	9326191031236	253
DIYPEN1	9326191037382	256
DIYPEN2	9326191037399	256
DIYVINTAJ1	9326191040603	247

Index by Part Numbers

PART NO.	BARCODE	PAGE
DIYVINTAJ2	9326191040610	247
DIYVINTAJ3	9326191040627	247
DIYVINTAJ4	9326191040634	247
DIYVINTAJ5	9326191040641	247
DIYVINTAJ6	9326191040658	247
DOCCIA1	9326191011504	311
DOCCIA2	9326191011498	311
DRIV1	9326191016790	510
DU10WG24D1CW	9326191020285	481
DUBAIG2	9326191027352	233
DUE18WG24D2WW	9326191031540	481
DUE26WWW4PIN	9326191018350	481
E		
ELLIP01	9326191010675	475
ELLIP02	9326191010668	475
ELLIP03	9326191010651	475
ELLIP04	9326191010248	475
ESCAMA1	9326191034985	115
ESCAMA2	9326191034992	115
ESPEJO1	9326191034572	94
ESPEJO1X3R	9326191034596	94
ESPEJO1X3S	9326191034589	94
ESPEJO2	9326191034602	94
ESPEJO2X3R	9326191034626	94
ESPEJO2X3S	9326191034619	94
ESPEJO3	9326191034633	96
ESPEJO3X3R	9326191034657	96
ESPEJO3X3S	9326191034640	96
ESPEJO4	9326191034664	96
ESPEJO4X3R	9326191034688	96
ESPEJO4X3S	9326191034671	96
ESPIRAL1	9326191041136	24
ESPIRAL2	9326191041143	24
ETH50.302VA	9327168095060	511
EX-108	9325574005604	532
EX180ZOOMTORCH	9360447007644	525
EX-288	9325574005574	531
EXCHARGINGPAD	9360447007637	525
EXDUOHEADLAMP	9360447007620	523
EXEC9012	9323129092314	519
EXECH4	9323129092284	519
EXECH7	9323129092291	519
EXECHU1	9323129092307	519
EXECHU2	9323129092512	519
EXELRIPPA	9323129057665	527
EXMINIFLOOD	9360447007613	524
F		
FARO1	9326191023187	130
FARO2	9326191023194	130
FINN1	9326191020179	136
FINN2	9326191020186	136
FINN3	9326191020193	136
FIREFLY01A	9326191036651	389
FLATLIGHT	9360447003400	528
FLATMATE	9326191037917	204
FLAUTA1	9326191041044	26
FLAUTA1W	9326191041051	210
FLAUTA2	9326191041068	26
FLAUTA2W	9326191041075	210
FLOOD15	9326191027741	380
FLOOD16	9326191027758	380
FLOTAR-F1	9326191040245	192
FLOTAR-F2	9326191040252	192
FLOTAR-T1	9326191040221	192
FLOTAR-T2	9326191040238	192
FLUFFY	9323129057900	521
FOSSETTA1	9326191038891	53
FOSSETTA2	9326191038907	53
FP1.2M2W	9326191014031	505
FP2M2W	9326191013614	505
FP2M2WWH	9326191030697	505
FP2M3W	9326191013621	505
FP2M3WWH	9326191030703	505
FP2WSB	9326191031472	505
FP2WSW	9326191031489	505
FP3M2WWH	9326191030710	505
FP3M3WWH	9326191030727	505
FR36	9326191015854	458
FR37	9326191014802	458
FR40	9326191014772	458
FR41D	9326191035340	457
FR42D	9326191035357	457
FR43D	9326191035364	457
FR44D	9326191035371	457
FR45D	9326191035388	457
FR46D	9326191035395	457
FR47D	9326191035401	457
FR48D	9326191035418	457
FRANGO1	9326191040771	436
FRANGO2	9326191040788	436
FRANGO3	9326191040795	436
FUMOSO1	9326191024023	146
FUMOSO2	9326191024030	146
FUMOSO3	9326191024047	146

Index by Part Numbers

PART NO.	BARCODE	PAGE
FUNALE1	9326191038921	38
FUNALE2	9326191038938	38
FUNALE3	9326191038945	38
FUNALE4	9326191038952	40
FUNALE5	9326191038969	40
FUNALE6	9326191038976	40
G		
G12510	9326191036163	463
G12511	9326191036170	463
G12512	9326191036187	463
G1259	9326191036156	463
G401	9326191036293	473
G403	9326191036880	473
G90001	9326191023835	472
G90002	9326191023842	472
G9510	9326191036200	462
G9511	9326191036217	462
G9512	9326191036224	462
G959	9326191036194	462
GALTRI01A	9326191036644	385
GALTRI02A	9326191036620	385
GAMBA1	9326191023316	151
GAMBA2	9326191023323	151
GEB1	9326191027666	358
GEB2	9326191027673	358
GEB3	9326191027680	358
GELATINA1	9326191039898	19
GELATINA2	9326191039904	19
GELATINA3	9326191039911	19
GELATINA4	9326191039928	20
GELATINA5	9326191039935	20
GELATINA6	9326191039942	20
GIROTRI1	9326191037832	274
GIROTRI2	9326191038075	274
GIROTRI3	9326191040009	275
GIROTRI4	9326191040016	275
GLANS01	9326191030925	287
GLANS02	9326191030932	287
GLANS03	9326191030949	287
GLANS04	9326191030956	287
GLAZE1	9326191019593	140
GLAZE10	9326191031014	141
GLAZE11	9326191031021	141
GLAZE2	9326191019609	140
GLAZE3	9326191019616	140
GLAZE5	9326191026171	140
GLS10DB	9326191024689	456

PART NO.	BARCODE	PAGE
GLS11DB	9326191029493	456
GLS12DB	9326191025723	456
GLS13B	9326191023460	455
GLS14B	9326191023477	455
GLS15B	9326191023484	455
GLS16B	9326191024702	455
GLS21B	9326191027321	455
GLS22B	9326191028106	455
GLS23B	9326191024719	455
GLS24B	9326191024597	455
GLS25B	9326191027338	455
GLS26B	9326191028090	455
GLS27B	9326191028113	455
GLS28B	9326191024603	455
GLS29D	9326191025716	456
GLS30D	9326191025709	456
GLS31	9326191027284	455
GLS32	9326191027291	455
GLS33	9326191027307	455
GLS34	9326191027314	455
GLS36D	9326191036231	454
GLS37D	9326191036248	454
GLS38D	9326191036255	454
GLS39D	9326191036262	454
GLS9DB	9326191024726	456
GLSTRI1D	9326191040207	453
GLSTRI2D	9326191040214	453
GLSTRIBC1	9326191036538	453
GLSTRIES1	9326191036545	453
GOLDA1	9326191033285	103
GOLDA2	9326191033292	103
GOLPE1	9326191035845	68
GOLPE2	9326191035869	68
GOLPE3	9326191035852	68
GOLPE4	9326191035876	68
GPO01	9326191025518	503
GPO02	9326191025495	503
GRABANDGO	9323129096435	528
GRABARAG	9326191010989	520
GU1001A	9326191038389	449
GU1002A	9326191038396	449
GU1003D	9326191034268	450
GU1004D	9326191034275	450
GU10B01A	9326191036606	450
GU10G01A	9326191036590	450
GU10R01A	9326191036583	450
GU10TRI1	9326191036514	449

Index by Part Numbers

PART NO.	BARCODE	PAGE
GX53001	9326191024467	472
GX53002	9326191024474	472
H		
HAK1	9326191038402	278
HAK2	9326191038419	278
HATHOR1	9326191029349	362
HATHOR2	9326191029325	362
HATHOR3	9326191029332	362
HEADLIGHTRESTKIT	9323129058020	522
HEKA1	9326191029288	289
HEKA2	9326191029295	289
HELSINKI	9326191038259	228
HEXA1	9326191030055	113
HEXA2	9326191030062	113
HEXADE1	9326191030079	112
HEXADE2	9326191030086	112
HIBSENSOR	9326191039416	438
HIBTRI2	9326191039409	438
HINK1	9326191024924	267
HINK2	9326191024931	267
HORTEN1	9326191023941	128
HORTEN2	9326191023958	128
HORUS1	9326191024788	361
HORUS2	9326191024795	361
HORUS3	9326191024801	361
HORUS4	9326191024818	361
HUECA1	9326191041020	25
HUECA2	9326191041037	25
I		
IDA1	9326191033322	102
IDA2	9326191033339	102
IGGLSQSS	9326191029974	374
IGGLSS	9326191029967	374
IGM1SS	9326191026492	376
IGM2SS	9326191026508	376
IGM3SS	9326191026515	376
IGM4SS	9326191026522	376
IGMEYESS	9326191026546	377
IGMGRSS	9326191026539	377
IGMLBR	9326191026607	375
IGMLC	9326191026621	375
IGMLSQBR	9326191026614	375
IGMLSQC	9326191026638	375
IGMLSQSS	9326191026591	375
IGMLSS	9326191026584	375
IGMSMC	9326191026560	377
IGMSMSS	9326191026577	377

PART NO.	BARCODE	PAGE
J		
JAMBES-F1	9326191040368	188
JAMBES-F2	9326191040375	188
JAMBES-T1	9326191040344	188
JAMBES-T2	9326191040351	188
JEREZ1	9326191034756	86
JEREZ1X3R	9326191034770	86
JEREZ1X3S	9326191034763	86
JEREZ2	9326191034787	86
JEREZ2X3R	9326191034800	86
JEREZ2X3S	9326191034794	86
JSSJL156	9325574006151	516
K		
KAM01	9326191030871	371
KATHAL1	9326191038846	32
KATHAL2	9326191038853	32
KATHAL3	9326191038860	32
KATHAL4	9326191038877	32
KATHAL5	9326191038884	32
KEILA1	9326191040924	263
KEILA2	9326191040931	263
KELLO-F1	9326191040443	186
KELLO-F2	9326191040450	186
KELLO-T1	9326191040429	186
KELLO-T2	9326191040436	186
KHALEESI1	9326191020759	117
KHALEESI2	9326191020766	117
KHALEESI3	9326191020773	117
KOLEC1	9326191036859	371
KOLONNE1	9326191039973	33
KOLONNE2	9326191039980	33
KOLONNE3	9326191039997	33
KUK1	9326191027642	290
KUK2	9326191027659	290
KUPOL1	9326191039379	30
KUPOL2	9326191039386	30
KUPOL3	9326191039393	30
L		
LABU1	9326191039959	22
LABU2	9326191039966	22
LAMINA1	9326191024054	145
LAMINA3	9326191024078	145
LAMINA4	9326191036897	145
LANTERNA1	9326191023163	131
LANTERNA2	9326191023170	131
LEADB001	9326191028434	506
LEADB002	9326191028441	506

Index by Part Numbers

PART NO.	BARCODE	PAGE
LEADB003	9326191028458	506
LEADB004	9326191028465	506
LEADB005	9326191028472	506
LEADB006	9326191028489	506
LEADB007	9326191028496	506
LEADB008	9326191028502	506
LEADB009	9326191028519	506
LEADW001	9326191028380	506
LEADW002	9326191028397	506
LEADW003	9326191028403	506
LEADW004	9326191028410	506
LEADW005	9326191028427	506
LED41WKL	9323129052974	531
LED65WKL	9323129052967	528
LEDB242	9323129058495	517
LEDB264	9323129058587	517
LEDB264FY	9323129058501	517
LEDB265	9323129058594	517
LEDB265D	9323129058600	517
LEDF271	9323129058525	518
LEDF272A	9323129058518	518
LEDF274	9323129058532	518
LEDRESIST	9323129058624	516
LEDW252	9323129058488	518
LEDW3157	9323129058617	519
LEDW920	9323129058556	518
LEDW920A	9323129058563	519
LEDW921	9323129058549	519
LEDW922	9323129058570	519
LEGNA1	9326191025402	137
LEGNA2	9326191025419	137
LEGNA3	9326191025426	137
LEGNA4	9326191025433	137
LENGAN1B	9326191040948	176
LENGAN1W	9326191040986	177
LENGAN2B	9326191040955	176
LENGAN2W	9326191040993	177
LENGAN3B	9326191040962	176
LENGAN3W	9326191041006	177
LENGAN4B	9326191040979	176
LENGAN4W	9326191041013	177
LH0.4M	9326191604058	505
LH1.5M	9326191031496	505
LIGHTHOUSE	9323129086559	524
LIMA1	9326191038266	229
LIMA2	9326191038273	229
LINEAL1L	9326191037627	243
LINEAL1M	9326191037597	243
LINEAL1S	9326191037566	243
LINEAL2L	9326191037634	243
LINEAL2M	9326191037603	243
LINEAL2S	9326191037573	243
LINEAL3L	9326191037641	243
LINEAL3M	9326191037610	243
LINEAL3S	9326191037580	243
LINEAL4L	9326191040047	243
LINEAL4M	9326191040030	243
LINEAL4S	9326191040023	243
LINKTRI01	9326191031991	434
LINKTRI02	9326191032004	434
LINKTRI03	9326191032011	434
LINKTRICN	9326191032042	434
LINKTRIFP	9326191032035	434
LITTLEKRAKKA	9323129086665	527
LONDON	9326191013331	234
LOTUS1	9326191020940	202
LOTUS2	9326191020957	202
LT4010	9326191024511	461
LT4011	9326191024504	461
LT4012	9326191024344	461
LT4012V1	9326191038105	461
LT4012V2	9326191038112	461
LT4013	9326191024207	461
LT4014	9326191024191	461
LT4015	9326191024184	461
LT4016	9326191024177	461
LT4017	9326191024160	461
LT40D01	9326191023576	460
LT40D02	9326191023569	460
LT40D03	9326191023552	460
LT40D04	9326191023545	460
LT40D07	9326191023491	460
LT40D08	9326191023408	460
LUSSO-T1	9326191040542	197
LUSSO-T2	9326191040559	197
LYNX1	9326191038532	490
LYON	9326191026010	238
M		
MAGNUM1	9326191019722	268
MAGNUM2	9326191019715	268
MANGA1	9326191037849	54
MANGA2	9326191037856	54
MANGA3	9326191037863	54
MANGA4	9326191037870	54

Index by Part Numbers

PART NO.	BARCODE	PAGE
MANGA5	9326191037887	54
MANU1	9326191036989	156
MANU2	9326191036996	156
MARACA1	9326191036453	58
MARACA2	9326191036460	58
MARACA3	9326191036477	58
MARACA4	9326191036484	58
MARACA5	9326191036491	58
MARBRE1	9326191037023	67
MARBRE2	9326191037030	67
MARBRE3	9326191037047	67
MARINA1	9326191011481	288
MARINA2	9326191011474	288
MARRAKESH01	9326191032349	82
MARRAKESH02	9326191032356	82
MARRAKESH03A	9326191037283	82
MARRAKESH04	9326191032370	82
MARRAKESH05	9326191032387	82
MARRAKESH06	9326191038600	83
MARRAKESH07	9326191038617	83
MARRAKESH08	9326191038624	83
MARRAKESH09	9326191038631	83
MARRAKESH10	9326191038648	83
MARTE1	9326191034954	152
MARTE2	9326191034961	152
MARTE3	9326191034978	152
MASON1	9326191018589	148
MASON2	9326191018596	148
MASON3	9326191018602	148
MASON4	9326191018619	148
MASON5	9326191018626	148
MASON6	9326191018633	148
MASON7	9326191018640	148
MASON8	9326191018657	148
MASON9	9326191018664	148
MATRIX-B	9326191020049	162
MATRIX-W	9326191020056	162
MESTOLO1	9326191040092	366
MESTOLO2	9326191040108	366
METI01	9326191029066	122
METI02	9326191029073	122
METI03W	9326191029080	225
MIKRO1	9326191037061	104
MIKRO2	9326191037078	104
MINIGRAB	9360447003462	520
MODELLO1	9326191024009	139
MODELLO2	9326191024016	139
MOTION1	9326191024399	393
MOTION2	9326191024405	393
MOTION3	9326191024412	393
MOTION4	9326191024429	393
MR1101	9326191034558	452
MR1102	9326191034565	452
MR1601A	9326191010699	451
MR1602A	9326191010682	451
MR16B01A	9326191036576	452
MR16G01A	9326191036569	452
MR16R01A	9326191036552	452
MR16TRI1	9326191036521	451
N		
NAGOYA	9326191038204	230
NARVIK1	9326191023910	167
NARVIK2	9326191023927	167
NARVIK3	9326191023934	167
NED01	9326191029219	298
NED02	9326191029226	298
NETA1	9326191041082	27
NETA2	9326191041099	27
NETA3	9326191041105	27
NETA4	9326191041112	27
NETA5	9326191041129	27
NEW YORKG2	9326191032974	234
NIGHT01	9326191014079	435
NORDIC1	9326191017810	129
NORDIC2	9326191017827	129
NORDIC3	9326191017834	129
NORDIC4	9326191017841	129
NORDIC5	9326191017858	129
NORDIC6	9326191017865	129
NOVADBLK02	9326191033223	391
NOVADBR02	9326191033230	391
NOVADLUX01A	9326191037207	390
NOVADLUX02	9326191033216	391
NOVATRIS	9326191034503	392
O		
OGATRI1	9326191037405	299
OGATRI2	9326191037412	299
OLA01	9326191032448	291
OLA02	9326191032622	291
ORDITO1	9326191023354	143
ORDITO2	9326191023361	143
ORDITO3	9326191023378	143
ORIGAMI1	9326191035289	80
ORIGAMI2	9326191035296	80

Index by Part Numbers

PART NO.	BARCODE	PAGE
ORIGAMI3	9326191035302	80
ORIGAMI4	9326191035319	80
ORIGAMI5	9326191035326	80
ORIGAMI6	9326191035333	80
OTTER1	9326191016806	509
OTTER2	9326191035982	509
OTTER24V1	9326191022517	510
OTTER24V2	9326191022487	510
OTTER24V3	9326191022494	510
OTTER24V4	9326191022500	510
OTTER3	9326191035999	509
OTTER4	9326191036002	509
OTTER5	9326191036019	509
OTTER6	9326191036026	509
OTTER7	9326191036637	509
OTTER8	9326191037825	509
OVALIS1	9326191040849	215
OVALIS2	9326191040856	215
OVALIS3	9326191040863	215
OYSDIM001	9326191028328	309
OYSDIM002	9326191028335	309
OYSDIM003	9326191010934	403
OYSDIM004	9326191010927	403
OYSDIM005	9326191010910	403
OYSTRI1	9326191039300	308
OYSTRI2	9326191039317	308
P		
PAPILLON1	9326191033070	110
PAPILLON2	9326191033087	110
PAR3001	9326191030116	467
PAR3802	9326191038150	466
PARAGUAS-F1	9326191040580	190
PARAGUAS-T1	9326191040597	190
PARIS	9326191013355	234
PAROL1	9326191038037	261
PAROL2	9326191038044	261
PAROL3	9326191038051	261
PAROL4	9326191038068	261
PAROL5	9326191038327	261
PASTEL01A	9326191036316	164
PASTEL02A	9326191036323	164
PASTEL03A	9326191036330	164
PASTEL04A	9326191036347	164
PASTEL05A	9326191036354	164
PASTEL06A	9326191036361	164
PASTEL07A	9326191036378	164
PASTEL08A	9326191036385	165
PASTEL09A	9326191036392	165
PASTEL10A	9326191036408	165
PASTEL11A	9326191036415	165
PASTEL12A	9326191036422	165
PASTEL13A	9326191036439	165
PASTEL14A	9326191036446	165
PASTEL15TL	9326191027901	200
PASTEL16TL	9326191027918	200
PASTEL17TL	9326191027925	200
PASTEL18TL	9326191027932	200
PASTEL19TL	9326191027949	200
PASTEL20TL	9326191027956	200
PASTEL21TL	9326191027963	200
PASTEL22FL	9326191027970	201
PASTEL23FL	9326191027987	201
PASTEL24FL	9326191027994	201
PASTEL25FL	9326191028007	201
PASTEL26FL	9326191028014	201
PASTEL27FL	9326191028021	201
PASTEL28FL	9326191028038	201
PASTILLE1	9326191033018	109
PASTILLE2	9326191033025	109
PATERA1	9326191035227	85
PATERA2	9326191035234	85
PATERA3	9326191035241	85
PAYONG1	9326191037993	262
PAYONG2	9326191038006	262
PAYONG3	9326191038013	262
PAYONG4	9326191038020	262
PAYONG5	9326191038334	262
PDL1SQBL	9326191029271	321
PDL1SQBRZ	9326191028175	321
PDL1SQSS	9326191028199	321
PDLUDRECTBLK	9326191032660	322
PDLUDRECTBRZ	9326191028182	322
PDLUDRECTSS	9326191028205	322
PELOTA1	9326191037146	60
PELOTA2	9326191037153	60
PELOTA3	9326191037160	60
PELOTA4	9326191037177	60
PELOTA5	9326191037184	60
PELOTA6	9326191037191	60
PEN2	9326191016202	173
PEN3	9326191016219	173
PENLIGHT	9360447003424	526
PENMATE	9326191037924	205
PENSHADE1	9326191039638	34

Index by Part Numbers

PART NO.	BARCODE	PAGE
PENSHADE10	9326191039720	35
PENSHADE11	9326191039737	36
PENSHADE12	9326191039744	36
PENSHADE13	9326191039751	36
PENSHADE14	9326191039768	36
PENSHADE15	9326191039775	36
PENSHADE16	9326191039782	36
PENSHADE17	9326191039799	36
PENSHADE18	9326191039805	36
PENSHADE2	9326191039645	34
PENSHADE3	9326191039652	35
PENSHADE4	9326191039669	35
PENSHADE5	9326191039676	35
PENSHADE6	9326191039683	35
PENSHADE7	9326191039690	35
PENSHADE8	9326191039706	35
PENSHADE9	9326191039713	35
PESINI1	9326191035166	84
PESINI1W	9326191035104	216
PESINI2	9326191035173	84
PESINI2W	9326191035111	216
PESINI3	9326191035180	84
PESINI3W	9326191035128	216
PESINI4	9326191035197	84
PESINI4W	9326191035135	216
PESINI5	9326191035203	84
PESINI5W	9326191035142	216
PESINI6	9326191035210	84
PESINI6W	9326191035159	216
PG1ABL	9326191026874	336
PG1ABR	9326191030246	327
PG1ABR1	9326191038358	328
PG1ABR2	9326191038570	329
PG1AC	9326191026843	330
PG1ACEC	9326191027086	331
PG1ACECA	9326191029837	332
PG1ASHSIL	9326191028151	340
PG1ASIL	9326191026898	341
PG1ASS	9326191026850	333
PG1AT	9326191026867	334
PG1AWH	9326191026881	338
PG1FBL	9326191026812	336
PG1FBR	9326191030222	327
PG1FBR1	9326191038365	328
PG1FBR2	9326191038587	329
PG1FC	9326191026782	330
PG1FCEC	9326191027109	331

PART NO.	BARCODE	PAGE
PG1FCECA	9326191029851	332
PG1FSHSIL	9326191028144	340
PG1FSIL	9326191026836	341
PG1FSS	9326191026799	333
PG1FT	9326191026805	334
PG1FWH	9326191026829	338
PG2ABL	9326191026935	336
PG2ABR	9326191030208	327
PG2AC	9326191026904	330
PG2ACEC	9326191027147	331
PG2ACECA	9326191029899	332
PG2ASHSIL	9326191028168	340
PG2ASIL	9326191026959	341
PG2ASS	9326191026911	333
PG2AT	9326191026928	334
PG2AWH	9326191026942	338
PG2BARBL	9326191026997	337
PG2BART	9326191026966	335
PG2BARWH	9326191029677	339
PG3BARBL	9326191027000	337
PG3BART	9326191026973	335
PG3BARWH	9326191029684	339
PG4BARBL	9326191027017	337
PG4BART	9326191026980	335
PG4BARWH	9326191029691	339
PG4SQBL	9326191029707	337
PG4SQT	9326191029714	335
PG4SQWH	9326191029660	339
PGUDBL	9326191026751	336
PGUDBR	9326191030185	327
PGUDBR1	9326191038341	328
PGUDBR2	9326191038563	329
PGUDC	9326191026720	330
PGUDCEC	9326191027123	331
PGUDCECA	9326191029875	332
PGUDSHSIL	9326191028137	340
PGUDSIL	9326191026775	341
PGUDSS	9326191026737	333
PGUDT	9326191026744	334
PGUDWH	9326191026768	338
PHARE01G	9326191029721	356
PHARE01M	9326191029981	357
PHARE02G	9326191029738	356
PHARE02M	9326191029998	357
PHARE03EXT	9326191032097	356
PHARE03G	9326191029752	356
PHARE03M	9326191029745	357

Index by Part Numbers

PART NO.	BARCODE	PAGE
PHARE04EXT	9326191032103	356
PHARE04G	9326191029776	356
PHARE04M	9326191029769	357
PHARE05G	9326191029790	356
PHARE05M	9326191029783	357
PHARE06M	9326191030260	370
PHARE07M	9326191030277	370
PHOENIX	9326191015359	235
PIATTO1	9326191018831	172
PIATTO2	9326191018848	172
PILOT01	9326191034282	468
PINO1	9326191038761	44
PINO2	9326191038778	44
PINO3	9326191038785	44
PINO4X3R	9326191038792	44
PINO5	9326191038808	46
PINO6	9326191038815	46
PINO7	9326191038822	46
PINO8X3R	9326191038839	46
PLANA01	9326191032431	282
PLANA02	9326191032615	282
PLC003	9326191039294	474
PLUG001	9326191026263	506
PLUG002	9326191028373	506
PM1ABL	9326191020490	349
PM1ABR	9326191030253	342
PM1ACEC	9326191027079	343
PM1ACECA	9326191029844	344
PM1ASHSIL	9326191019906	346
PM1ASIL	9326191019913	348
PM1ASS	9326191021329	345
PM1AT	9326191021145	347
PM1AWH	9326191020261	350
PM1FBL	9326191022135	349
PM1FBR	9326191030239	342
PM1FCEC	9326191027093	343
PM1FCECA	9326191029868	344
PM1FSIL	9326191022111	348
PM1FSS	9326191017247	345
PM1FT	9326191022142	347
PM1FWH	9326191022128	350
PM2ABL	9326191019555	349
PM2ABR	9326191030215	342
PM2ACEC	9326191027130	343
PM2ACECA	9326191029905	344
PM2ASHSIL	9326191019128	346
PM2ASIL	9326191019135	348
PM2ASS	9326191019579	345
PM2AT	9326191019562	347
PM2AWH	9326191019371	350
PMUDBL	9326191021480	349
PMUDBR	9326191030192	342
PMUDCEC	9326191027116	343
PMUDCECA	9326191029882	344
PMUDSHSIL	9326191018442	346
PMUDSIL	9326191018480	348
PMUDSS	9326191022081	345
PMUDT	9326191021725	347
PMUDWH	9326191018497	350
PT818W5FT	9326191019548	478
PT82FT4	9326191024351	478
PT8TRI1	9326191037740	477
PT8TRI2	9326191037795	477
PT8TRI3	9326191038914	477
R		
R63L1B	9326191033377	467
R63L2B	9326191027611	467
R71A	9326191023828	469
R72A	9326191023859	469
R73A	9326191023866	469
R74A	9326191023873	469
R75	9326191037290	469
R76	9326191037306	469
R77	9326191037313	469
R78	9326191037320	469
R80L1B	9326191025792	467
R80L2B	9326191025808	467
RACHA1	9326191040818	209
RACHA2	9326191040825	209
RACHA3	9326191040832	209
RAZORDM001A	9326191032196	408
RAZORDM002A	9326191032202	408
RAZORDMW01	9326191032745	409
RAZORDMW02	9326191032752	409
REMO1	9326191028601	294
REMO2	9326191028618	294
REPISATRI1	9326191038303	279
REPISATRI2	9326191038310	279
RICTUS1	9326191027413	142
RICTUS2	9326191027420	142
RICTUS3	9326191027437	142
RICTUS4	9326191027444	142
RICTUS5	9326191027451	142
RICTUS6	9326191027468	142

Index by Part Numbers

PART NO.	BARCODE	PAGE
RIOG2	9326191036613	235
ROCHE1	9326191035258	101
ROCHE2	9326191035265	101
ROCKY	9323129088461	530
RODILLO1	9326191039423	213
RODILLO2	9326191039430	213
RODILLO3	9326191039447	213
RODILLO4	9326191039454	213
RODILLO5	9326191039461	213
ROMEG2	9326191025440	235
ROTA1	9326191035968	76
S		
SABER1	9326191039164	208
SABER2	9326191039171	208
SADDLE001	9326191026188	504
SADDLE002	9326191026195	504
SADDLE003	9326191026201	504
SADDLE004	9326191026218	504
SADDLE005	9326191026225	504
SADDLE006	9326191026232	504
SADDLE007	9326191026249	504
SADDLE008	9326191026256	504
SAKUP1	9326191039812	351
SAKUP2	9326191039829	351
SANTIAGO	9326191038167	231
SARI1	9326191035951	73
SARI2	9326191036668	73
SEATTLE1	9326191013850	237
SEATTLE2	9326191013867	237
SEATTLE3	9326191013874	237
SEC01	9326191029615	440
SEC01S	9326191029592	440
SEC02	9326191029608	440
SEC02S	9326191029585	440
SEC05	9326191034299	323
SEC06	9326191034305	324
SEC07	9326191034312	325
SEC08	9326191034329	323
SEC08S	9326191034350	323
SEC09	9326191034336	324
SEC09S	9326191034367	324
SEC10	9326191034343	325
SEC10S	9326191034374	325
SEC11S	9326191038440	379
SEKER1	9326191011559	363
SEKER2	9326191011542	363
SEKER3	9326191011535	363

PART NO.	BARCODE	PAGE
SENORITA1	9326191022227	120
SENORITA2	9326191022234	120
SENORITA3	9326191022241	120
SENORITA4	9326191024368	120
SENORITA5	9326191024375	120
SENORITA6	9326191024382	120
SENS001	9326191025082	492
SENS002	9326191025099	492
SENS003	9326191025105	493
SENS004	9326191025112	494
SENS005	9326191025129	495
SENS007	9326191027710	496
SENS008	9326191030673	496
SENS009	9326191032134	497
SENS010	9326191032141	497
SENS011	9326191034251	498
SENS012	9326191040528	499
SENS013	9326191040535	499
SENSORHEADLIGHT	9323129088447	523
SENTINEL1	9326191030031	158
SENTINEL2	9326191030048	158
SETH1	9326191024825	360
SETH2	9326191024832	360
SETH3	9326191024849	360
SETH4	9326191024856	360
SG1ACEC	9326191027161	352
SG1ACECA	9326191029813	352
SHADE01	9326191031915	254
SHADE02	9326191031922	254
SHADE03	9326191031939	254
SHADE05	9326191031953	255
SHADE06	9326191031960	255
SHADE07	9326191031977	255
SHADE09	9326191031946	254
SHADE10	9326191031984	255
SHADOWTRI1	9326191039324	272
SHADOWTRI2	9326191039331	272
SHADOWTRI3	9326191040665	272
SHADOWTRI4	9326191040672	272
SHIELDTRI1	9326191034466	381
SHIELDTRI2	9326191034473	381
SHOPTRI	9326191031816	397
SHOPTRI01	9326191032738	396
SJS1200	9325574006298	513
SJS1500	9325574006281	514
SJS1500TP	9325574006304	514
SJS3000	9326191029486	515

Index by Part Numbers

PART NO.	BARCODE	PAGE
SKOPA1	9326191024900	265
SKOPA2	9326191024917	265
SLICKTRI1R	9326191032486	395
SLICKTRI1S	9326191032516	395
SLICKTRI2R	9326191032493	395
SLICKTRI2S	9326191032523	395
SLICKTRI3R	9326191032509	395
SLICKTRI3S	9326191032530	395
SLIM BENDY	9323129088454	530
SM1ACEC	9326191027154	352
SM1ACECA	9326191029820	352
SMIP68ASS	9326191029264	372
SMTFLOOD1	9326191036866	378
SMTFLOOD2	9326191036873	378
SMTGU101	9326191034381	448
SMTNOVA1	9326191032233	388
SMTOYS1	9326191032240	404
SOCK2	9326191025136	502
SOCK3	9326191029417	502
SOMBRA01	9326191032462	283
SOMBRA02	9326191032646	283
SPECTRA01	9326191028762	470
SPECTRA02	9326191028779	470
SPECTRA03	9326191028786	470
SPECTRA04	9326191028793	470
SPIAGGIA1	9326191023255	155
SPIAGGIA2	9326191023262	155
SPIAGGIA3	9326191023279	155
SPIAGGIA4	9326191023286	155
SPM1ALBL	9326191030680	369
SPM1ALC	9326191026430	369
SPM1ALSS	9326191026447	369
SPM2ALBL	9326191029806	369
SPM2ALC	9326191026454	369
SPM2ALSS	9326191026461	369
SPMSBL	9326191027215	368
SPMSBL86	9326191027185	368
SPMSBR1	9326191038372	368
SPMSBR2	9326191038594	368
SPMSC	9326191027208	368
SPMSSS	9326191027192	368
SPMSSS86	9326191027178	368
SPMST	9326191027222	368
SPOT-BAR2B	9326191032813	178
SPOT-BAR2W	9326191032806	179
SPOT-BAR3B	9326191032837	178
SPOT-BAR3W	9326191032820	179
SPOT-BAR4B	9326191032851	178
SPOT-BAR4W	9326191032844	179
SPOT-R1B	9326191032776	178
SPOT-R1W	9326191032769	179
SPOT-R3B	9326191032875	178
SPOT-R3W	9326191032868	179
SPOT-S1B	9326191032790	178
SPOT-S1W	9326191032783	179
SPY-C1	9326191019760	259
SPY-C2	9326191019753	259
SPY-W1	9326191019746	259
SPY-W2	9326191019739	259
STE10	9326191026652	315
STE12	9326191026676	316
STE13	9326191029233	317
STE14	9326191029240	317
STE15	9326191030284	318
STE16	9326191030291	318
STE17	9326191030307	318
STE18	9326191030314	318
STE19	9326191030796	319
STE20	9326191030802	319
STE21	9326191030819	319
STE22	9326191030826	319
STE23	9326191036507	316
STE24	9326191039096	316
STE25	9326191039102	316
STE26	9326191039270	319
STE27	9326191039287	315
STE28	9326191040733	320
STE29	9326191040740	320
STE3	9326191015045	312
STE30	9326191040757	320
STE31	9326191040764	320
STE4	9326191015052	312
STE5	9326191025259	313
STE6	9326191025266	313
STE7	9326191025587	314
STE8	9326191025594	314
STE9	9326191026645	315
STEAM2	9326191020827	224
STEAM3	9326191020834	224
STRAND1	9326191023231	154
STRAND2	9326191023248	154
STRUNG1	9326191026102	220
SUB3	9326191027390	466
SURAT	9326191038198	231

Index by Part Numbers

PART NO.	BARCODE	PAGE
SURFACE13	9326191025273	398
SURFACE14	9326191025280	398
SURFACE17A	9326191032882	399
SURFACE18A	9326191032899	399
SURFACE22	9326191032905	399
SURFACE23	9326191032912	399
SURFACE24	9326191032929	399
SURFACE25	9326191032936	399
SURFACETRI1R	9326191032547	405
SURFACETRI1S	9326191032578	405
SURFACETRI2R	9326191032554	405
SURFACETRI3R	9326191032561	405
SURFACETRI3S	9326191032592	405
SWING1	9326191021916	126
SWING2	9326191021923	126
SWING3	9326191021930	126
SWING4	9326191021947	126
SWING5	9326191021954	126
SWING6	9326191021961	126
SYDNEYG2	9326191029516	236
T		
TACHE1	9326191037085	180
TACHE10	9326191037504	183
TACHE11	9326191037511	183
TACHE12	9326191037528	183
TACHE13	9326191037535	184
TACHE14	9326191037542	184
TACHE15	9326191037559	184
TACHE2	9326191037092	180
TACHE3	9326191037108	180
TACHE4	9326191037115	181
TACHE5	9326191037122	181
TACHE6	9326191037139	181
TACHE7	9326191037474	182
TACHE8	9326191037481	182
TACHE9	9326191037498	182
TAMA1	9326191028588	296
TAMA2	9326191028595	296
TAMBURA01	9326191028656	124
TAMBURA02	9326191028649	124
TAMBURA03	9326191028670	124
TAMBURA04	9326191028663	124
TAMBURA05	9326191028694	124
TAMBURA06	9326191028687	124
TAMBURA07TL	9326191028717	198
TAMBURA08TL	9326191028700	198
TAMBURA09TL	9326191028724	198
TAMBURA10TL	9326191028731	198
TAMBURA11FL	9326191028748	198
TAMBURA12FL	9326191028755	198
TAZZA1	9326191040269	37
TAZZA-T1	9326191040276	191
TAZZA-T2	9326191040283	191
TAZZA-T3	9326191040290	191
TELE1	9326191037757	383
TELEPLATE1	9326191037801	383
TIEMPO1	9326191039478	212
TIEMPO2	9326191039485	212
TIEMPO3	9326191039492	212
TIEMPO4	9326191039508	212
TIEMPO5	9326191039515	212
TIJUANA	9326191038181	231
TOCA1	9326191028625	292
TOCA2	9326191028632	292
TOCA3	9326191033254	293
TOCA4	9326191033261	293
TOE2530PRO	9325574003419	531
TONO1	9326191024115	150
TONO2	9326191024122	150
TONO3	9326191024139	150
TOPATRI1	9326191038129	281
TOPATRI2	9326191038136	281
TOREN1	9326191038679	364
TORQUE1	9326191019708	269
TORQUE2	9326191019685	269
TORQUE3	9326191029943	270
TORQUE4	9326191029950	270
TORQUE5	9326191039089	270
TORQUE6	9326191039119	270
TORQUE7	9326191039249	270
TORQUE8	9326191039256	270
TORQUE9	9326191039263	270
TORRE1	9326191036033	355
TORRE2	9326191036040	355
TORRE3	9326191036057	355
TORRE4	9326191036064	355
TORRE5	9326191036071	355
TORRE6	9326191036088	355
TP001	9325574006076	513
TRATTINO1	9326191034879	90
TRATTINO1X3R	9326191034893	90
TRATTINO1X3S	9326191034886	90
TRATTINO2	9326191034909	90
TRATTINO2X3R	9326191034923	90

Index by Part Numbers

PART NO.	BARCODE	PAGE
TRATTINO2X3S	9326191034916	90
TREEC	9326191027062	258
TRK1BL1M	9326191033384	425
TRK1BL2M	9326191033391	425
TRK1BLADAP1	9326191035692	429
TRK1BLADAP2	9326191035715	429
TRK1BLCON1	9326191033421	425
TRK1BLCON2	9326191033438	425
TRK1BLCON3L	9326191033445	426
TRK1BLCON3R	9326191033452	426
TRK1BLCON4L1	9326191033469	426
TRK1BLCON4L2	9326191033476	426
TRK1BLCON4R1	9326191033483	426
TRK1BLCON4R2	9326191033490	426
TRK1BLCON5	9326191033506	427
TRK1BLCON6L	9326191033513	427
TRK1BLCON6R	9326191033995	427
TRK1BLEND	9326191033520	427
TRK1BLLIVEL	9326191033407	427
TRK1BLLIVER	9326191033414	427
TRK1WH1M	9326191033537	425
TRK1WH2M	9326191033544	425
TRK1WHADAP1	9326191035685	429
TRK1WHADAP2	9326191035708	429
TRK1WHCON1	9326191033575	425
TRK1WHCON2	9326191033582	425
TRK1WHCON3L	9326191033599	426
TRK1WHCON3R	9326191033605	426
TRK1WHCON4L1	9326191033612	426
TRK1WHCON4L2	9326191033629	426
TRK1WHCON4R1	9326191033636	426
TRK1WHCON4R2	9326191033643	426
TRK1WHCON5	9326191033650	427
TRK1WHCON6L	9326191033667	427
TRK1WHCON6R	9326191034008	427
TRK1WHEND	9326191033674	427
TRK1WHLIVEL	9326191033551	427
TRK1WHLIVER	9326191033568	427
TRK3BL1M	9326191033681	417
TRK3BL2M	9326191033698	417
TRK3BLADAP3	9326191035739	422
TRK3BLADAP4	9326191035753	422
TRK3BLCEILKIT1	9326191035524	420
TRK3BLCEILKIT2	9326191035548	420
TRK3BLCON1	9326191033728	417
TRK3BLCON2	9326191033735	417
TRK3BLCON3L	9326191033742	418
TRK3BLCON3R	9326191033759	418
TRK3BLCON4L1	9326191033766	418
TRK3BLCON4L2	9326191033773	418
TRK3BLCON4R1	9326191033780	418
TRK3BLCON4R2	9326191033797	418
TRK3BLCON5	9326191033803	419
TRK3BLCON6	9326191033810	419
TRK3BLEND	9326191033827	420
TRK3BLFLEXCON	9326191035661	419
TRK3BLLIVEL	9326191033704	420
TRK3BLLIVER	9326191033711	420
TRK3BLNIPCON	9326191035777	422
TRK3BLSUSCLAMP	9326191035531	424
TRK3BLSUSKIT1	9326191035500	423
TRK3BLSUSKIT2	9326191035517	423
TRK3BLSUSKIT3	9326191035555	423
TRK3BLSUSKIT4	9326191035562	423
TRK3BLSUSKIT5	9326191035579	424
TRK3WH1M	9326191033834	417
TRK3WH2M	9326191033841	417
TRK3WHADAP3	9326191035722	422
TRK3WHADAP4	9326191035746	422
TRK3WHCEILKIT1	9326191035609	420
TRK3WHCEILKIT2	9326191035623	420
TRK3WHCON1	9326191033872	417
TRK3WHCON2	9326191033889	417
TRK3WHCON3L	9326191033896	418
TRK3WHCON3R	9326191033902	418
TRK3WHCON4L1	9326191033919	418
TRK3WHCON4L2	9326191033926	418
TRK3WHCON4R1	9326191033933	418
TRK3WHCON4R2	9326191033940	418
TRK3WHCON5	9326191033957	419
TRK3WHCON6	9326191033964	419
TRK3WHEND	9326191033971	420
TRK3WHFLEXCON	9326191035678	419
TRK3WHLIVEL	9326191033858	420
TRK3WHLIVER	9326191033865	420
TRK3WHNIPCON	9326191035760	422
TRK3WHSUSCLAMP	9326191035616	424
TRK3WHSUSKIT1	9326191035586	423
TRK3WHSUSKIT2	9326191035593	423
TRK3WHSUSKIT3	9326191035630	423
TRK3WHSUSKIT4	9326191035647	423
TRK3WHSUSKIT5	9326191035654	424
TRKB1G002	9326191034510	416
TRKB3G002	9326191034534	416

Index by Part Numbers

PART NO.	BARCODE	PAGE
TRKTRI01	9326191036965	412
TRKTRI02	9326191036972	412
TRKTRI03	9326191037450	414
TRKTRI04	9326191037467	414
TRKTRI05	9326191040689	413
TRKTRI06	9326191040696	413
TRKTRI07	9326191040702	415
TRKTRI08	9326191040719	415
TRKW1G002	9326191034527	416
TRKW3G002	9326191034541	416
TUBO1	9326191037771	384
TUBO2	9326191037788	384
TUILE1	9326191033094	81
TUILE2	9326191033100	81
TUILE3	9326191033117	81
TUILE4	9326191033124	81
TUILE5	9326191033131	81
TUILE6	9326191033148	81
TULIP1	9326191034817	92
TULIP1X3R	9326191034831	92
TULIP1X3S	9326191034824	92
TULIP2	9326191034848	92
TULIP2X3R	9326191034862	92
TULIP2X3S	9326191034855	92
TWISTTORCH	9360447003417	526
U		
ULAN1	9326191011528	310
ULAN2	9326191011511	310
V		
VAINA1	9326191035005	106
VAINA2	9326191035012	106
VAINA3	9326191035029	106
VAINA4	9326191035036	106
VANIDAD1L	9326191038549	244
VANIDAD2L	9326191038556	244
VANITAS1L	9326191037719	241
VANITAS1M	9326191037689	241
VANITAS1S	9326191037658	241
VANITAS2L	9326191037726	241
VANITAS2M	9326191037696	241
VANITAS2S	9326191037665	241
VANITAS3L	9326191037733	241
VANITAS3M	9326191037702	241
VANITAS3S	9326191037672	241
VANITY-1	9326191025013	245
VANITY-2	9326191025051	245
VARILLAS1	9326191039522	211
VARILLAS2	9326191039539	211
VARILLAS3	9326191039546	211
VARILLAS4	9326191039553	211
VARILLAS5	9326191039560	211
VELA	9326191025532	491
VENETO1BK	9326191021879	157
VENETO1X3BK	9326191021886	157
VENETO-W1	9326191022005	223
VENETO-W2	9326191021992	223
VENICEG2	9326191027369	236
VIENNA	9326191014468	236
VIFTU1	9326191040801	446
VILLAKU1	9326191037955	260
VILLAKU2	9326191037962	260
VINTAJ1	9326191036675	62
VINTAJ10	9326191036767	63
VINTAJ11	9326191036774	63
VINTAJ12	9326191036781	63
VINTAJ13	9326191036798	64
VINTAJ14	9326191036804	64
VINTAJ15	9326191036811	64
VINTAJ16	9326191036828	64
VINTAJ17	9326191036835	64
VINTAJ18	9326191036842	64
VINTAJ2	9326191036682	62
VINTAJ3	9326191036699	62
VINTAJ4	9326191036705	62
VINTAJ5	9326191036712	62
VINTAJ6	9326191036729	62
VINTAJ7	9326191036736	63
VINTAJ8	9326191036743	63
VINTAJ9	9326191036750	63
VINUM1	9326191035081	100
VINUM1W	9326191035067	219
VINUM2	9326191035098	100
VINUM2W	9326191035074	219
VIRUN1	9326191037948	57
VOTIF1	9326191036934	55
VOX1	9326191028564	295
VOX2	9326191028571	295
VOX3	9326191010897	295
W		
WAND1	9326191039348	29
WAND2	9326191039355	29
WAND3	9326191039362	29
WEDGEGBL	9326191027048	297
WEDGEGC	9326191027024	297

Index by Part Numbers

PART NO.	BARCODE	PAGE
WEDGEGSS	9326191027031	297
WEDGEGWH	9326191027055	297
WHITEBAND1X3	9326191020001	161
WHITEBAND2X3	9326191020018	161
WHITEBAND5	9326191020025	160
WHITEBAND6	9326191020032	160
WIGTRI1	9326191039126	277
WIGTRI2	9326191039133	277
WINDSCREENREPKIT	9323129058037	522
Z		
ZARA10A	9326191031458	133
ZARA1A	9326191031038	132
ZARA2A	9326191031465	132
ZARA3A	9326191031045	132
ZARA4A	9326191031052	132
ZARA5A	9326191031069	132
ZARA6A	9326191031830	133
ZARA7A	9326191031847	133
ZARA8A	9326191033360	133
ZARA9A	9326191033346	133

General Contact & Accounts Enquiries

Sydney Head Office	Unit 2 16 Ada Brookvale NSW 2100 **T:** 02 9938 7100 **F:** 02 9938 7115 **E:** sales@clalighting.com.au	P.O. Box 7245 Warringah Mall NSW 2100
National Sales Manager	**Annie Davis** **E:** annie@clalighting.com.au	
Northern NSW	**T:** 02 9938 7100 (EST 8:00AM - 5:00PM) **E:** sales@clalighting.com.au	
Sydney / Southern NSW	**Kathryn Rowan** **M:** 0403 098 651 **E:** nsw2@clalighting.com.au	
QLD	**Mary-Lou Morris** **M:** 0418 113 180 **E:** qld1@clalighting.com.au	
VIC / TAS	**Glen Symss** **M:** 0421 826 859 **E:** vic2@clalighting.com.au	
WA	**T:** 02 9938 7100 (EST 8:00AM - 5:00PM) **E:** sales@clalighting.com.au	
SA/ NT	**T:** 02 9938 7100 (EST 8:00AM - 5:00PM) **E:** sales@clalighting.com.au	

New Zealand Head Office	20C Manga Road Silverdale Auckland 0932 T: 09 427 6133 E: sales@clalighting.co.nz
North Island	**Michelle Castles** M: 021 702 031 E: northisland@clalighting.co.nz
South Island	T: 09 427 6133 E: sales@clalighting.co.nz

Notes

100% Australian
Owned Company
EST.1999



Check CLA website to view our latest products
Australia: www.clalighting.com.au
New Zealand: www.clalighting.co.nz
Facebook: www.facebook.com/clalighting
Instagram: www.instagram.com/cla.lighting